




# FUEL REPORT

Sample Rating Trend

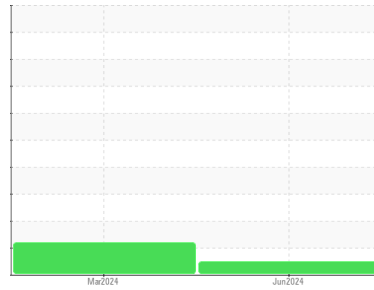

**NORMAL**



Area

**Carilion Giles Community Hospital [17642]**

Machine Id

**[Carilion Giles Community Hospital] DAY TANK 2**

Component

**Diesel Fuel**

Fluid

**No.2 DIESEL FUEL (ULTRALOW SULPHUR) (200 GAL)**

## DIAGNOSIS

### Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

### Corrosion

All metal levels are normal indicating no corrosion in the system.

### Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

### Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0957805</b>	WC06139438	---
Sample Date	Client Info			<b>23 Jun 2024</b>	22 Mar 2024	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yellow	<b>Red</b>	Red	---
ASTM Color	scalar	*ASTM D1500		<b>L5.0</b>	L4.5	---
Visc @ 40°C	cSt	ASTM D445	3.0	<b>2.46</b>	2.45	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	<b>61.4</b>	61.9	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	<b>4</b>	0	---
Sulfur (UVF)	ppm	ASTM D5453		<b>14</b>	15	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	<b>172</b>	173	---
5% Distillation Point	°C	ASTM D86		<b>195</b>	195	---
10% Distill Point	°C	ASTM D86	201	<b>205</b>	205	---
15% Distillation Point	°C	ASTM D86		<b>213</b>	213	---
20% Distill Point	°C	ASTM D86	216	<b>221</b>	221	---
30% Distill Point	°C	ASTM D86	230	<b>235</b>	236	---
40% Distill Point	°C	ASTM D86	243	<b>249</b>	249	---
50% Distill Point	°C	ASTM D86	255	<b>262</b>	262	---
60% Distill Point	°C	ASTM D86	267	<b>276</b>	276	---
70% Distill Point	°C	ASTM D86	280	<b>291</b>	290	---
80% Distill Point	°C	ASTM D86	295	<b>307</b>	306	---
85% Distillation Point	°C	ASTM D86		<b>317</b>	317	---
90% Distill Point	°C	ASTM D86	310	<b>328</b>	327	---
95% Distillation Point	°C	ASTM D86		<b>344</b>	343	---
Final Boiling Point	°C	ASTM D86	341	<b>357</b>	357	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	<b>36</b>	36	---
Cetane Index		ASTM D4737	<40.0	<b>48</b>	48	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<b>0</b>	0	---
Sodium	ppm	ASTM D5185m	<0.1	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m	<0.1	<b>1</b>	0	---
Water	%	ASTM D6304	<0.05	<b>0.003</b>	0.002	---
ppm Water	ppm	ASTM D6304	<500	<b>38</b>	16	---
% Gasoline	%	*In-House	<0.50	<b>0.0</b>	0.0	---
% Biodiesel	%	*In-House	<20.0	<b>1.3</b>	1.2	---



# FUEL REPORT

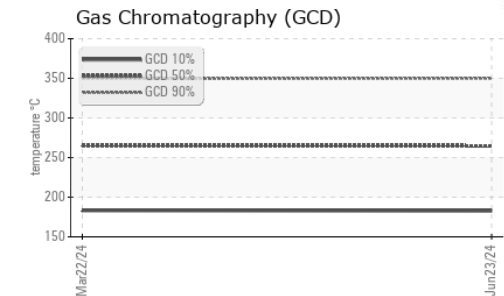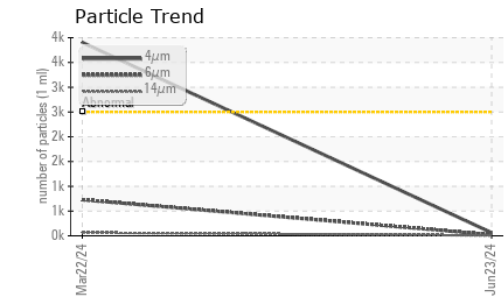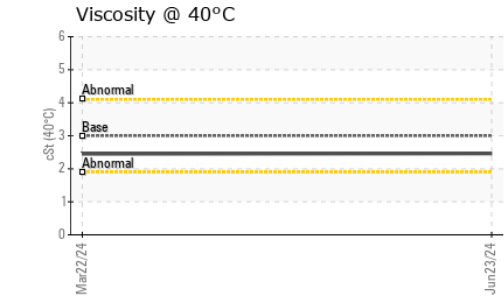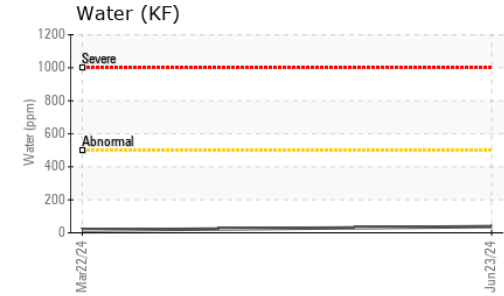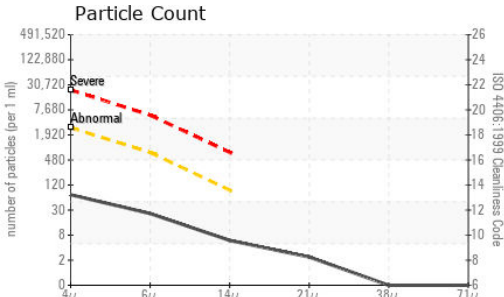

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	<b>62</b>	3905	---
Particles >6µm	ASTM D7647	>640	<b>22</b>	728	---
Particles >14µm	ASTM D7647	>80	<b>5</b>	64	---
Particles >21µm	ASTM D7647	>20	<b>2</b>	16	---
Particles >38µm	ASTM D7647	>4	<b>0</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>13/12/10</b>	19/17/13	---




HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Lead	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Iron	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Calcium	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m <0.1	<b>0</b>	0	---
Zinc	ppm	ASTM D5185m <0.1	<b>0</b>	0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

no image

no image

## GRAPHS

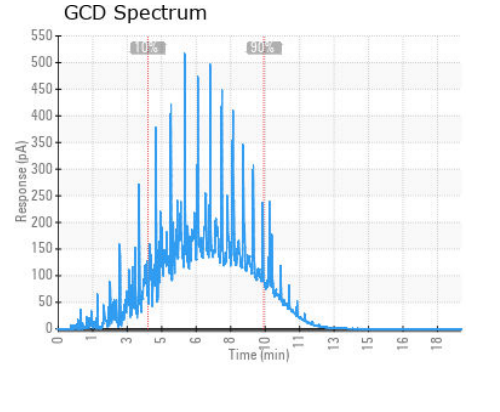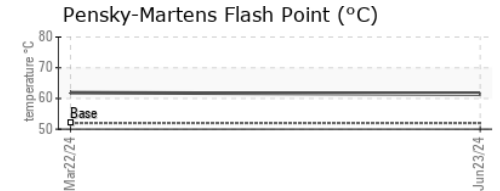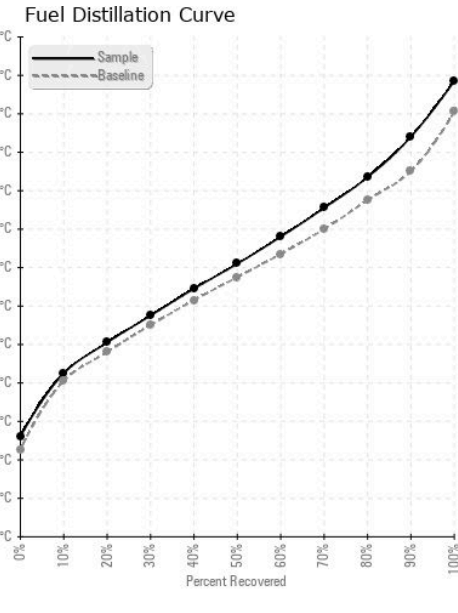

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0957805      **Received** : 24 Jun 2024  
**Lab Number** : 06218729      **Tested** : 27 Jun 2024  
**Unique Number** : 11096926      **Diagnosed** : 27 Jun 2024 - Elizabeth Valachovic  
**Test Package** : DF-2 ( Additional Tests: Fuel, Screen )

**PETROLEUM RECOVERY SERVICES**  
 210 POWELL DR  
 SUMMERVILLE, SC  
 US 29483  
 Contact: AJAY EL  
 Ajay@prsfuel.com  
 T: (843)225-1777  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)