

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7376028

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018832	KCP53895	KCPA006424
Sample Date		Client Info		19 Jun 2024	07 Feb 2024	20 Sep 2023
Machine Age	hrs	Client Info		33054	29933	28482
Oil Age	hrs	Client Info		3121	4685	0
Oil Changed		Client Info		Not Changd	Changed	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>3	<1	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	3	2	0
Lead	ppm	ASTM D5185m	>10	۲ ۲	<1	0
Copper	ppm	ASTM D5185m		4	1	13
Tin	ppm	ASTM D5185m	>10	4 <1	<1	<1
			>10	<1		
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	23	83	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	47	84	12
Calcium	ppm	ASTM D5185m	2	0	3	1
Phosphorus	ppm	ASTM D5185m		3	21	3
Zinc	ppm	ASTM D5185m		13	0	13
Sulfur	ppm	ASTM D5185m		22053	20579	21293
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	<1
Sodium		ASTM D5185m	220	6	0	5
Potassium	ppm	ASTM D5185m	>20	2	1	1
Water	ppm	ASTM D5185III ASTM D6304		2 0.144		
ppm Water	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	▲ 0.144 ▲ 1440	0.018 187	▲ 0.198▲ 1980
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			8988	
Particles >6µm		ASTM D7647	>1300		▲ 2312	
Particles >14µm		ASTM D7647 ASTM D7647	>80		▲ 230	
Particles >21µm		ASTM D7647 ASTM D7647	>20		▲ 59	
Particles >38µm		ASTM D7647	>4		3	
Particles >71µm		ASTM D7647			0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		<u>20/18/15</u>	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN) 21:14) Rev: 1	mg KOH/g	ASTM D8045		0.40 Contact/Locatio	0.37 n: Service Man	0.25


Report Id: MENNEE [WUSCAR] 06218776 (Generated: 06/28/2024 10:21:14) Rev: 1


Contact/Location: Service Manager - MENNEE



OIL ANALYSIS REPORT








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	0.2%	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.3	43.8	43.9
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

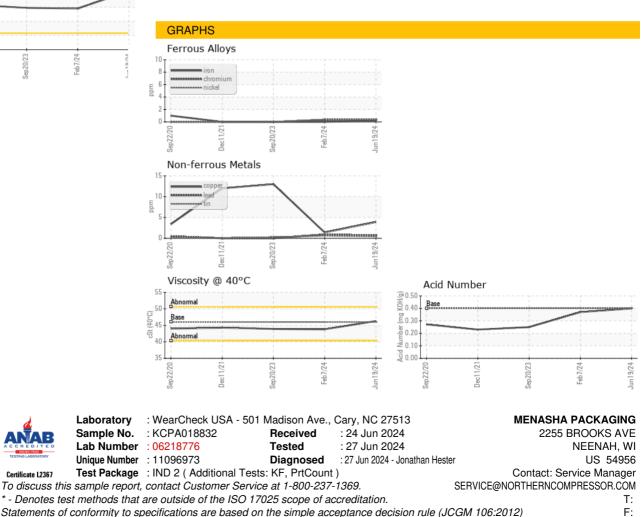

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: Service Manager - MENNEE