

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER SX 7 1975253 (S/N 1051)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | IATION | method | limit/base | current | history1 | history2 |
|--|-------------------------------|--|---|---|---|--|
| Sample Number | | Client Info | | KCPA018945 | KCP40360D | KCP45544 |
| Sample Date | | Client Info | | 12 Jun 2024 | 21 Dec 2022 | 28 Apr 2022 |
| Machine Age | hrs | Client Info | | 39514 | 35667 | 33930 |
| Oil Age | hrs | Client Info | | 0 | 0 | 2268 |
| Oil Changed | | Client Info | | Changed | Not Changd | Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 1 | 1 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | 3 | 0 | <1 |
| Lead | ppm | ASTM D5185m | >10 | ۲ ۲ | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 16 | 6 | 4 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 4 <1 |
| Antimony | ppm | ASTM D5185m | ~10 | | | |
| Vanadium | | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | | | <1 | 0 | 0 |
| | ppm | ASTM D5185m | | <1 | - | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | 1 |
| Barium | ppm | ASTM D5185m | | 1 | 18 | 10 |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 100 | <1 | 43 | 52 |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 1 | 1 |
| Phosphorus | ppm | ASTM D5185m | 0 | 4 | 2 | 1 |
| Zinc | ppm | ASTM D5185m | 0 | 14 | 33 | 15 |
| Sulfur | ppm | ASTM D5185m | 23500 | 21039 | 18394 | 16891 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silioon | ppm | | | | | |
| SIIICOTI | ppiii | ASTM D5185m | >25 | <1 | 1 | 0 |
| Sodium | | ASTM D5185m ASTM D5185m | >25 | <1 0 | 1 16 | 0 16 |
| Silicon Sodium Potassium | ppm | | | | | - |
| Sodium Potassium | ppm ppm | ASTM D5185m ASTM D5185m | >20 | 0 2 | 16 3 | 16 2 |
| Sodium | ppm | ASTM D5185m | >20 | 0 | 16 | 16 |
| Sodium Potassium Water | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 | >20 >0.05 | 0 2 0.007 | 16 3 0.016 | 16 2 0.014 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 | >20 >0.05 >500 | 0 2 0.007 80 | 16 3 0.016 160.2 | 16 2 0.014 146.1 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method | >20 >0.05 >500 limit/base | 0 2 0.007 80 current | 16 3 0.016 160.2 history1 | 16 2 0.014 146.1 history2 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 | >20 >0.05 >500 limit/base | 0 2 0.007 80 current 7834 | 16 3 0.016 160.2 history1 15491 | 16 2 0.014 146.1 history2 24358 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 | 0 2 0.007 80 <u>current</u> 7834 ▲ 2471 | 16 3 0.016 160.2 history1 15491 ▲ 5487 | 16 2 0.014 146.1 history2 24358 ▲ 8403 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 | 0 2 0.007 80 <u>current</u> 7834 ▲ 2471 ▲ 183 | 16 3 0.016 160.2 history1 15491 ▲ 5487 ▲ 309 | 16 2 0.014 146.1 24358 ▲ 8403 ▲ 732 ▲ 109 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 >20 >4 | 0 2 0.007 80 <u>current</u> 7834 ▲ 2471 ▲ 183 ▲ 35 1 | 16 3 0.016 160.2 history1 15491 ▲ 5487 ▲ 309 ▲ 67 3 | 16 2 0.014 146.1 24358 ▲ 8403 ▲ 732 ▲ 109 3 |
| Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 >20 >4 | 0 2 0.007 80 <u>current</u> 7834 ▲ 2471 ▲ 183 ▲ 35 | 16 3 0.016 160.2 history1 15491 ▲ 5487 ▲ 309 ▲ 67 | 16 2 0.014 146.1 24358 ▲ 8403 ▲ 732 ▲ 109 |
| Sodium Potassium Water ppm Water | ppm ppm % ppm ESS | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3 | 0 2 0.007 80 current 7834 ▲ 2471 ▲ 183 ▲ 35 1 0 | 16 3 0.016 160.2 history1 15491 ▲ 5487 ▲ 309 ▲ 67 3 0 | 16 2 0.014 146.1 history2 24358 ▲ 8403 ▲ 732 ▲ 109 3 0 |


Report Id: MILELKMD [WUSCAR] 06218784 (Generated: 06/27/2024 13:01:54) Rev: 1


Contact/Location: Service Manager - MILELKMD



OIL ANALYSIS REPORT

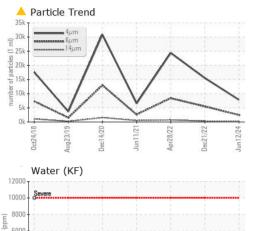




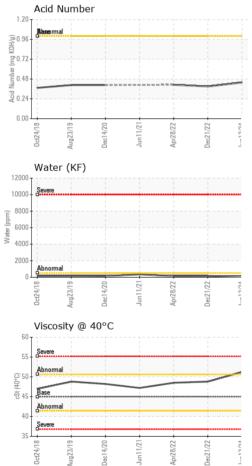



Bottom

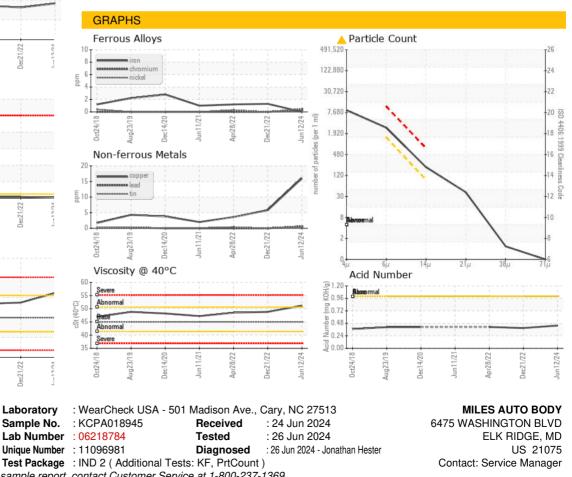

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: Service Manager - MILELKMD Page 2 of 2

T:

F: