



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**INTERMEDIATE FREEZER GRBX (S/N RA0630-14)**  
 Component  
**Gearbox**  
 Fluid  
**FUCHS CASSIDA GL 220 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>USP0013067</b>	USP0006087	---
Sample Date	Client Info			<b>20 Jun 2024</b>	17 Mar 2024	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>4</b>	12	---
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>7</b>	33	---
Phosphorus	ppm	ASTM D5185m		<b>535</b>	483	---
Zinc	ppm	ASTM D5185m		<b>4</b>	4	---
Sulfur	ppm	ASTM D5185m		<b>472</b>	600	---






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>1</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	---
Water	%	ASTM D6304	>0.2	<b>0.003</b>	0.001	---
ppm Water	ppm	ASTM D6304	>2000	<b>30</b>	3	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>▲ 45213</b>	▲ 44083	---
Particles >6µm		ASTM D7647	>5000	<b>● 7690</b>	2320	---
Particles >14µm		ASTM D7647	>640	<b>234</b>	46	---
Particles >21µm		ASTM D7647	>160	<b>38</b>	6	---
Particles >38µm		ASTM D7647	>40	<b>3</b>	0	---
Particles >71µm		ASTM D7647	>10	<b>1</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>▲ 23/20/15</b>	▲ 23/18/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.38</b>	0.36	---




# OIL ANALYSIS REPORT

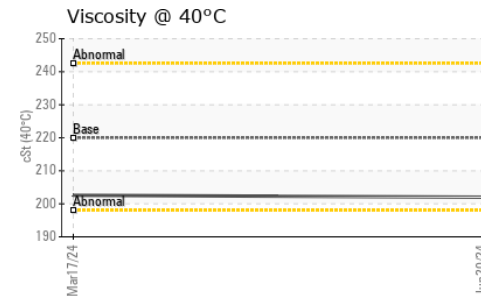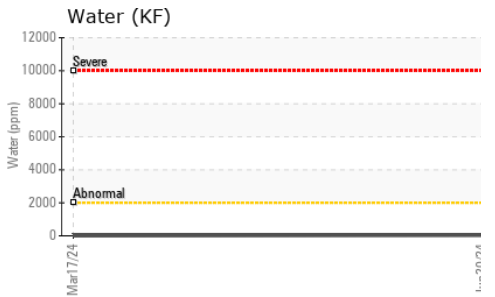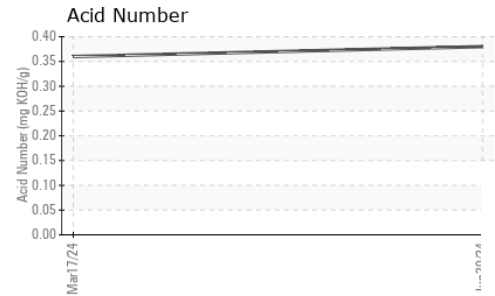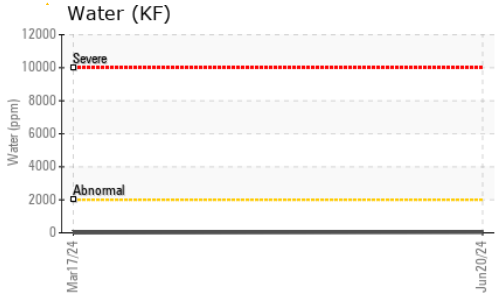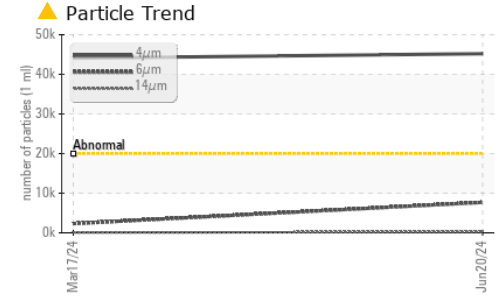






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	202	202.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

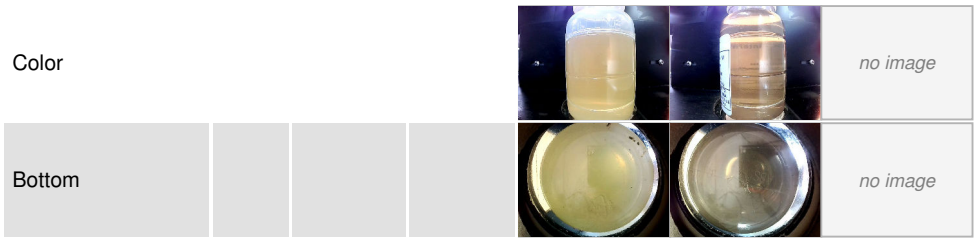

## GRAPHS

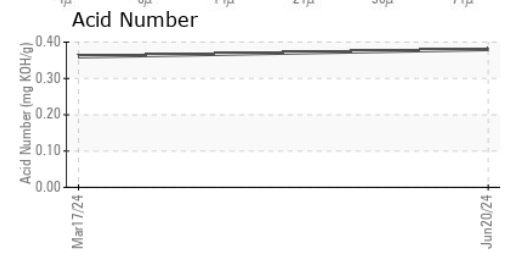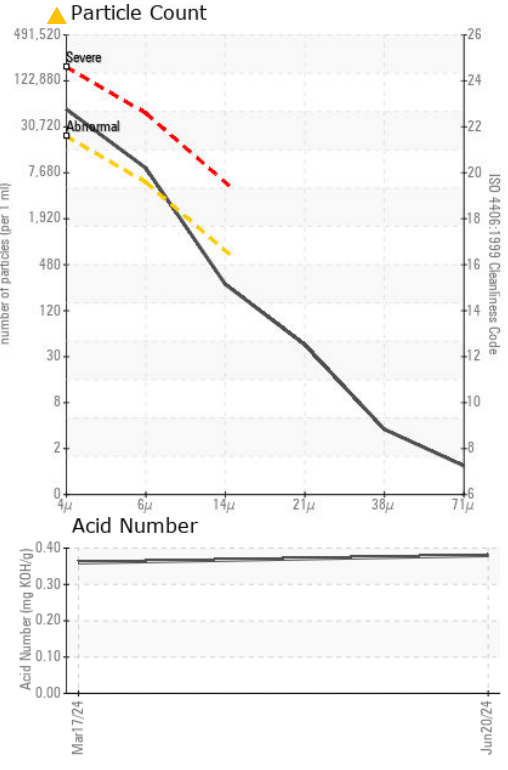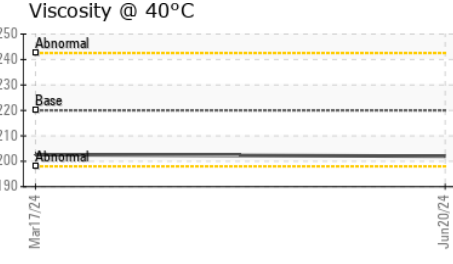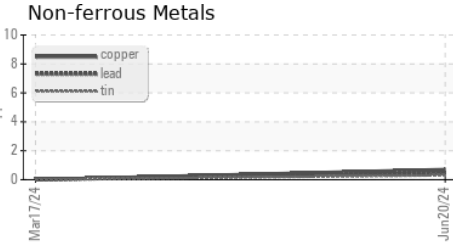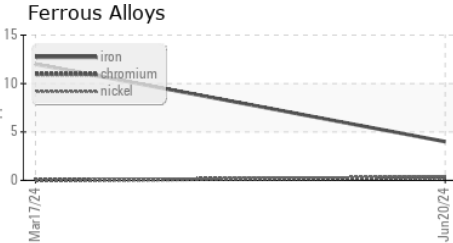

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0013067  
**Lab Number** : 06218810  
**Unique Number** : 11097007  
**Test Package** : IND 2  
**Received** : 24 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 26 Jun 2024 - Doug Bogart

**TYSON DOSK -HUTCHINSON - USP**  
 HUTCHINSON, KS  
 US  
 Contact: SCOTT OWEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (620)669-2871  
 F: