




OIL ANALYSIS REPORT

Sample Rating Trend

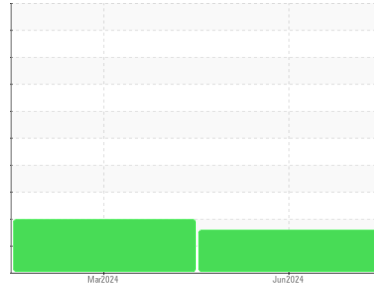

WEAR



Machine Id
DRUM DRIVE BEARING BOX (S/N RA0630-14)
 Component
Gearbox
 Fluid
FUCHS CASSIDA GL 680 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

● Wear

An increase in the iron level is noted.

▲ Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			USP0013065	USP0006093	---
Sample Date	Client Info			20 Jun 2024	17 Mar 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	● 152	10	---
Chromium	ppm	ASTM D5185m	>15	1	0	---
Nickel	ppm	ASTM D5185m	>15	1	0	---
Titanium	ppm	ASTM D5185m		1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	3	0	---
Lead	ppm	ASTM D5185m	>100	<1	0	---
Copper	ppm	ASTM D5185m	>200	<1	0	---
Tin	ppm	ASTM D5185m	>25	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		1	0	---
Magnesium	ppm	ASTM D5185m		1	0	---
Calcium	ppm	ASTM D5185m		1	0	---
Phosphorus	ppm	ASTM D5185m		521	491	---
Zinc	ppm	ASTM D5185m		4	1	---
Sulfur	ppm	ASTM D5185m		447	680	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	<1	---
Sodium	ppm	ASTM D5185m		0	0	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water	%	ASTM D6304	>0.2	0.003	0.001	---
ppm Water	ppm	ASTM D6304	>2000	33	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	---	▲ 166196	---
Particles >6µm		ASTM D7647	>5000	---	▲ 96135	---
Particles >14µm		ASTM D7647	>640	---	▲ 2813	---
Particles >21µm		ASTM D7647	>160	---	▲ 219	---
Particles >38µm		ASTM D7647	>40	---	2	---
Particles >71µm		ASTM D7647	>10	---	0	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	---	▲ 25/24/19	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.37	0.51	---




OIL ANALYSIS REPORT

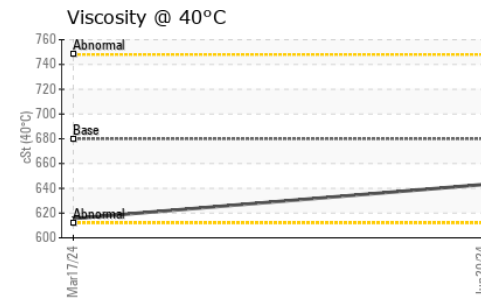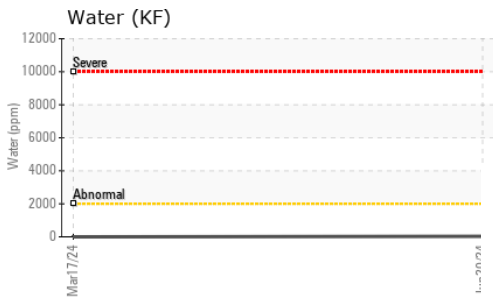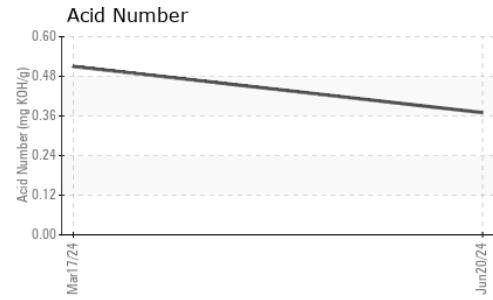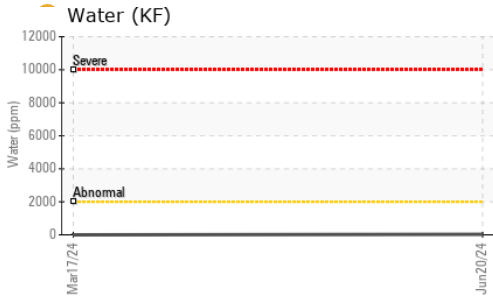





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	▲ MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 680	643	615.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

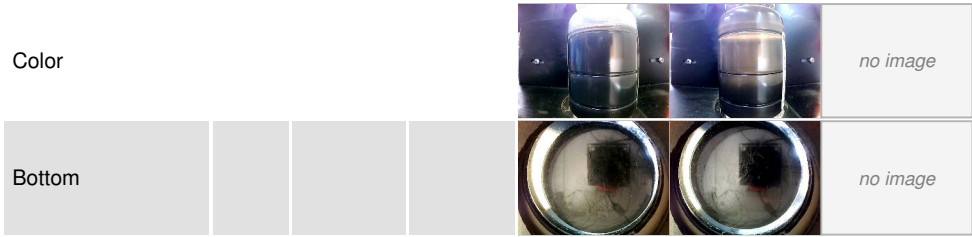

GRAPHS

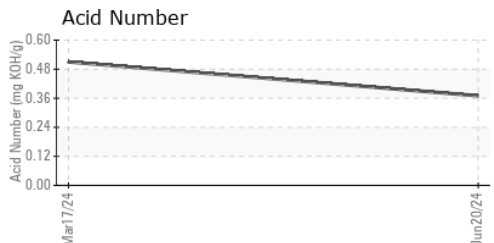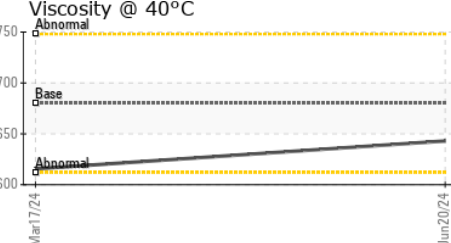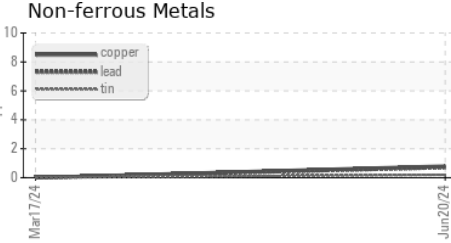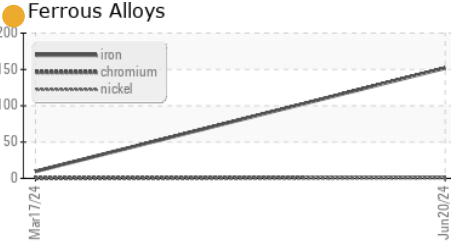

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP0013065
Lab Number : 06218811
Unique Number : 11097008
Test Package : IND 2

TYSON DOSK -HUTCHINSON - USP
 HUTCHINSON, KS
 US
 Contact: SCOTT OWEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (620)669-2871
F: