




# OIL ANALYSIS REPORT

## Sample Rating Trend

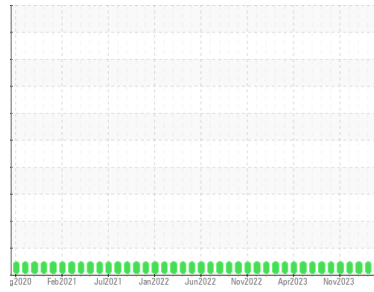

**NORMAL**



Area

**JOHN R OPERLE**

Machine Id

**[JOHN R OPERLE] 003 630998-3**

Component

**Starboard Main Engine**

Fluid

**CHEVRON DELO 710 LS (300 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>MW0066233</b>	MW0066012	MW0061534
Sample Date	Client Info			<b>01 Jun 2024</b>	03 May 2024	02 Jan 2024
Machine Age	hrs	Client Info		<b>62352</b>	61657	61473
Oil Age	hrs	Client Info		<b>14324</b>	13629	19344
Oil Changed	Client Info			<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>24</b>	24	19
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	1	2
Lead	ppm	ASTM D5185m	>18	<b>6</b>	6	3
Copper	ppm	ASTM D5185m	>80	<b>27</b>	24	25
Tin	ppm	ASTM D5185m	>14	<b>5</b>	4	4
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>40</b>	42	30
Barium	ppm	ASTM D5185m		<b>1</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	45	45
Manganese	ppm	ASTM D5185m		<b>2</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>10</b>	12	14
Calcium	ppm	ASTM D5185m		<b>3534</b>	3569	3397
Phosphorus	ppm	ASTM D5185m		<b>20</b>	0	2
Zinc	ppm	ASTM D5185m		<b>5</b>	12	6
Sulfur	ppm	ASTM D5185m		<b>2719</b>	2762	2234

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	>75	<b>&lt;1</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.4</b>	1.5	1.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	8.6	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.8</b>	18.4	18.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.8</b>	8.2	7.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.15</b>	9.00	9.42




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

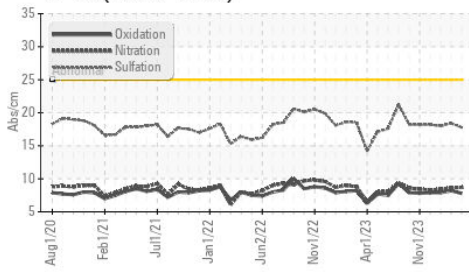

Base Number

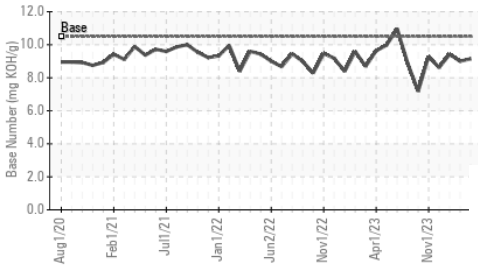

Viscosity @ 100°C

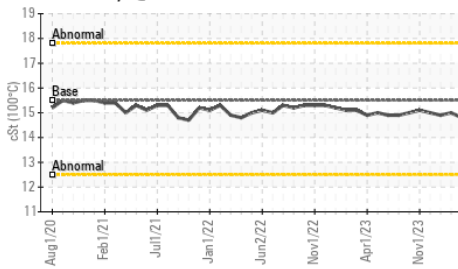


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.8</b>	15.0	14.9

## GRAPHS


Ferrous Alloys

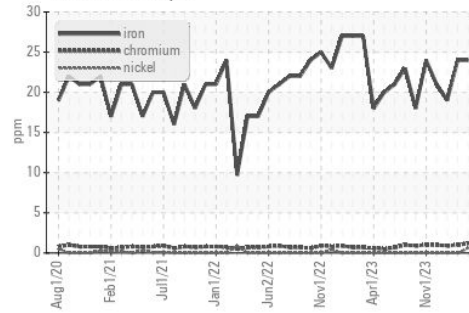


Non-ferrous Metals

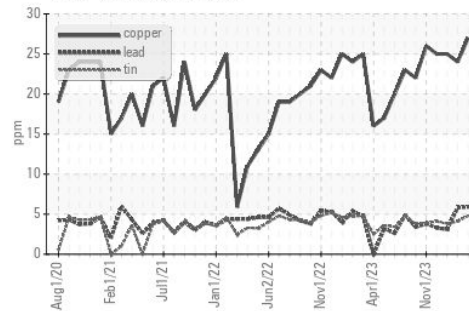

Viscosity @ 100°C

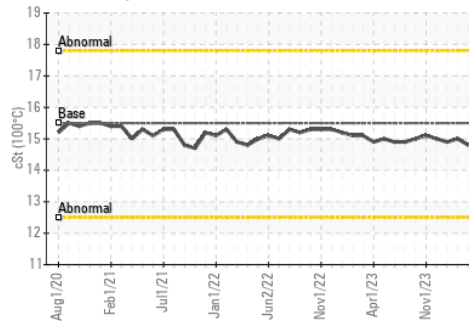

Base Number

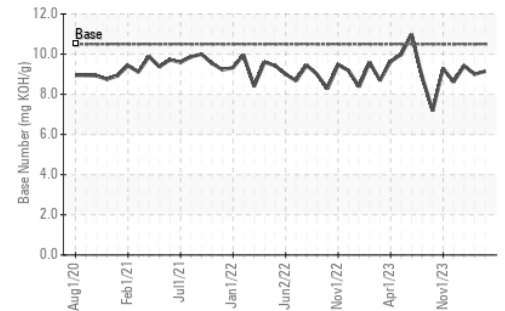

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0066233  
**Lab Number** : 06218905  
**Unique Number** : 11097102  
**Test Package** : MAR 2

**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ALLEN WILLHELM  
 allen.willhelm@ingrambarga.com

T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)