




# OIL ANALYSIS REPORT

Sample Rating Trend

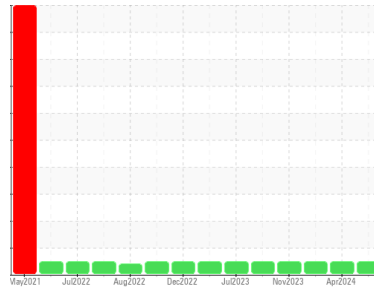

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**040663**  
 Component  
**Gasoline Engine**  
 Fluid  
**MOBIL 1 5W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0006786</b>	SBP0005769	SBP0006345
Sample Date	Client Info		<b>13 Jun 2024</b>	18 Apr 2024	14 Feb 2024
Machine Age	hrs	Client Info	<b>5720</b>	5398	5051
Oil Age	hrs	Client Info	<b>322</b>	347	177
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>47</b>	59	87
Chromium	ppm	ASTM D5185m >20	<b>3</b>	3	3
Nickel	ppm	ASTM D5185m >5	<b>1</b>	1	1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>4</b>	4	4
Lead	ppm	ASTM D5185m >50	<b>2</b>	<1	0
Copper	ppm	ASTM D5185m >155	<b>12</b>	16	13
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 94	<b>29</b>	41	40
Barium	ppm	ASTM D5185m 0.0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 0.0	<b>68</b>	70	66
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1388	<b>526</b>	490	486
Calcium	ppm	ASTM D5185m 820	<b>1316</b>	1212	1076
Phosphorus	ppm	ASTM D5185m 720	<b>694</b>	630	650
Zinc	ppm	ASTM D5185m 780	<b>822</b>	766	733
Sulfur	ppm	ASTM D5185m 2240	<b>3218</b>	2761	2471

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>10</b>	10	11
Sodium	ppm	ASTM D5185m >400	<b>4</b>	6	4
Potassium	ppm	ASTM D5185m >20	<b>5</b>	3	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	10.9	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.7</b>	22.1	22.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.1</b>	17.4	16.7
Base Number (BN)	mg KOH/g	ASTM D2896	<b>3.1</b>	3.4	2.9




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

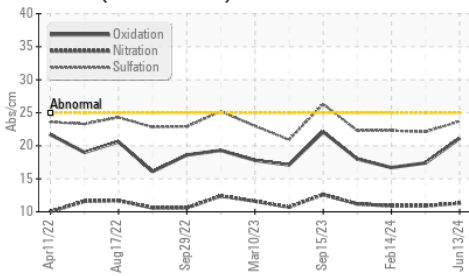

Base Number

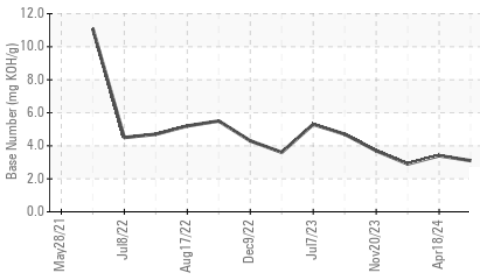

Viscosity @ 100°C

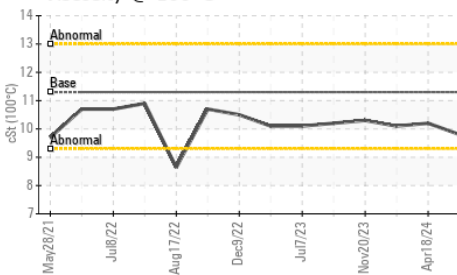


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.3	9.8	10.2

GRAPHS


Ferrous Alloys

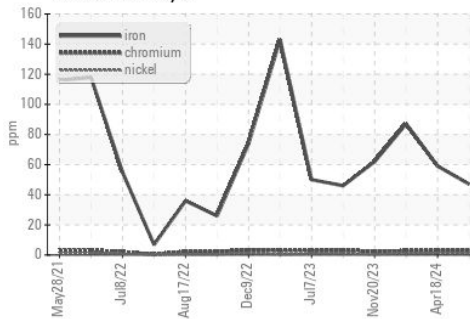


Non-ferrous Metals

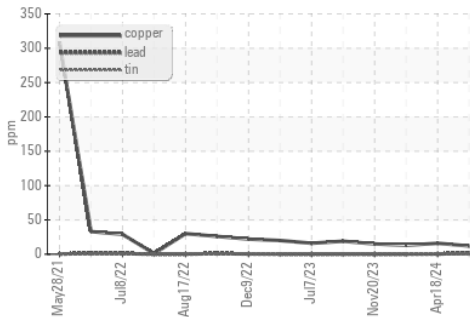

Viscosity @ 100°C

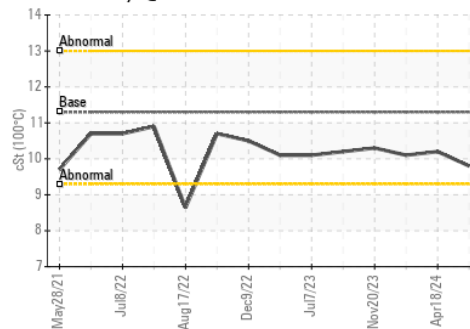

Base Number

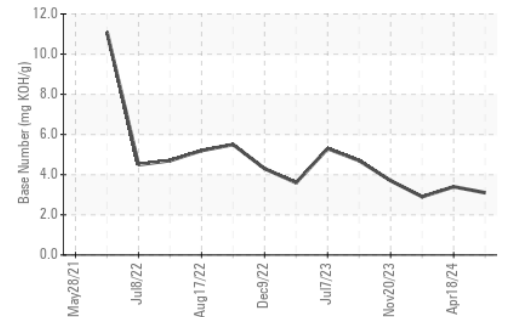

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : SBP0006786  
 Lab Number : 06219011  
 Unique Number : 11097208  
 Test Package : FLEET

Received : 24 Jun 2024  
 Tested : 26 Jun 2024  
 Diagnosed : 26 Jun 2024 - Wes Davis

Constructors Inc. - 603659

1815 Y Street  
 Lincoln, NE  
 US 68508

Contact: Loren Michael  
 LorenM@constructorslincoln.com  
 T: (402)434-2157

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: