




OIL ANALYSIS REPORT

Sample Rating Trend

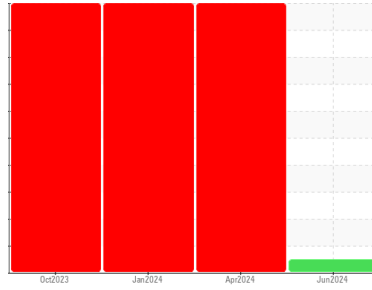

NORMAL



Machine Id

0806

Component

Diesel Engine

Fluid

DISEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0897838	WC0894024	WC0868181
Sample Date	Client Info		10 Jun 2024	17 Apr 2024	09 Jan 2024
Machine Age	mls	Client Info	0	0	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	41	▲ 109	▲ 139
Chromium	ppm	ASTM D5185m >20	1	3	3
Nickel	ppm	ASTM D5185m >4	0	0	2
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	4	● 7
Lead	ppm	ASTM D5185m >40	0	<1	2
Copper	ppm	ASTM D5185m >330	2	11	25
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<1	5	57
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	56	58	127
Manganese	ppm	ASTM D5185m	<1	1	1
Magnesium	ppm	ASTM D5185m 450	893	789	827
Calcium	ppm	ASTM D5185m 3000	1026	▲ 851	928
Phosphorus	ppm	ASTM D5185m 1150	903	833	924
Zinc	ppm	ASTM D5185m 1350	1164	1003	1145
Sulfur	ppm	ASTM D5185m 4250	3225	2687	3300

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	15	▲ 25	▲ 63
Sodium	ppm	ASTM D5185m >158	41	▲ 271	▲ 1904
Potassium	ppm	ASTM D5185m >20	39	▲ 209	▲ 1198
Fuel	%	ASTM D3524 >5	<1.0	▲ 17.3	<1.0
Glycol	%	*ASTM D2982	NEG	▲ 0.10	▲ 0.20

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	1.1	0.7
Nitration	Abs/cm	*ASTM D7624 >20	12.0	17.1	15.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	33.2	47.8	28.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	44.1	77.3	27.5
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	3.5	▲ 0.0	11.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

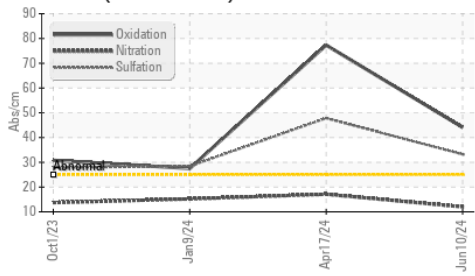


Fuel Dilution

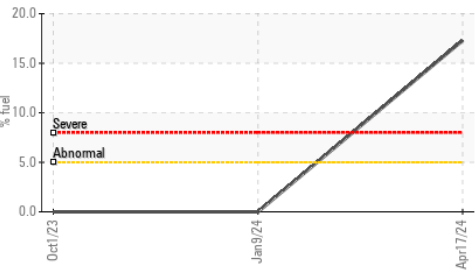


Glycol Contamination

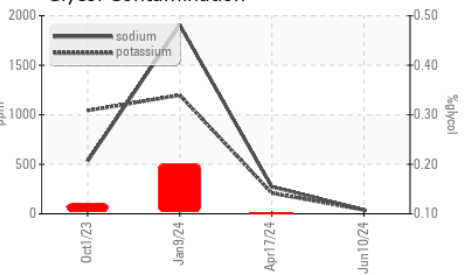

Fuel Dilution

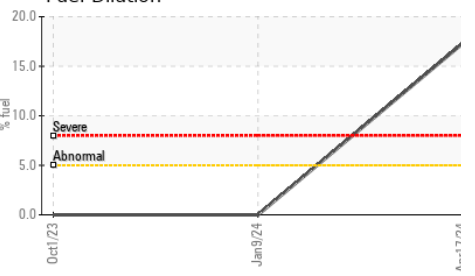

Glycol Contamination

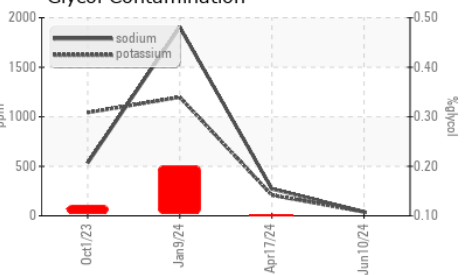


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES			method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4		12.9	▲ 10.5	12.7

GRAPHS


Iron (ppm)

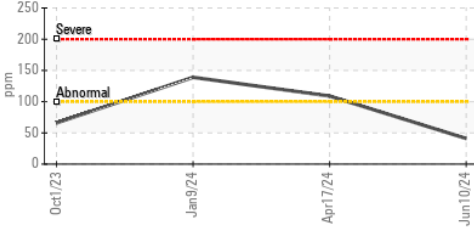


Lead (ppm)

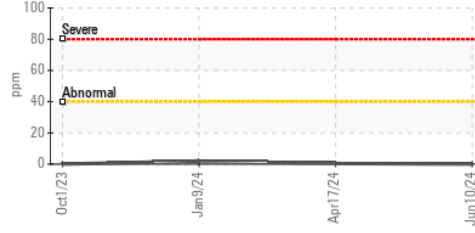


Aluminum (ppm)

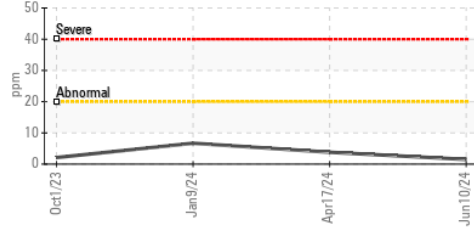


Chromium (ppm)

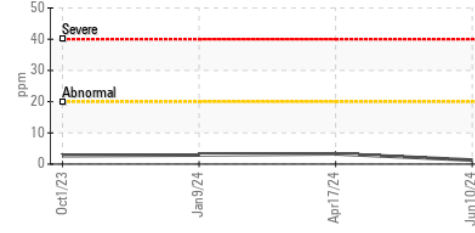


Copper (ppm)

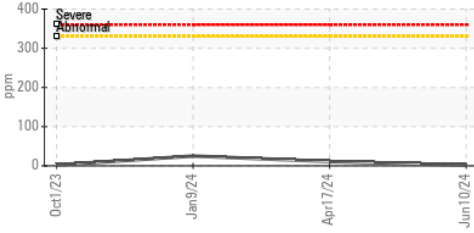


Silicon (ppm)

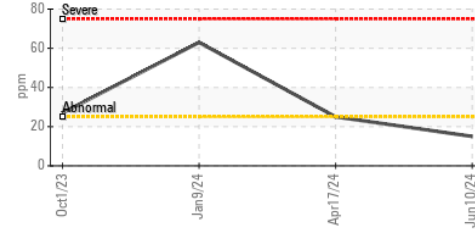

Viscosity @ 100°C

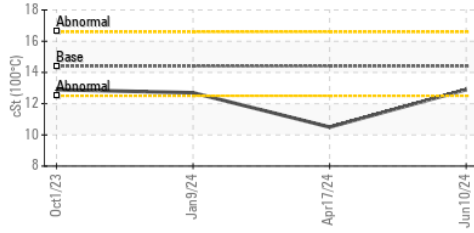

Base Number

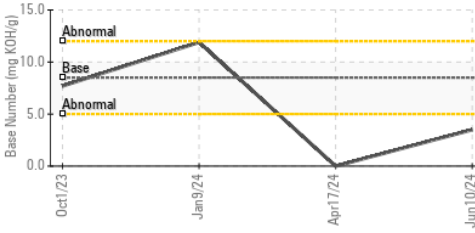

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0897838 **Received** : 24 Jun 2024
Lab Number : 06219138 **Tested** : 26 Jun 2024
Unique Number : 11097335 **Diagnosed** : 26 Jun 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

GO DURHAM - RAPT
 1903 FAYETTEVILLE ST
 DURHAM, NC
 US 27701
 Contact: Robert Iosiniecki
 Robert.iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)