




# OIL ANALYSIS REPORT

Sample Rating Trend

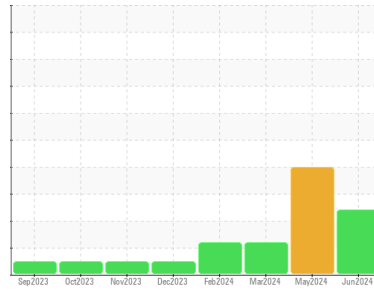

GLYCOL



Machine Id

**1003**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0897883</b>	WC0897889	WC0894001
Sample Date	Client Info		<b>12 Jun 2024</b>	04 May 2024	18 Mar 2024
Machine Age	mls	Client Info	<b>902988</b>	0	0
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>29</b>	22	16
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	3	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>4</b>	0	<1
Barium	ppm	ASTM D5185m	10	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	100	<b>69</b>	72	68
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>1090</b>	1029	1084
Calcium	ppm	ASTM D5185m	3000	<b>1285</b>	1176	1183
Phosphorus	ppm	ASTM D5185m	1150	<b>1121</b>	1215	1138
Zinc	ppm	ASTM D5185m	1350	<b>1454</b>	1349	1403
Sulfur	ppm	ASTM D5185m	4250	<b>3538</b>	3330	3888

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>18</b>	▲ 25	8
Sodium	ppm	ASTM D5185m	>158	▲ <b>51</b>	▲ 56	25
Potassium	ppm	ASTM D5185m	>20	▲ <b>74</b>	▲ 85	▲ 40
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>1.9</b>	1.3	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	10.1	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.9</b>	23.1	21.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.3</b>	18.4	17.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.6</b>	7.6	7.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

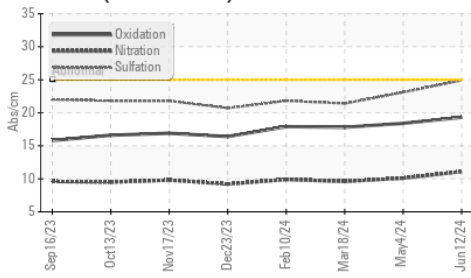


Glycol Contamination

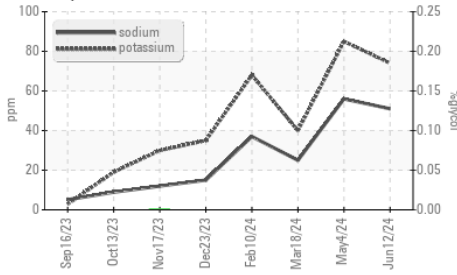

Viscosity @ 100°C

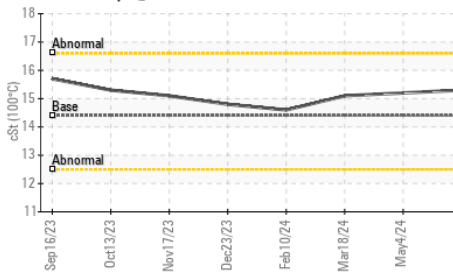

Glycol Contamination

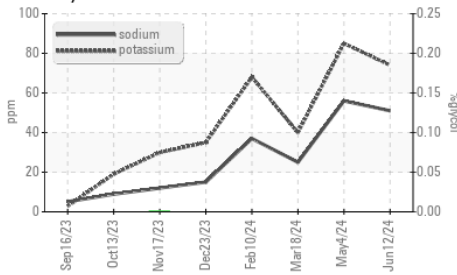

Viscosity @ 100°C




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	15.3	15.2

GRAPHS


Iron (ppm)

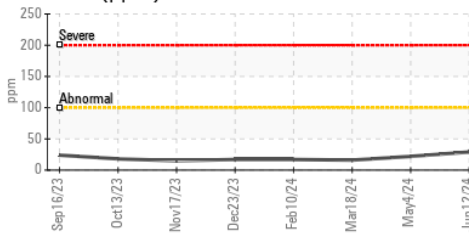


Lead (ppm)

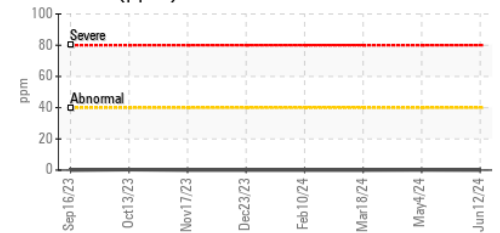


Aluminum (ppm)

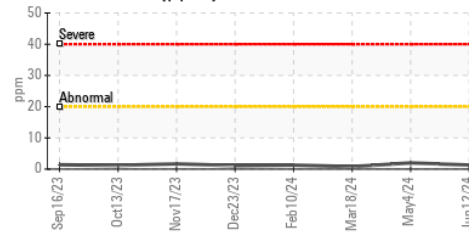


Chromium (ppm)

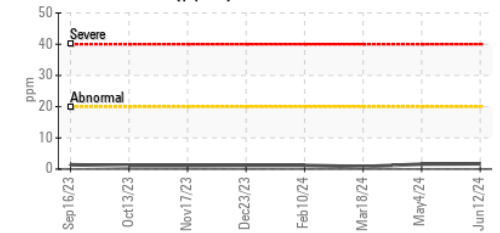


Copper (ppm)

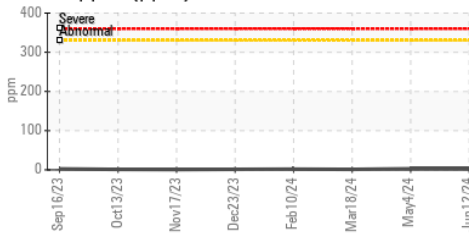


Silicon (ppm)

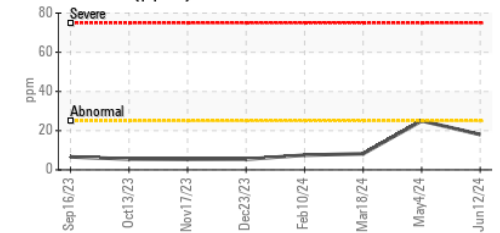

Viscosity @ 100°C

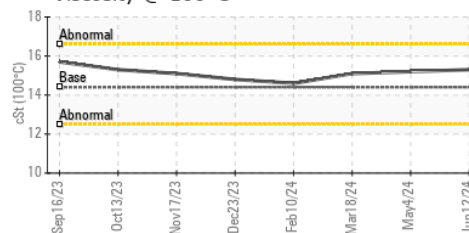

Base Number

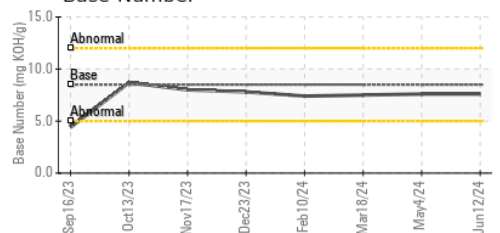

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0897883

Lab Number : 06219145

Unique Number : 11097342

Test Package : MOB 1 ( Additional Tests: Glycol, TBN )

Received : 24 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Jonathan Hester

GO DURHAM - RAPT

1903 FAYETTEVILLE ST

DURHAM, NC

US 27701

Contact: Robert Losiniecki

Robert.losiniecki@ratpdev.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)