




# OIL ANALYSIS REPORT

Sample Rating Trend

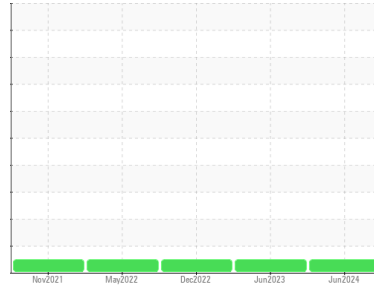

**NORMAL**



Area  
**[23361]**  
 Machine Id  
**80-249**  
 Component  
**Diesel Engine**  
 Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>WC0940743</b>	WC0802383	WC0709384	
Sample Date	Client Info	<b>17 Jun 2024</b>	23 Jun 2023	06 Dec 2022	
Machine Age	hrs	Client Info	<b>1623</b>	1099	738
Oil Age	hrs	Client Info	<b>524</b>	361	233
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>23</b>	17	17
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>13</b>	10	22
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 85	<b>90</b>	88	91
Barium	ppm	ASTM D5185m	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>6</b>	26	10
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 350	<b>633</b>	512	693
Calcium	ppm	ASTM D5185m 1800	<b>1294</b>	1650	1363
Phosphorus	ppm	ASTM D5185m 1000	<b>962</b>	1017	1081
Zinc	ppm	ASTM D5185m 1100	<b>1157</b>	1234	1241
Sulfur	ppm	ASTM D5185m 3500	<b>3615</b>	4487	4577

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>5</b>	3	4

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.3</b>	7.8	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.3</b>	18.0	18.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>11.8</b>	11.9	12.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	<b>8.4</b>	8.1	9.0







# OIL ANALYSIS REPORT

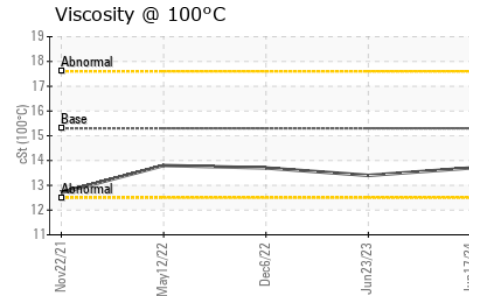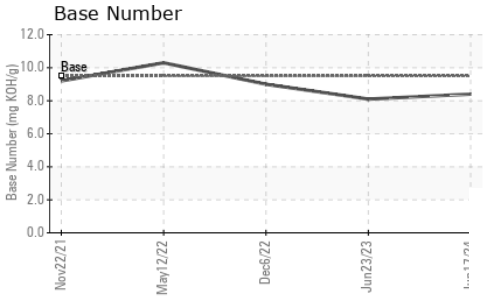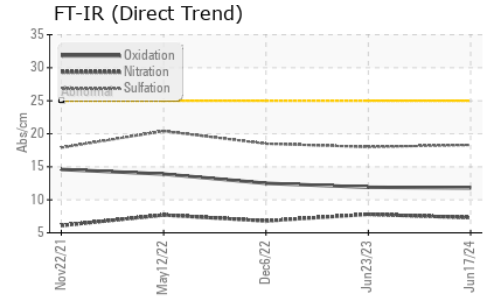

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.7</b>	13.4	13.7

### GRAPHS

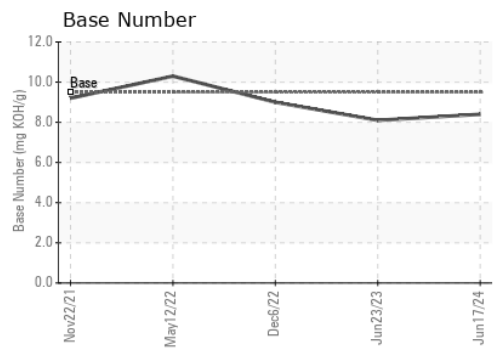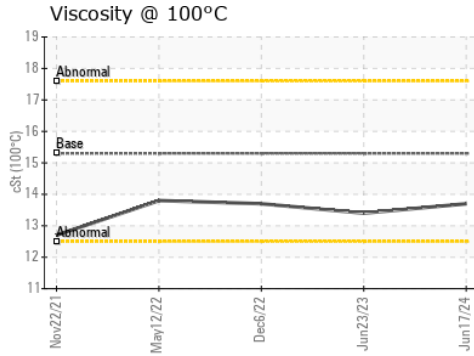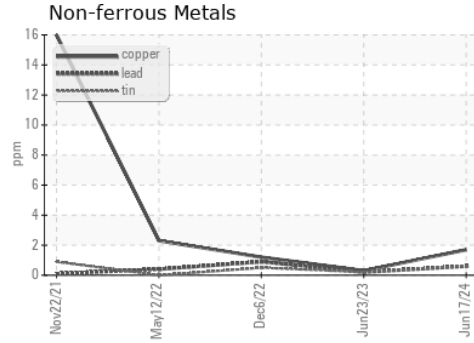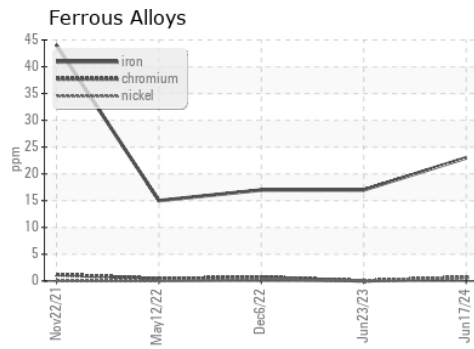

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0940743      **Received** : 25 Jun 2024  
**Lab Number** : **06219462**      **Tested** : 26 Jun 2024  
**Unique Number** : 11097659      **Diagnosed** : 26 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**MANHATTAN ROAD AND BRIDGE**  
 5601 S 122ND E AVE  
 TULSA, OK  
 US 74146  
 Contact: BEN CALDWELL  
 kevin.marson@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)