


OIL ANALYSIS REPORT



Area
[LEOTERRA SITE WORKS]
 Machine Id
JOHN DEERE 310E 1DW310EXANF714390
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

Sample Rating Trend

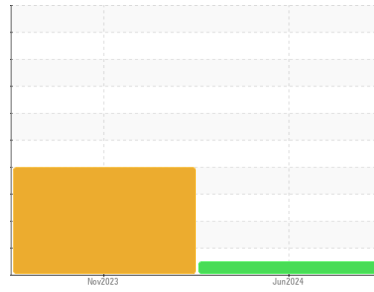

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0182739	JR0194219	---
Sample Date	Client Info			24 Jun 2024	19 Nov 2023	---
Machine Age	hrs	Client Info		1768	2810	---
Oil Age	hrs	Client Info		200	0	---
Oil Changed	Client Info			Not Chngd	N/A	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	---	---
Water	WC Method	>0.21	NEG	NEG	---	---
Glycol	WC Method		NEG	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	36	▲ 163	---
Chromium	ppm	ASTM D5185m	>11	2	▲ 15	---
Nickel	ppm	ASTM D5185m	>5	1	6	---
Titanium	ppm	ASTM D5185m		<1	2	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>31	6	● 21	---
Lead	ppm	ASTM D5185m	>26	1	<1	---
Copper	ppm	ASTM D5185m	>26	3	24	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		<1	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		264	354	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		226	80	---
Manganese	ppm	ASTM D5185m		1	1	---
Magnesium	ppm	ASTM D5185m		685	307	---
Calcium	ppm	ASTM D5185m		1370	1478	---
Phosphorus	ppm	ASTM D5185m		809	1055	---
Zinc	ppm	ASTM D5185m		1025	1252	---
Sulfur	ppm	ASTM D5185m		2836	3463	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	16	▲ 71	---
Sodium	ppm	ASTM D5185m	>31	<1	5	---
Potassium	ppm	ASTM D5185m	>20	3	4	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.2	6.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	20.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	14.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.7	8.1	---





OIL ANALYSIS REPORT

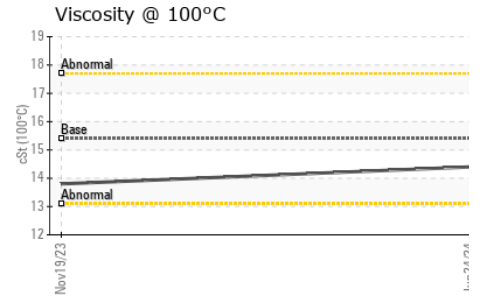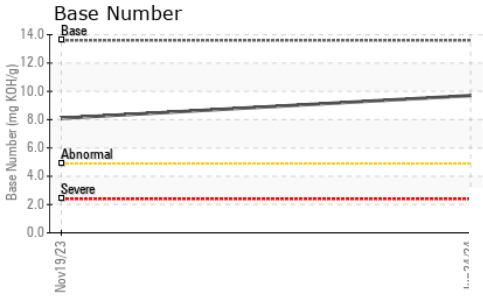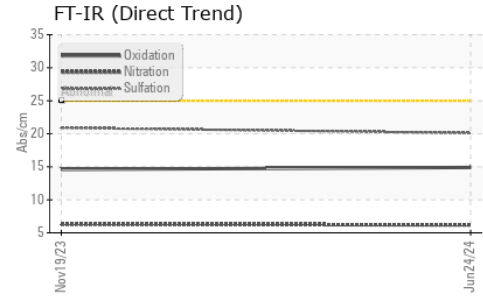

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	13.8	---

GRAPHS

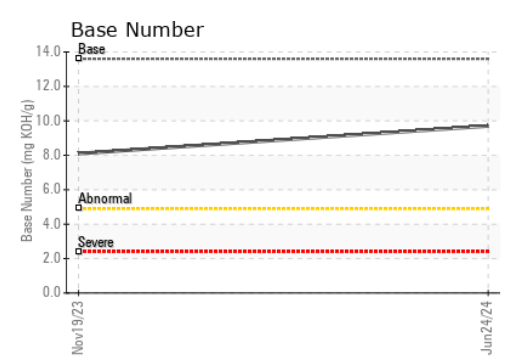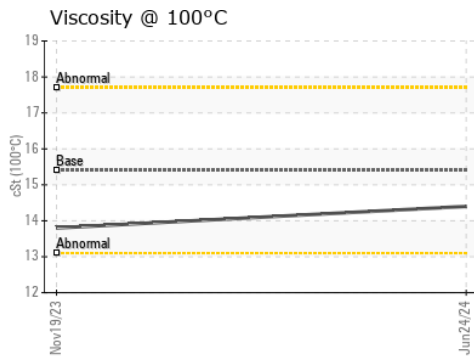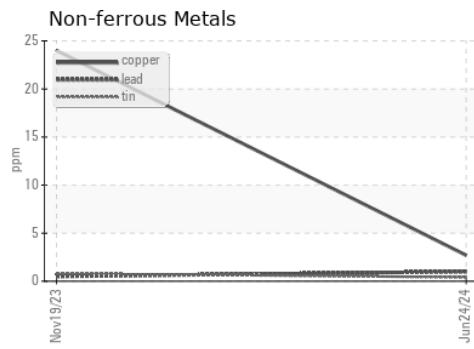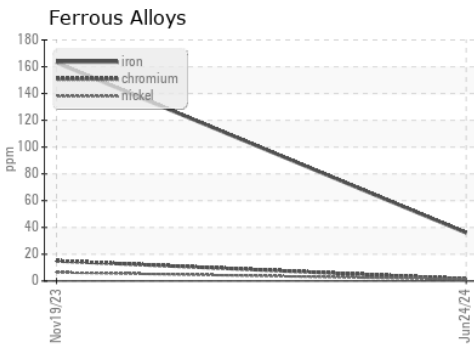

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0182739 **Received** : 25 Jun 2024
Lab Number : **06219490** **Tested** : 26 Jun 2024
Unique Number : 11097687 **Diagnosed** : 26 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)