


OIL ANALYSIS REPORT



Area
[W52632 ADVANSIX]
 Machine Id
JOHN DEERE 824K 1DW824KXTHF680767
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

Sample Rating Trend

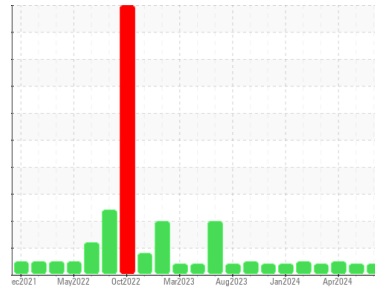

VISCOSITY



DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0212028	JR0212210	JR0211507
Sample Date	Client Info		24 Jun 2024	29 May 2024	26 Apr 2024
Machine Age	hrs	Client Info	12044	11678	11156
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			MARGINAL	MARGINAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	<1.0
Water	WC Method	>0.21	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	6	5	9
Chromium	ppm	ASTM D5185m	>11	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>31	4	5	8
Lead	ppm	ASTM D5185m	>26	1	1	3
Copper	ppm	ASTM D5185m	>26	2	<1	2
Tin	ppm	ASTM D5185m	>4	<1	<1	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		228	214	308
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		221	201	289
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		687	647	816
Calcium	ppm	ASTM D5185m		1426	1398	2388
Phosphorus	ppm	ASTM D5185m		835	875	1370
Zinc	ppm	ASTM D5185m		1058	991	1612
Sulfur	ppm	ASTM D5185m		3081	3397	5229

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	7	6	11
Sodium	ppm	ASTM D5185m	>31	2	5	6
Potassium	ppm	ASTM D5185m	>20	3	2	5




INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.1	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.9	8.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	21.8	20.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	16.3	15.0
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.3	7.8	7.5





OIL ANALYSIS REPORT

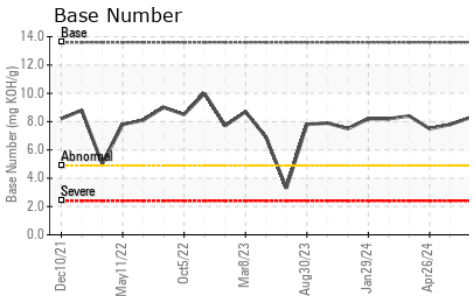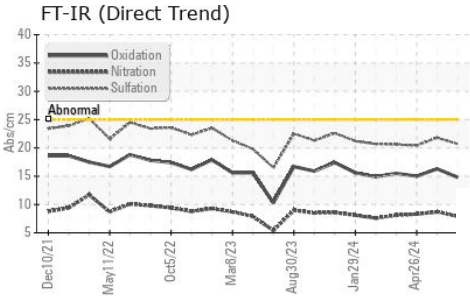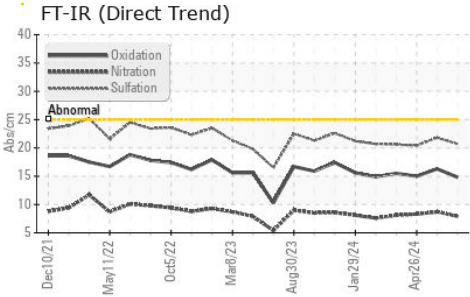

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.4	▲ 12.2	12.5

GRAPHS

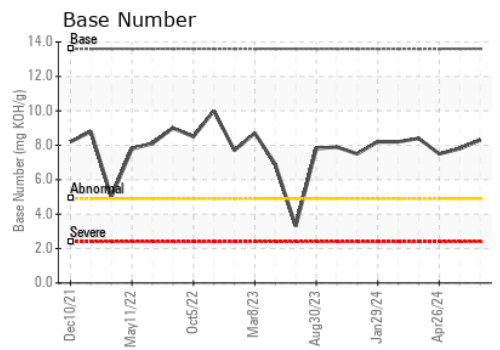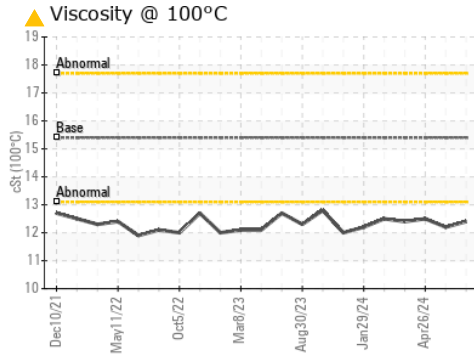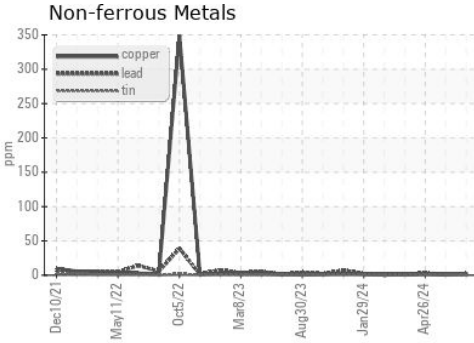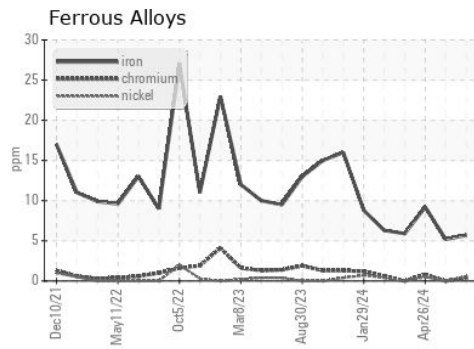

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212028 **Received** : 25 Jun 2024
Lab Number : **06219500** **Tested** : 26 Jun 2024
Unique Number : 11097697 **Diagnosed** : 26 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)