




# OIL ANALYSIS REPORT

Sample Rating Trend

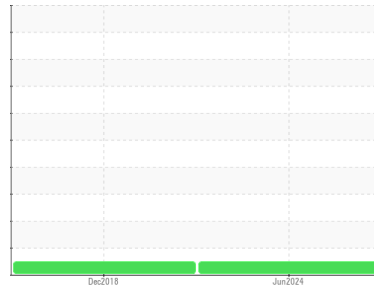

**NORMAL**



Area  
**[W52619 JR CASKEY]**  
 Machine Id  
**HAMM GRW180I H2280193**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0224934</b>	JRMC471099	---
Sample Date	Client Info		<b>21 Jun 2024</b>	14 Dec 2018	---
Machine Age	hrs	Client Info	<b>1215</b>	475	---
Oil Age	hrs	Client Info	<b>0</b>	475	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>35</b>	22	---
Chromium	ppm	ASTM D5185m >20	<b>4</b>	2	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>15</b>	3	---
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	---
Copper	ppm	ASTM D5185m >330	<b>30</b>	19	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	0	---
Antimony	ppm	ASTM D5185m	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>222</b>	152	---
Barium	ppm	ASTM D5185m	<b>3</b>	<1	---
Molybdenum	ppm	ASTM D5185m	<b>291</b>	52	---
Manganese	ppm	ASTM D5185m	<b>2</b>	2	---
Magnesium	ppm	ASTM D5185m	<b>905</b>	442	---
Calcium	ppm	ASTM D5185m	<b>1689</b>	2021	---
Phosphorus	ppm	ASTM D5185m	<b>886</b>	1023	---
Zinc	ppm	ASTM D5185m	<b>1270</b>	1244	---
Sulfur	ppm	ASTM D5185m	<b>3513</b>	3800	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>23</b>	23	---
Sodium	ppm	ASTM D5185m	<b>2</b>	3	---
Potassium	ppm	ASTM D5185m >20	<b>5</b>	4	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	5.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	18.3	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	13.3	---
Base Number (BN)	mg KOH/g	ASTM D2896 13.6	<b>8.0</b>	9.1	---





# OIL ANALYSIS REPORT

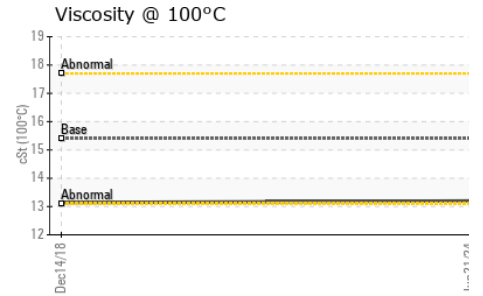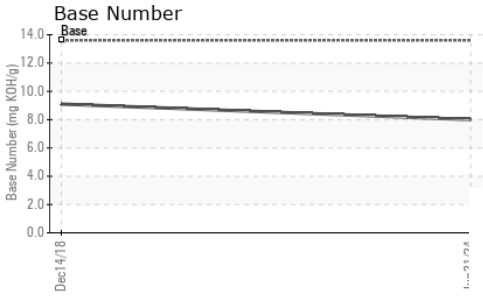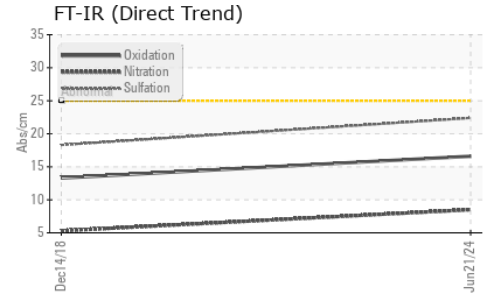

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.14

### GRAPHS

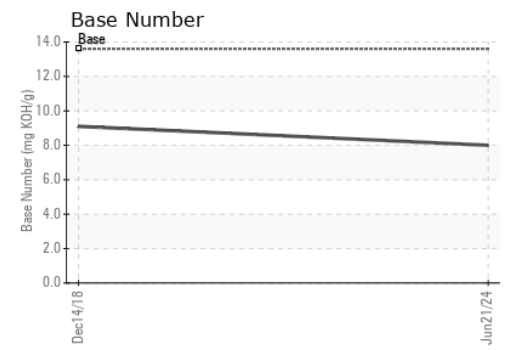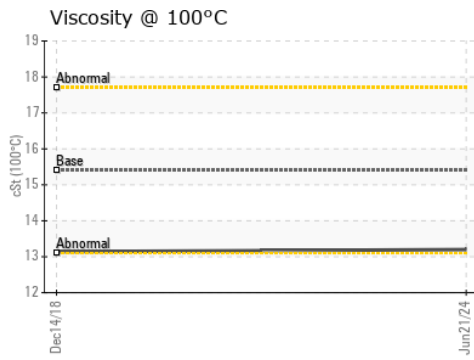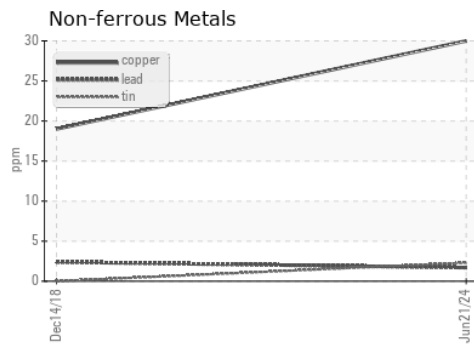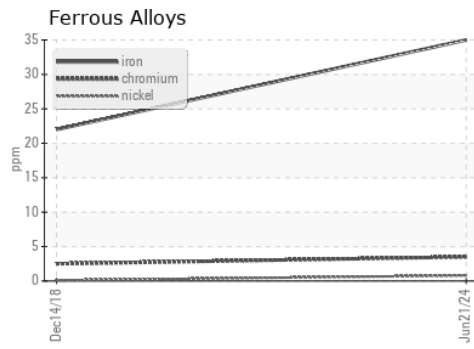

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0224934      **Received** : 25 Jun 2024  
**Lab Number** : 06219501      **Tested** : 26 Jun 2024  
**Unique Number** : 11097698      **Diagnosed** : 26 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)