


OIL ANALYSIS REPORT

Area [23361] 80-249

Hydraulic System

ConocoPhillips power Tran (--- GAL)





Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: ConocoPhillips power Tran oil)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Jun 2074 | | |
|---|--|---|--|---|------------------------------|------------------------------|
| | | | | Jun2024 | | |
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0940745 | | |
| Sample Date | | Client Info | | 17 Jun 2024 | | |
| Machine Age | hrs | Client Info | | 1623 | | |
| Oil Age | hrs | Client Info | | 523 | | |
| Oil Changed | 1110 | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | nnm | ASTM D5185m | >20 | 0 | | |
| Chromium | ppm | | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | 710 | 0 | | |
| Silver | | ASTM D5105m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 1 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper | ppm | ASTM D5185m | | 2 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | >10 | 0 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| Cadmidin | ppm | AO INI DO IOSIII | | <u> </u> | | |
| ADDITIVES | | method | limit/base | | | history2 |
| 788111120 | | memod | III III Dasc | Current | history1 | Thistory |
| Boron | ppm | ASTM D5185m | mm base | 111 | | |
| | ppm ppm | | iiiiii base | | • | , |
| Boron | • • | ASTM D5185m | iiiiii basc | 111 | | |
| Boron Barium | ppm | ASTM D5185m ASTM D5185m | iiiiii basc | 111 0 | | |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | mma sass | 111 0 <1 | | |
| Boron Barium Molybdenum Manganese | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | | 111 0 <1 0 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | | 111 0 <1 0 25 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | | 111 0 <1 0 25 3503 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | | 111 0 <1 0 25 3503 1127 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 111 0 <1 0 25 3503 1127 1381 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 111 0 <1 0 25 3503 1127 1381 6990 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 111 0 <1 0 25 3503 1127 1381 6990 current | | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >20 | 111 0 <1 0 25 3503 1127 1381 6990 current | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >20 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >20 >20 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | limit/base >20 >20 limit/base | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | limit/base >20 >20 limit/base >5000 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | limit/base >20 >20 limit/base >5000 >1300 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 253 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 | limit/base >20 >20 limit/base >5000 >1300 >160 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 253 18 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >20 >20 limit/base >5000 >1300 >160 >40 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 253 18 5 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >20 >20 limit/base >5000 >1300 >160 >40 >10 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 253 18 5 0 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >5µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | limit/base >20 >20 limit/base >5000 >1300 >160 >40 >10 >3 | 111 0 <1 0 25 3503 1127 1381 6990 current 15 7 <1 current 4936 253 18 5 0 0 | history1 history1 | history2 history2 |

0.96



OIL ANALYSIS REPORT

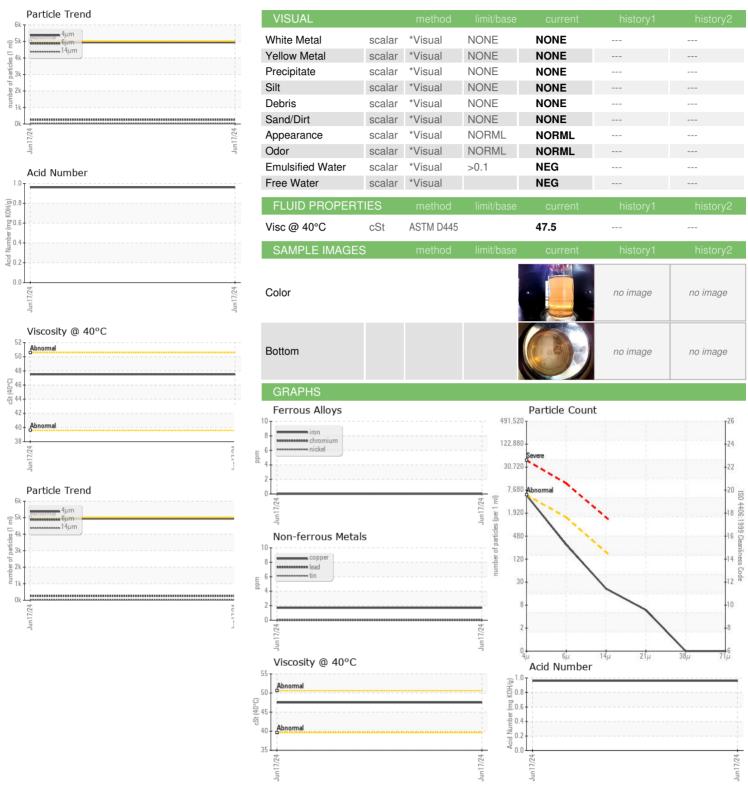





Certificate 12367

Laboratory Sample No.

Lab Number : 06219625 Unique Number : 11097822

: WC0940745 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Jun 2024 **Tested** : 26 Jun 2024

Diagnosed

: 26 Jun 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

kevin.marson@wearcheck.com T: (918)728-5749

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: JAMES STEELMON

MANHATTAN ROAD AND BRIDGE

5601 S 122ND E AVE

Contact: BEN CALDWELL

TULSA, OK

US 74146