



# PROBLEM SUMMARY

Sample Rating Trend



ISO



Machine Id

**HUBBELL (S/N 2136)**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend



## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	---	---
Particles >4µm	ASTM D7647	>2500	▲ 108868	---	---
Particles >6µm	ASTM D7647	>320	▲ 53103	---	---
Particles >14µm	ASTM D7647	>40	▲ 3592	---	---
Particles >21µm	ASTM D7647	>10	▲ 538	---	---
Particles >38µm	ASTM D7647	>3	▲ 8	---	---
Oil Cleanliness	ISO 4406 (c)	>18/15/12	▲ 24/23/19	---	---

Customer Id: NEFSAI  
Sample No.: WC0942403  
Lab Number: 06219637  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

**RECOMMENDED ACTIONS**

<b>Action</b>	<b>Status</b>	<b>Date</b>	<b>Done By</b>	<b>Description</b>
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

**HISTORICAL DIAGNOSIS**



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id

## HUBBELL (S/N 2136)

Component

### Hydraulic System

Fluid

### AW HYDRAULIC OIL ISO 46 (--- GAL)

#### DIAGNOSIS

##### ▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

##### Wear

All component wear rates are normal.

##### ▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

##### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0942403</b>	---	---
Sample Date	Client Info			<b>20 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	5	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	25	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	200	<b>58</b>	---	---
Phosphorus	ppm	ASTM D5185m	300	<b>344</b>	---	---
Zinc	ppm	ASTM D5185m	370	<b>432</b>	---	---
Sulfur	ppm	ASTM D5185m	2500	<b>1029</b>	---	---





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<b>▲ 108868</b>	---	---
Particles >6µm		ASTM D7647	>320	<b>▲ 53103</b>	---	---
Particles >14µm		ASTM D7647	>40	<b>▲ 3592</b>	---	---
Particles >21µm		ASTM D7647	>10	<b>▲ 538</b>	---	---
Particles >38µm		ASTM D7647	>3	<b>▲ 8</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>18/15/12	<b>▲ 24/23/19</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.26</b>	---	---



# OIL ANALYSIS REPORT

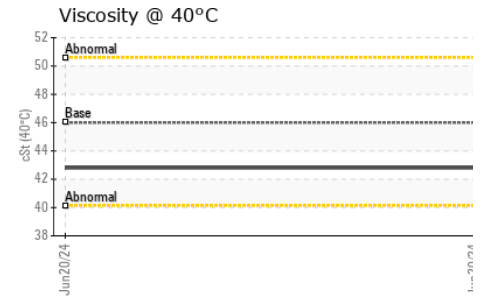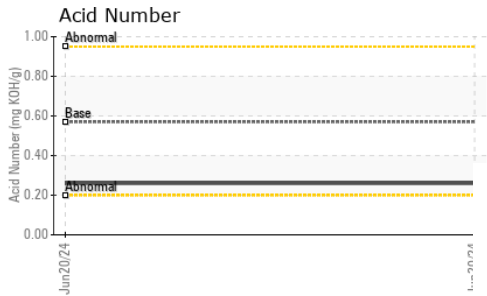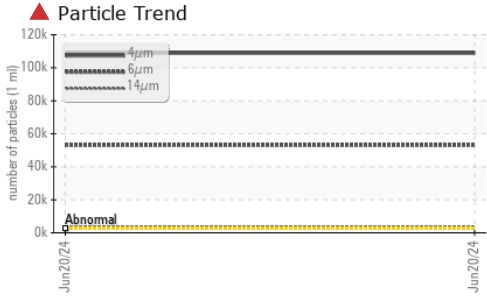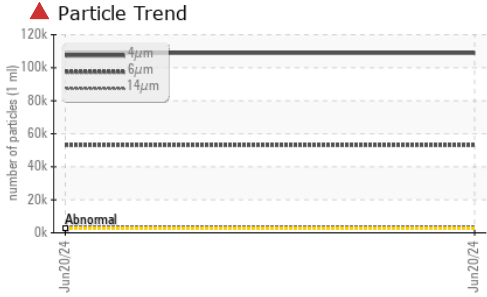



VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	42.8	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

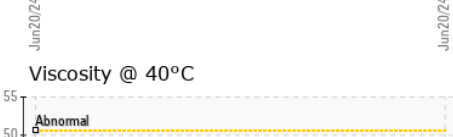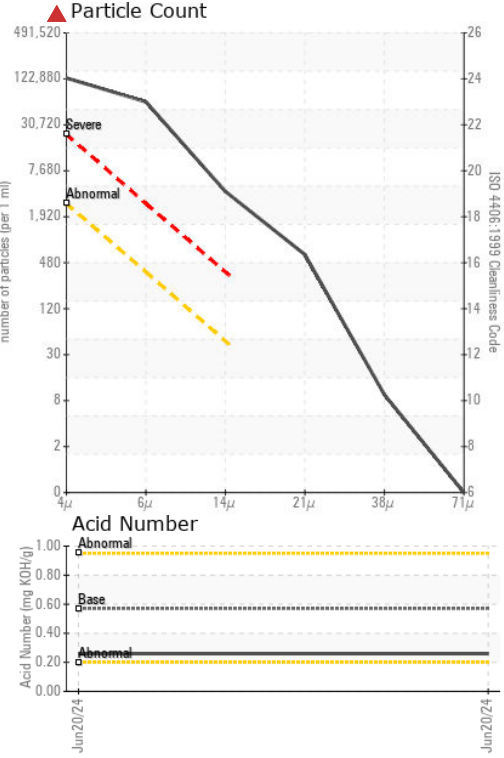

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0942403      **Received** : 25 Jun 2024  
**Lab Number** : 06219637      **Tested** : 26 Jun 2024  
**Unique Number** : 11097834      **Diagnosed** : 26 Jun 2024 - Wes Davis  
**Test Package** : IND 2

**NEFF PRESS INC.**  
 6510 PAGE AVE  
 ST. LOUIS, MO  
 US 63133  
 Contact: JON SCHMIDT  
 jschmidt@neffpress.com  
 T: (314)288-6860  
 F: (314)725-2230

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)