




# OIL ANALYSIS REPORT

Sample Rating Trend

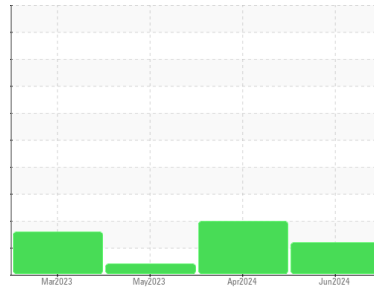

ISO



Machine Id

**8494421 (S/N 1035)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCP27173</b>	KCP27881	KC112210
Sample Date	Client Info			<b>18 Jun 2024</b>	24 Apr 2024	09 May 2023
Machine Age	hrs	Client Info		<b>9990</b>	8856	3351
Oil Age	hrs	Client Info		<b>1500</b>	2500	3351
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>ATTENTION</b>	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	2
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	1
Copper	ppm	ASTM D5185m	>50	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>92</b>	86	72
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	90	<b>85</b>	83	93
Calcium	ppm	ASTM D5185m	2	<b>2</b>	2	4
Phosphorus	ppm	ASTM D5185m		<b>7</b>	15	2
Zinc	ppm	ASTM D5185m		<b>0</b>	2	0
Sulfur	ppm	ASTM D5185m		<b>19309</b>	18753	20426

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	2
Sodium	ppm	ASTM D5185m		<b>24</b>	20	14
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	4
Water	%	ASTM D6304	>0.05	<b>0.019</b>	0.014	0.030
ppm Water	ppm	ASTM D6304	>500	<b>196</b>	145	308.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>5181</b>	17560	---
Particles >6µm		ASTM D7647	>1300	<b>1832</b>	5493	---
Particles >14µm		ASTM D7647	>80	<b>83</b>	382	---
Particles >21µm		ASTM D7647	>20	<b>10</b>	113	---
Particles >38µm		ASTM D7647	>4	<b>1</b>	10	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	1	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>20/18/14</b>	21/20/16	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.35</b>	0.33	0.38


# OIL ANALYSIS REPORT

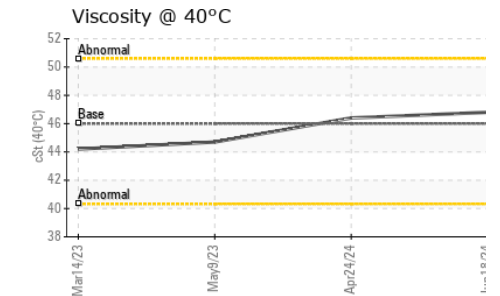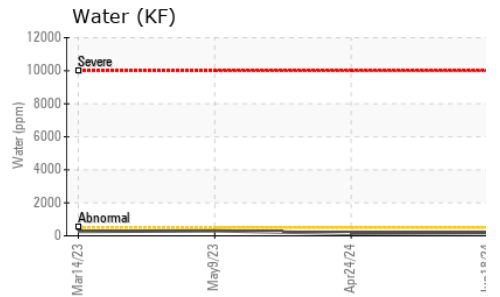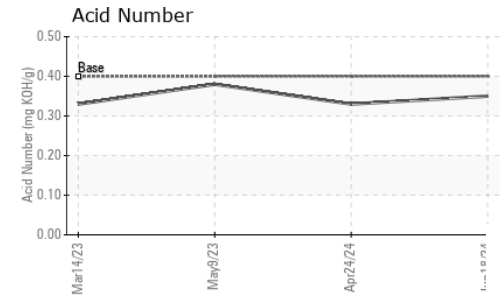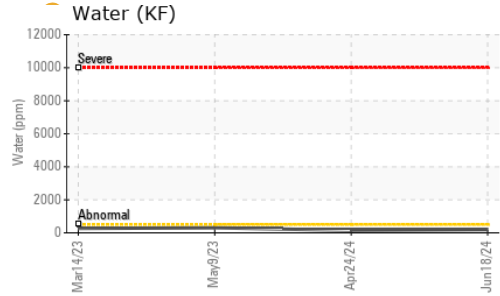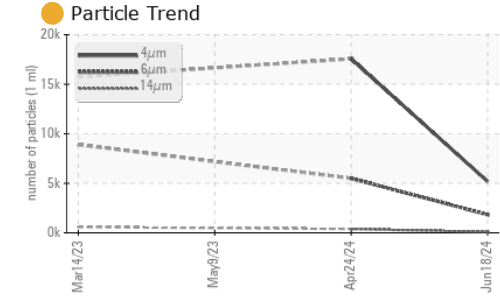

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.8	46.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

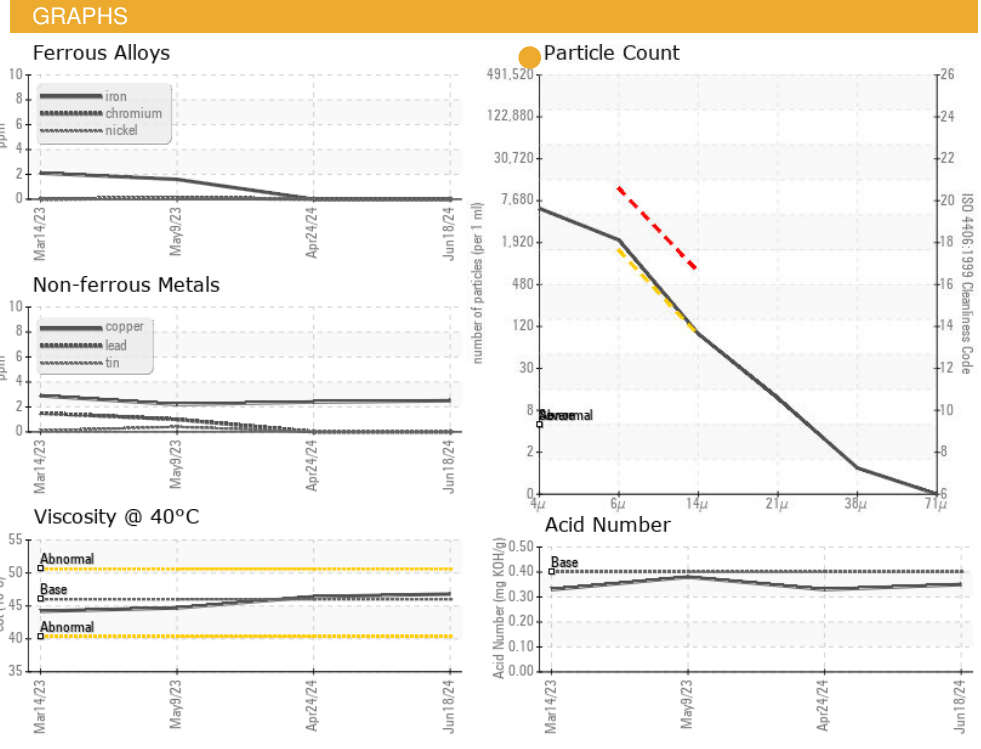

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCP27173  
**Lab Number** : 06219721  
**Unique Number** : 11097918  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )  
**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 26 Jun 2024 - Don Baldrige

**D & W FINE PACK**  
 1372 N OLD LAURENS RD  
 FOUNTAIN INN, SC  
 US 29644  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)