




OIL ANALYSIS REPORT

Sample Rating Trend

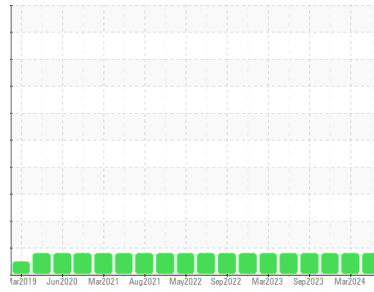

WEAR



Machine Id
IAC-1B
 Component
Compressor
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The lead level is abnormal. All other component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RP0043293	RP0039487	RP0038802
Sample Date	Client Info	24 Jun 2024	13 Mar 2024	10 Dec 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	0	0	
Chromium	ppm	ASTM D5185m >10	<1	0	
Nickel	ppm	ASTM D5185m	<1	0	
Titanium	ppm	ASTM D5185m	<1	0	
Silver	ppm	ASTM D5185m	0	0	
Aluminum	ppm	ASTM D5185m >25	<1	<1	
Lead	ppm	ASTM D5185m >25	▲ 43	▲ 41	▲ 39
Copper	ppm	ASTM D5185m >50	1	<1	
Tin	ppm	ASTM D5185m >15	0	0	
Vanadium	ppm	ASTM D5185m	0	0	
Cadmium	ppm	ASTM D5185m	<1	0	

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	
Barium	ppm	ASTM D5185m	0	0	
Molybdenum	ppm	ASTM D5185m	<1	0	
Manganese	ppm	ASTM D5185m	<1	0	
Magnesium	ppm	ASTM D5185m	0	<1	
Calcium	ppm	ASTM D5185m	<1	4	
Phosphorus	ppm	ASTM D5185m	501	476	476
Zinc	ppm	ASTM D5185m	18	14	9

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	2	0	0
Sodium	ppm	ASTM D5185m	2	0	0
Potassium	ppm	ASTM D5185m >20	1	<1	<1
Water	%	ASTM D6304 >0.1	0.001	0.002	0.006
ppm Water	ppm	ASTM D6304 >1000	14	22	62





FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.30	0.27	0.28

VISUAL


method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

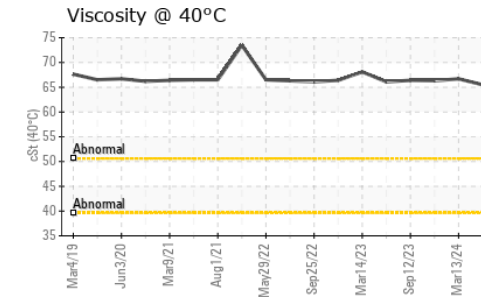
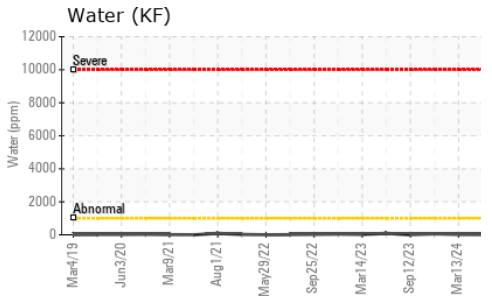
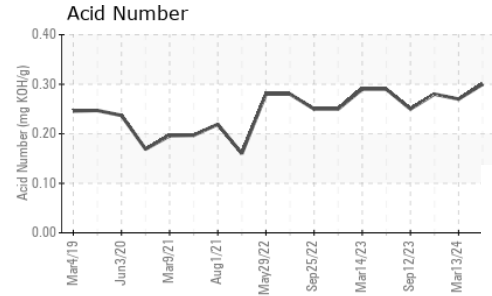
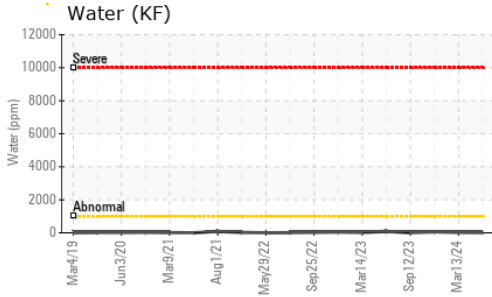


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		65.5	66.7	66.3

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

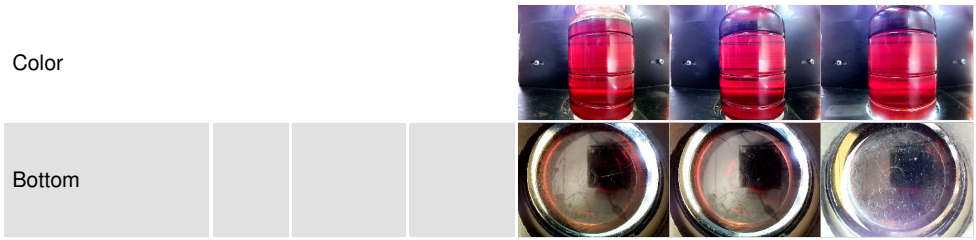

GRAPHS

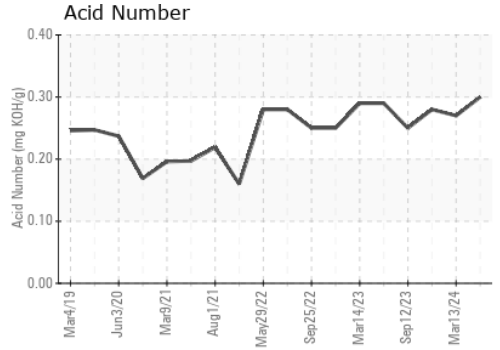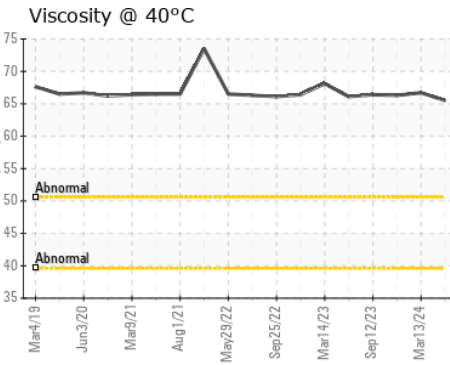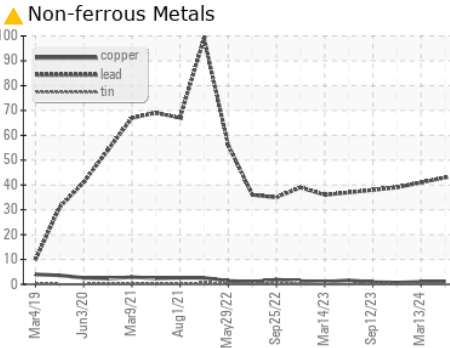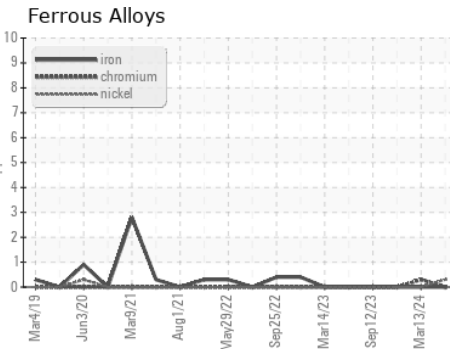

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0043293
Lab Number : 06219770
Unique Number : 11097967
Test Package : IND 2
Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Don Baldrige

ENGIE-MATEP
 474 BROOKLINE AVE
 BOSTON, MA
 US 02215
 Contact: ROBERT ST SAUVEUR
 robert.stsauveur@engie.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (401)651-9381
 F: