




OIL ANALYSIS REPORT

Sample Rating Trend

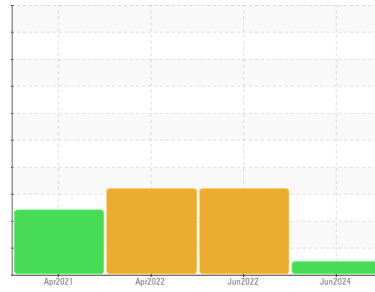

NORMAL



Machine Id
E-156
 Component
Left Final Drive
 Fluid
PHILLIPS 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0900336	WC0663516	WC0663491
Sample Date	Client Info			19 Jun 2024	13 Jun 2022	22 Apr 2022
Machine Age	hrs	Client Info		8547	5667	5353
Oil Age	hrs	Client Info		559	1232	918
Oil Changed	Client Info			Changed	Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	221	▲ 537	283
Chromium	ppm	ASTM D5185m	>10	<1	4	2
Nickel	ppm	ASTM D5185m	>10	0	1	<1
Titanium	ppm	ASTM D5185m		<1	2	2
Silver	ppm	ASTM D5185m		0	1	<1
Aluminum	ppm	ASTM D5185m	>25	6	● 30	● 30
Lead	ppm	ASTM D5185m	>25	0	<1	0
Copper	ppm	ASTM D5185m	>50	<1	2	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	<1


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		11	10	5
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	2	1
Manganese	ppm	ASTM D5185m		<1	4	2
Magnesium	ppm	ASTM D5185m		5	15	10
Calcium	ppm	ASTM D5185m		67	2380	2506
Phosphorus	ppm	ASTM D5185m		427	859	925
Zinc	ppm	ASTM D5185m		80	1011	1049
Sulfur	ppm	ASTM D5185m		14796	7320	6460

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	41	▲ 154	▲ 131
Sodium	ppm	ASTM D5185m		1	2	2
Potassium	ppm	ASTM D5185m	>20	3	3	3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	NONE	▲ HEAVY
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT

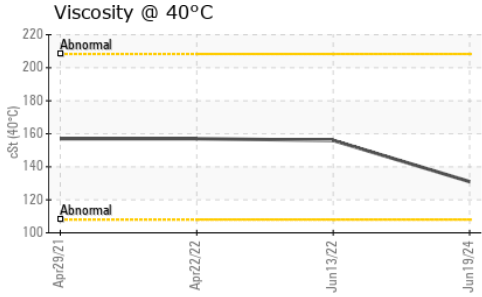




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	131	156	157

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

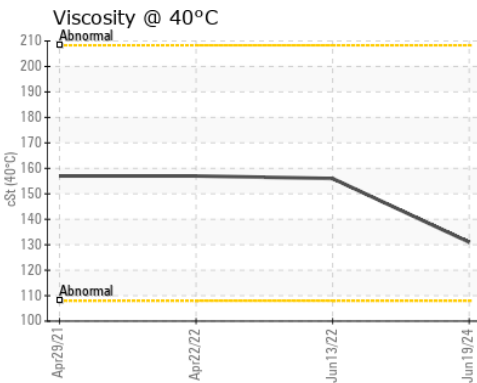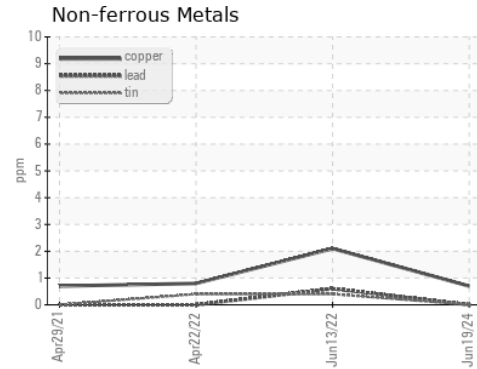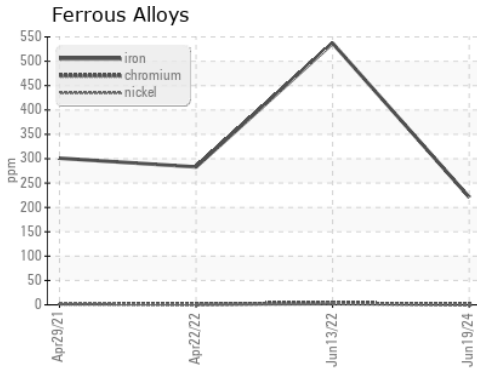

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900336
Lab Number : **06220101**
Unique Number : 11098298
Test Package : CONST

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

DUKE LAZZARA
 4201 FAYETTEVILLE RD
 RALEIGH, NC
 US 27603

Contact: BRANDON BYRUM
 b.byrum@dukellazzara.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: