

OIL ANALYSIS REPORT

Machine Id

KAESER BSD-60 2878141 (

Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

S/N 1114)						Λ
5/11 114)		eb2008 Mar20	109 Nov2010 Nov2015 Ju	12017 Nov2018 Jun2020 Mey2021	Mey2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018591	KCP53738	KCP48682
Sample Date		Client Info		20 Jun 2024	12 May 2023	20 Jan 2022
Machine Age	hrs	Client Info		73542	69316	62978
Dil Age	hrs	Client Info		4225	2500	2651
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
_ead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	6	3	5
Fin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				0
/anadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	6	33
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	22	62	54
Calcium	ppm	ASTM D5185m	2	0	2	0
Phosphorus	ppm	ASTM D5185m		2	<1	2
Zinc	ppm	ASTM D5185m		7	0	7
Sulfur	ppm	ASTM D5185m		20360	24402	17662
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		10	16	7
Potassium	ppm	ASTM D5185m	>20	3	6	<1
Nater	%	ASTM D6304	>0.05	0.016	0.024	0.013
opm Water	ppm	ASTM D6304	>500	165	249.2	132.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		7415	51279	
Particles >6µm		ASTM D7647	>1300	<u> </u>	12208	
Particles >14µm		ASTM D7647	>80	A 344	A 856	
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 83	1 217	
Particles >38µm		ASTM D7647	>4	4	6	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 20/19/16	🔺 23/21/17	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2

Sample Rating Trend


ISO


Report Id: BUZKNO [WUSCAR] 06220374 (Generated: 06/27/2024 13:27:06) Rev: 1


0.37 0.35 Contact/Location: JEREMY SEALS - BUZKNO




OIL ANALYSIS REPORT

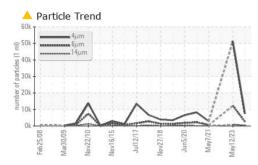

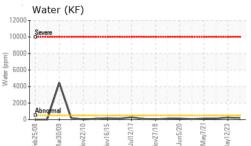


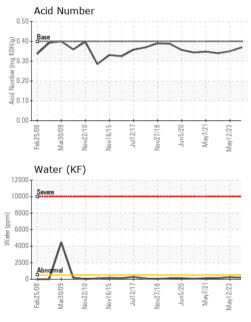



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.2	44.2	44.5
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Dettern					(

Bottom

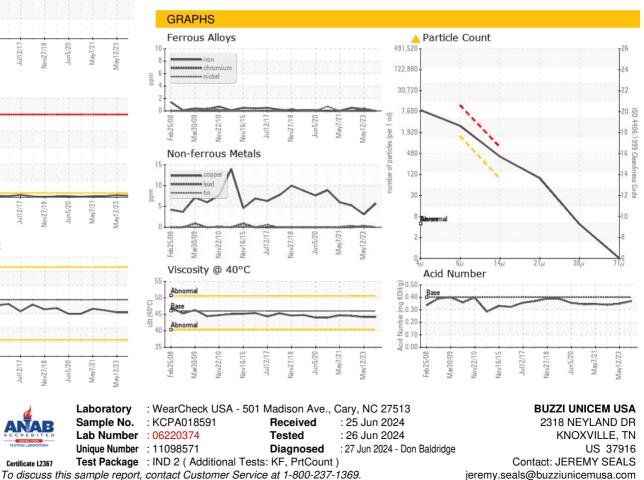

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: BUZKNO [WUSCAR] 06220374 (Generated: 06/27/2024 13:27:06) Rev: 1

Certificate 12367

Contact/Location: JEREMY SEALS - BUZKNO

Page 2 of 2

T:

F: