




OIL ANALYSIS REPORT

Sample Rating Trend

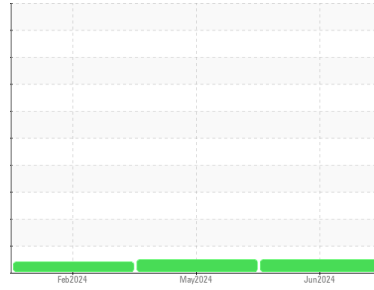

NORMAL



Machine Id
KENWORTH T880 5740 (S/N 1XKZDP9X4J361019)
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T4 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0917304	WC0878951	WC0878964
Sample Date	Client Info			19 Jun 2024	03 May 2024	29 Feb 2024
Machine Age	mls	Client Info		36289	29284	18184
Oil Age	mls	Client Info		0	0	12000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	0.4
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	9	22	49
Chromium	ppm	ASTM D5185m	>20	0	<1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	5	11	28
Lead	ppm	ASTM D5185m	>40	0	0	3
Copper	ppm	ASTM D5185m	>330	2	5	10
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		11	10	22
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		17	20	9
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m		199	286	807
Calcium	ppm	ASTM D5185m		2236	1982	1349
Phosphorus	ppm	ASTM D5185m		970	971	787
Zinc	ppm	ASTM D5185m		1190	1148	887
Sulfur	ppm	ASTM D5185m		4202	3734	3125

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	10	18
Sodium	ppm	ASTM D5185m		1	2	4
Potassium	ppm	ASTM D5185m	>20	15	33	89


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.1	9.1	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.0	21.4	23.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.4	14.9	19.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	6.7	5.7	4.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

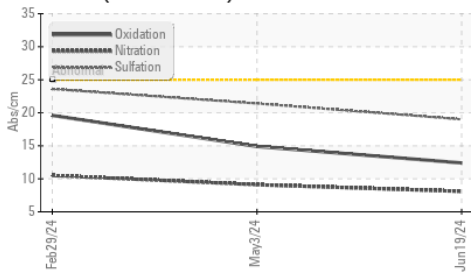

Base Number

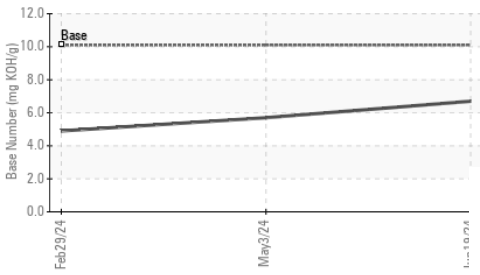

Viscosity @ 100°C

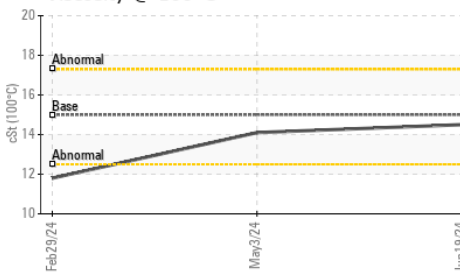


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15	14.5	14.1	11.8

GRAPHS


Iron (ppm)

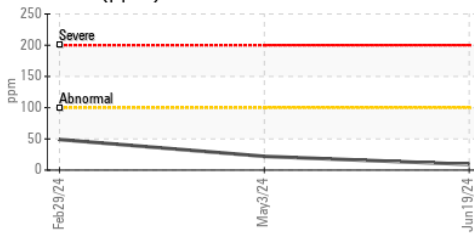


Lead (ppm)

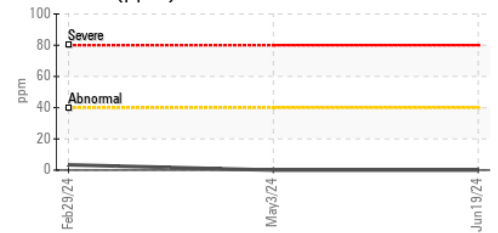


Aluminum (ppm)

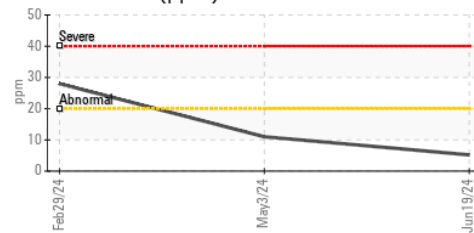


Chromium (ppm)

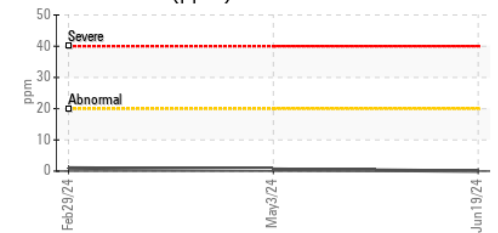


Copper (ppm)

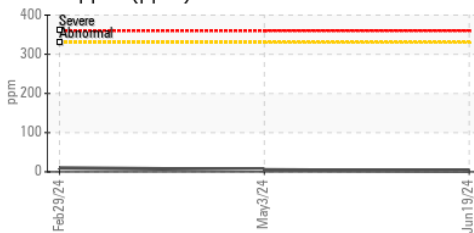


Silicon (ppm)

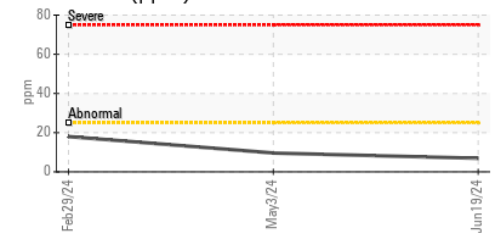

Viscosity @ 100°C

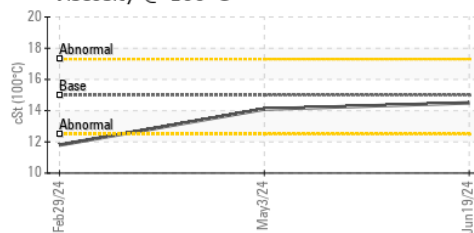

Base Number

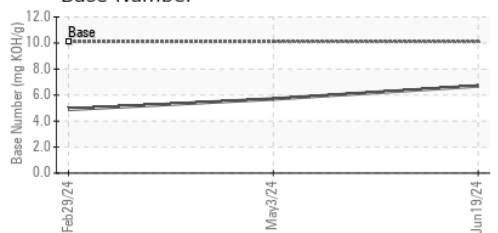

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0917304

Lab Number : 06220498

Unique Number : 11098695

Test Package : MOB 1 (Additional Tests: TBN)

Received : 25 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Wes Davis

JOHNSON BREEDERS

3425 HWY 117N

ROSE HILL, NC

US 28458

Contact: GREG JONES

gregory.jones@houseofraeford.com

T: (910)289-6884

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)