



FUEL REPORT

Sample Rating Trend



NORMAL



Machine Id
KIOTI RX6620 UW4800024

Component
Diesel Fuel

Fluid
No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KT0001589	---	---
Sample Date	Client Info			25 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Sample Status				NORMAL	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	0.835	---	---
Fuel Color	text	*Visual Screen	Yellow	Orang	---	---
ASTM Color	scalar	*ASTM D1500		L3.5	---	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	70.5	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0	---	---
Sulfur (UVF)	ppm	ASTM D5453		5	---	---






DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	184	---	---
5% Distillation Point	°C	ASTM D86		209	---	---
10% Distill Point	°C	ASTM D86	201	218	---	---
15% Distillation Point	°C	ASTM D86		226	---	---
20% Distill Point	°C	ASTM D86	216	232	---	---
30% Distill Point	°C	ASTM D86	230	243	---	---
40% Distill Point	°C	ASTM D86	243	256	---	---
50% Distill Point	°C	ASTM D86	255	268	---	---
60% Distill Point	°C	ASTM D86	267	282	---	---
70% Distill Point	°C	ASTM D86	280	296	---	---
80% Distill Point	°C	ASTM D86	295	309	---	---
85% Distillation Point	°C	ASTM D86		318	---	---
90% Distill Point	°C	ASTM D86	310	328	---	---
95% Distillation Point	°C	ASTM D86		344	---	---
Final Boiling Point	°C	ASTM D86	341	354	---	---
Distillation Residue	%	ASTM D86	3.0	1.4	---	---
Distillation Loss	%	ASTM D86	3.0	0.8	---	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	38.0	---	---
Cetane Index		ASTM D4737	<40.0	53.3	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1	---	---
Sodium	ppm	ASTM D5185m	<0.1	<1	---	---
Potassium	ppm	ASTM D5185m	<0.1	0	---	---
Water	%	ASTM D6304	<0.05	0.003	---	---
ppm Water	ppm	ASTM D6304	<500	36	---	---
% Gasoline	%	*In-House	<0.50	0.0	---	---
% Biodiesel	%	*In-House	<20.0	5.3	---	---



FUEL REPORT

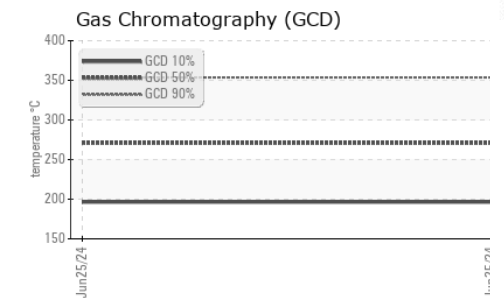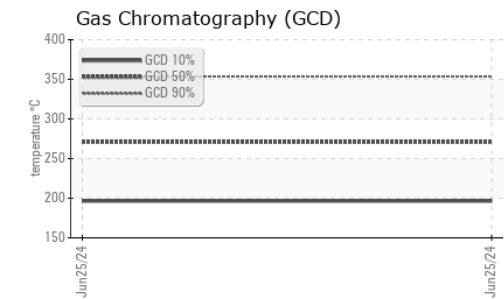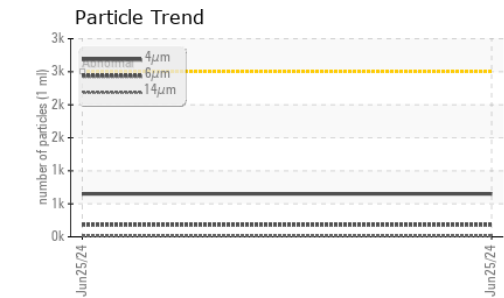
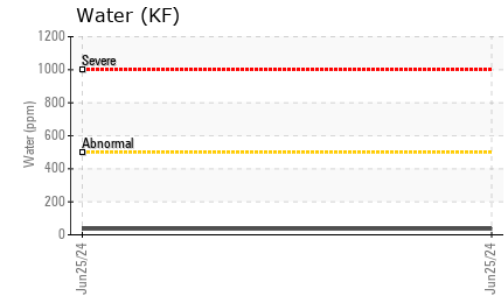
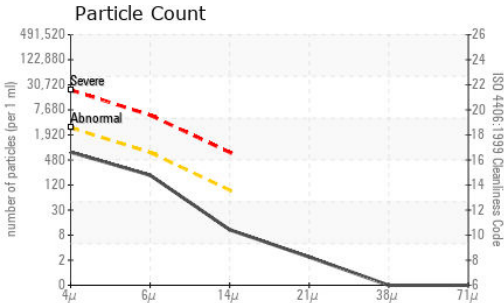


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	650	---	---
Particles >6µm	ASTM D7647	>640	182	---	---
Particles >14µm	ASTM D7647	>80	9	---	---
Particles >21µm	ASTM D7647	>20	2	---	---
Particles >38µm	ASTM D7647	>4	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	17/15/10	---	---

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	---	---
Nickel	ppm	ASTM D5185m <0.1	0	---	---
Lead	ppm	ASTM D5185m <0.1	0	---	---
Vanadium	ppm	ASTM D5185m <0.1	0	---	---
Iron	ppm	ASTM D5185m <0.1	0	---	---
Calcium	ppm	ASTM D5185m <0.1	0	---	---
Magnesium	ppm	ASTM D5185m <0.1	0	---	---
Phosphorus	ppm	ASTM D5185m <0.1	<1	---	---
Zinc	ppm	ASTM D5185m <0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

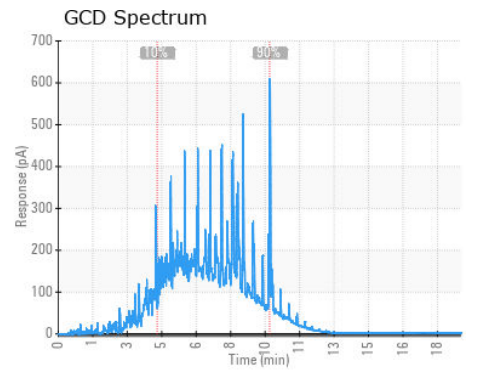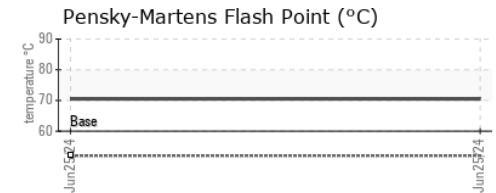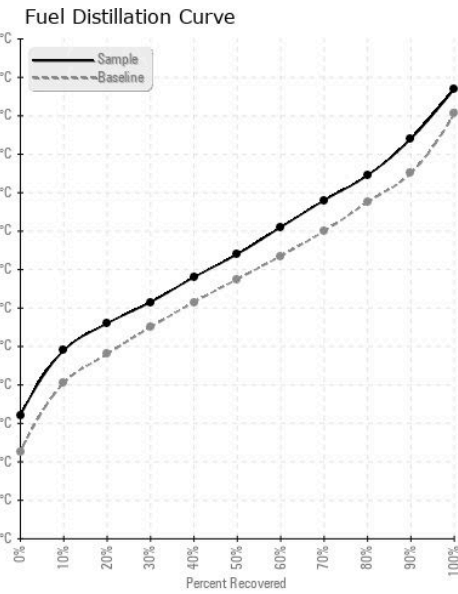

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0001589 **Received** : 25 Jun 2024
Lab Number : **06220592** **Tested** : 02 Jul 2024
Unique Number : 11098789 **Diagnosed** : 02 Jul 2024 - Doug Bogart
Test Package : DF-2 (Additional Tests: Fuel, Screen)

SAN JOAQUIN TRACTOR
 1201 S UNION AVE
 BAKERSFIELD, CA
 US 93305
 Contact: FRED Jauch
 fred@sanjoaquintractor.com
 T: (661)324-4517
 F: (661)324-2306

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)