




OIL ANALYSIS REPORT

Sample Rating Trend

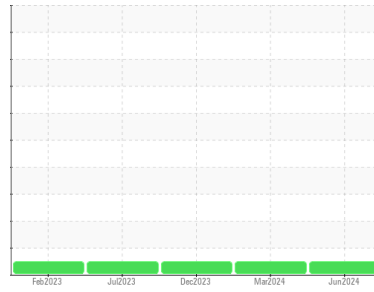

NORMAL



Area
(Vin)
 Machine Id
91110
 Component
Front Diesel Engine
 Fluid
PETRO CANADA 10W30 (40 QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-----------------|--------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | SBP0007208 | SBP0005652 | SBP0005607 |
| Sample Date | Client Info | | | 04 Jun 2024 | 29 Mar 2024 | 08 Dec 2023 |
| Machine Age | mls Client Info | | | 252286 | 82363 | 62086 |
| Oil Age | mls Client Info | | | 169923 | 20000 | 20000 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >80 | 44 | 25 | 29 |
| Chromium | ppm | ASTM D5185m | >5 | <1 | 2 | 3 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >30 | 4 | 10 | 22 |
| Lead | ppm | ASTM D5185m | >30 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >150 | 2 | 68 | 97 |
| Tin | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 3 | 0 | <1 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 62 | 62 | 59 |
| Manganese | ppm | ASTM D5185m | | 1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | | 1006 | 1050 | 982 |
| Calcium | ppm | ASTM D5185m | | 1165 | 1216 | 1121 |
| Phosphorus | ppm | ASTM D5185m | | 1075 | 1042 | 985 |
| Zinc | ppm | ASTM D5185m | | 1355 | 1283 | 1242 |
| Sulfur | ppm | ASTM D5185m | | 3400 | 2957 | 2360 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >20 | 5 | 4 | 5 |
| Sodium | ppm | ASTM D5185m | | 2 | 2 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 18 | 53 |


| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.4 | 0.5 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 13.3 | 8.5 | 8.4 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 29.1 | 20.4 | 20.5 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 32.7 | 17.1 | 16.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 4.7 | 7.3 | 7.6 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

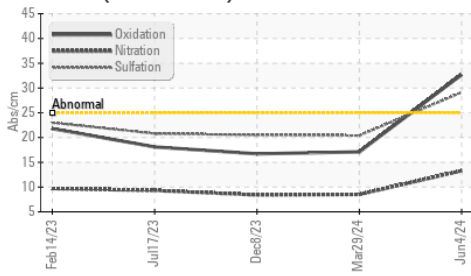

Base Number

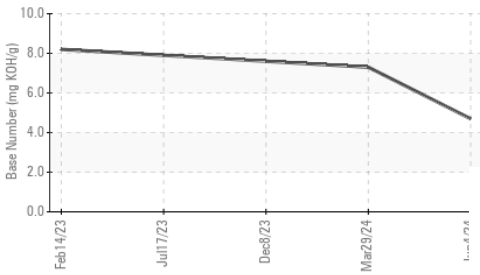

Viscosity @ 100°C

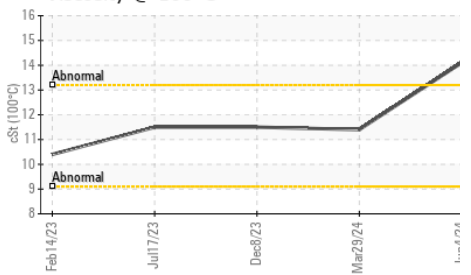


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 14.1 | 11.4 | 11.5 |

GRAPHS


Ferrous Alloys

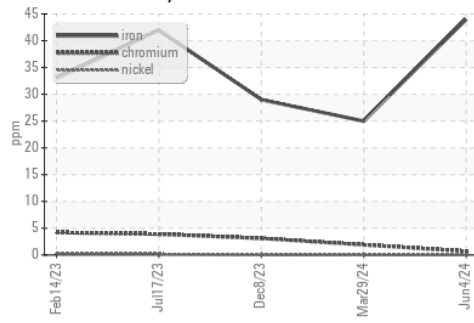


Non-ferrous Metals

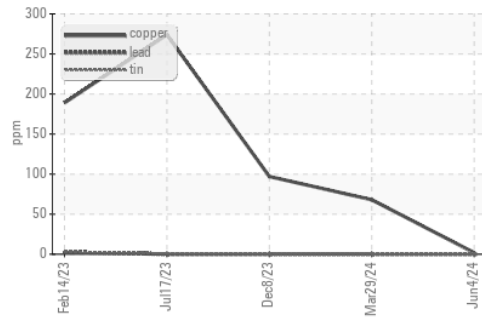

Viscosity @ 100°C

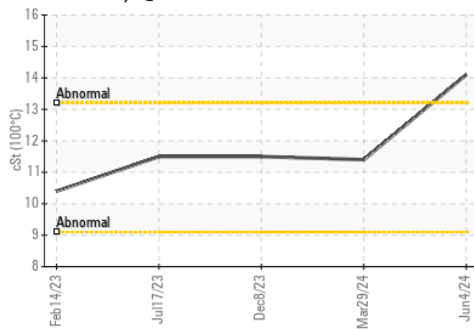

Base Number

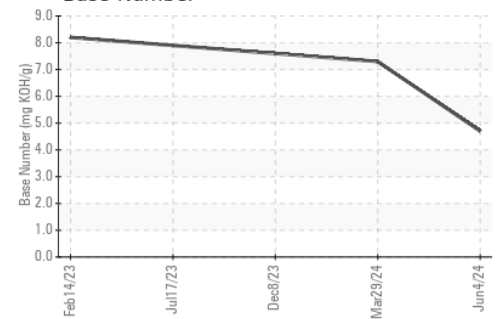

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007208
Lab Number : 06220683
Unique Number : 11098880
Test Package : FLEET
Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 27 Jun 2024 - Angela Borella

Sapp Bros. Fleet - West Point Location
 660 S Main St.
 West Point, NE
 US 68788
 Contact: DOUG EDWARDS
 dedwards@sappbros.net
 T: (402)342-5485
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)