


PROBLEM SUMMARY

Sample Rating Trend



DIRT

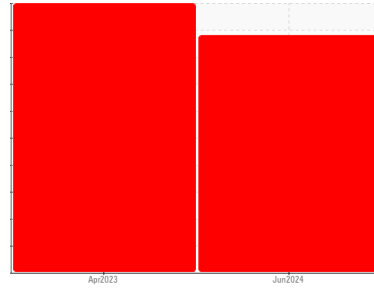

Area

[TREX]

Machine Id

JOHN DEERE 318G 1T0318GALMJ395231


Component

Diesel Engine

Fluid

{not provided} (--- GAL)

COMPONENT CONDITION SUMMARY

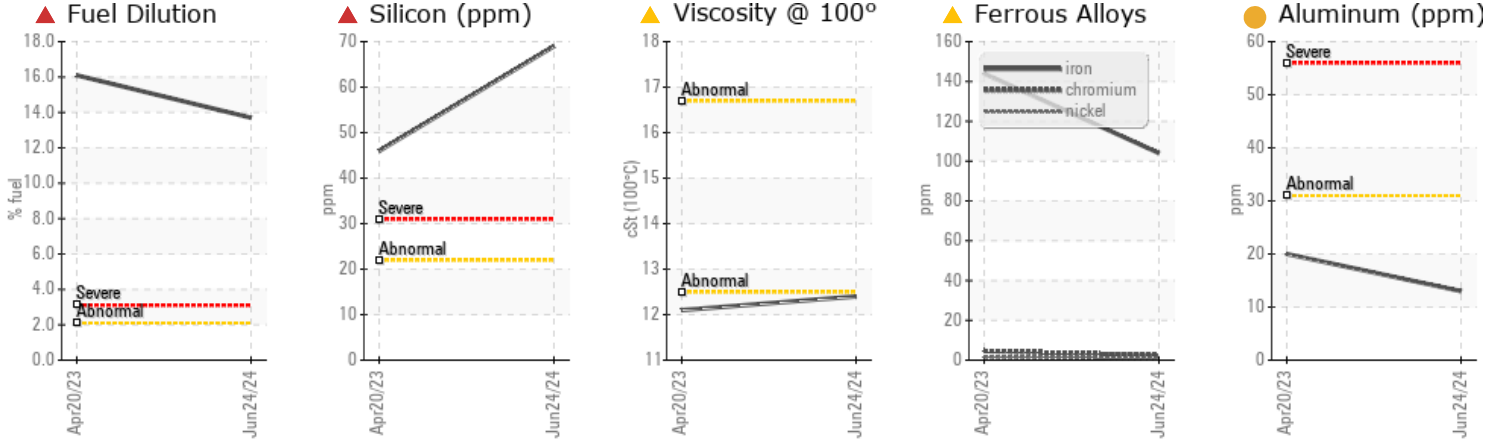

RECOMMENDATION

We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	---
Iron	ppm	ASTM D5185m	>51	▲ 104	▲ 144	---
Silicon	ppm	ASTM D5185m	>22	▲ 69	▲ 46	---
Fuel	%	ASTM D3524	>2.1	▲ 13.7	▲ 16.1	---
Visc @ 100°C	cSt	ASTM D445		▲ 12.4	▲ 12.1	---

Customer Id: JAMWIN
 Sample No.: JR0210412
 Lab Number: 06220968
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

DIRT



20 Apr 2023 Diag: Jonathan Hester

We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Cylinder, crank, or cam shaft wear is indicated. Bearing and/or bushing wear is indicated. There is a high amount of fuel present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



OIL ANALYSIS REPORT

Area

[TREX]


Machine Id

JOHN DEERE 318G 1T0318GALMJ395231

Component

Diesel Engine

Fluid

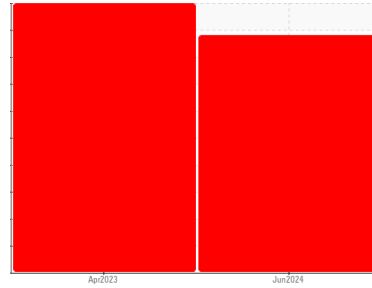{not provided} (--- GAL)
Sample Rating Trend

DIRT

DIAGNOSIS
▲ Recommendation

We advise that you check the fuel injection system. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

▲ Contamination

There is a high amount of fuel present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0210412	JR0159430	---
Sample Date	Client Info			24 Jun 2024	20 Apr 2023	---
Machine Age	hrs	Client Info		2227	1191	---
Oil Age	hrs	Client Info		0	1191	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				SEVERE	SEVERE	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.21	NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	▲ 104	▲ 144	---
Chromium	ppm	ASTM D5185m	>11	2	5	---
Nickel	ppm	ASTM D5185m	>5	1	1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	● 13	● 20	---
Lead	ppm	ASTM D5185m	>26	21	▲ 42	---
Copper	ppm	ASTM D5185m	>26	27	▲ 61	---
Tin	ppm	ASTM D5185m	>4	1	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		113	72	---
Barium	ppm	ASTM D5185m		2	3	---
Molybdenum	ppm	ASTM D5185m		227	183	---
Manganese	ppm	ASTM D5185m		<1	3	---
Magnesium	ppm	ASTM D5185m		680	556	---
Calcium	ppm	ASTM D5185m		1747	1419	---
Phosphorus	ppm	ASTM D5185m		844	701	---
Zinc	ppm	ASTM D5185m		1172	904	---
Sulfur	ppm	ASTM D5185m		3437	3054	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	▲ 69	▲ 46	---
Sodium	ppm	ASTM D5185m	>31	21	11	---
Potassium	ppm	ASTM D5185m	>20	4	0	---
Fuel	%	ASTM D3524	>2.1	▲ 13.7	▲ 16.1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1	1.4	---
Nitration	Abs/cm	*ASTM D7624	>20	16.9	21.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	35.3	39.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	43.1	52.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.7	5.1	---





OIL ANALYSIS REPORT

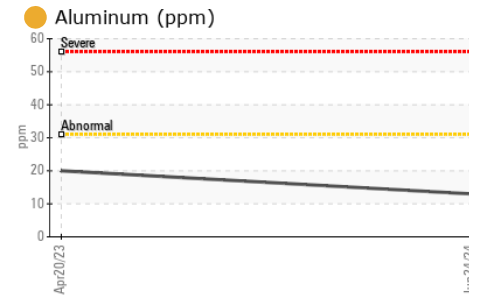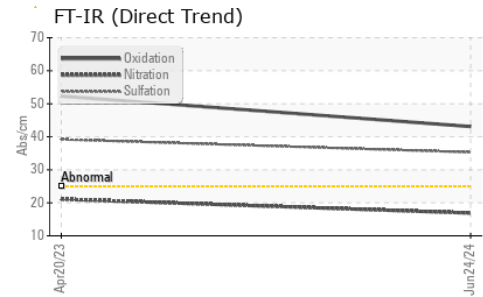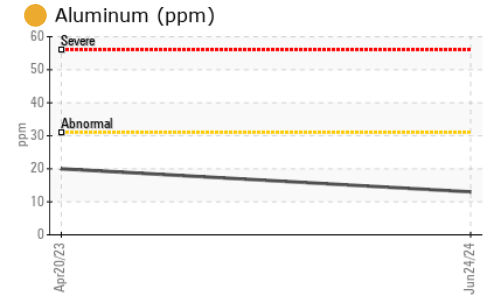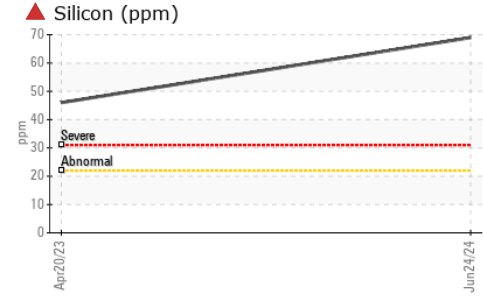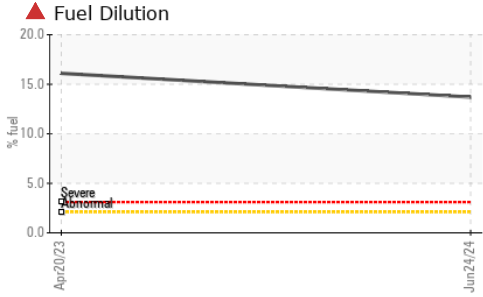

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 12.4	▲ 12.1	---

GRAPHS

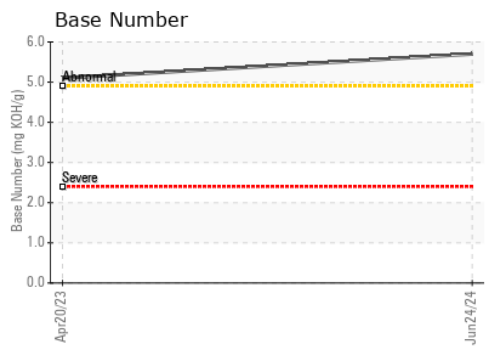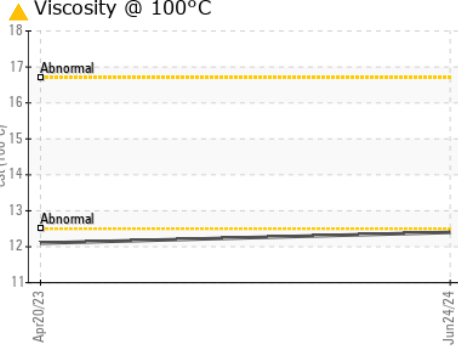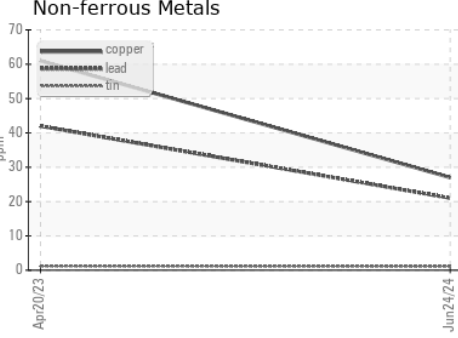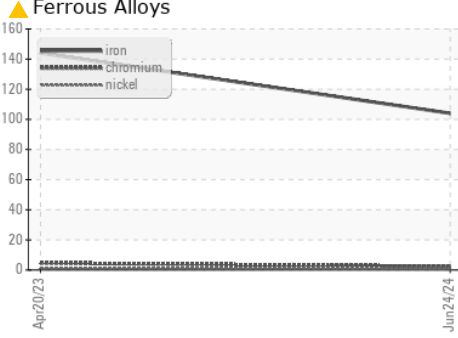

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210412 **Received** : 26 Jun 2024
Lab Number : 06220968 **Tested** : 01 Jul 2024
Unique Number : 11099165 **Diagnosed** : 01 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PercentFuel, TBN)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: BRANDON BROWN
 BRANDON.BROWN@JAMESRIVEREQUIPMENT.COM

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: F: (540)869-0549