




# OIL ANALYSIS REPORT

Sample Rating Trend

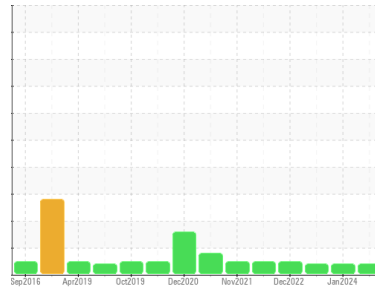

## VISCOSITY



Area  
**[1031433]**  
 Machine Id  
**LCL-10**  
 Component  
**Left Hydraulic System**  
 Fluid  
**CONOCO MEGAFLOW AW 46 (400 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0926844</b>	WC0865373	WC0803168
Sample Date	Client Info		<b>20 Jun 2024</b>	29 Jan 2024	31 May 2023
Machine Age	hrs	Client Info	<b>7238</b>	0	6725
Oil Age	hrs	Client Info	<b>1000</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	N/A
Sample Status			<b>ATTENTION</b>	ATTENTION	ATTENTION

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>1</b>	<1	3
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >75	<b>2</b>	2	2
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>11</b>	12	13
Calcium	ppm	ASTM D5185m	<b>78</b>	37	84
Phosphorus	ppm	ASTM D5185m	<b>358</b>	353	349
Zinc	ppm	ASTM D5185m	<b>442</b>	426	450
Sulfur	ppm	ASTM D5185m	<b>1135</b>	999	1206

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m	<b>2</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	<1

### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1231</b>	---	---
Particles >6µm	ASTM D7647	>1300	<b>383</b>	---	---
Particles >14µm	ASTM D7647	>160	<b>51</b>	---	---
Particles >21µm	ASTM D7647	>40	<b>21</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/16/13</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.38	<b>0.27</b>	---	---





# OIL ANALYSIS REPORT










VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	● 35.7	● 34.1	● 34.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

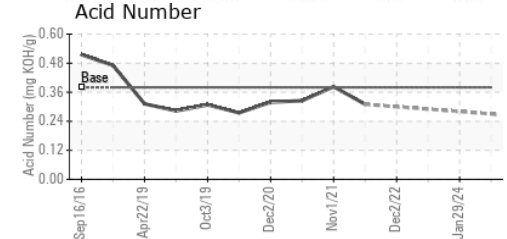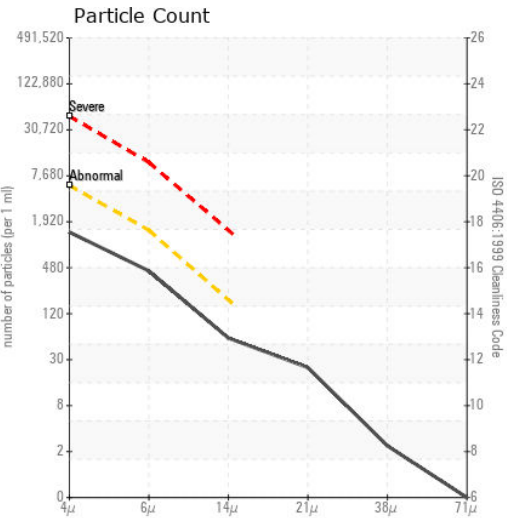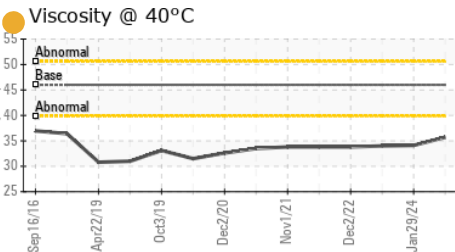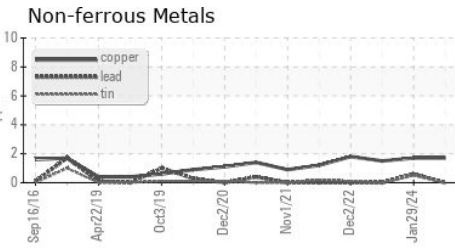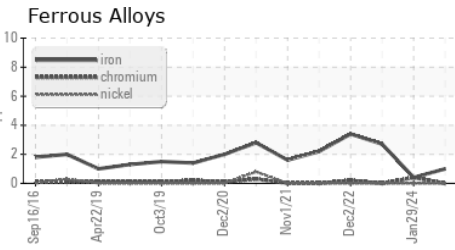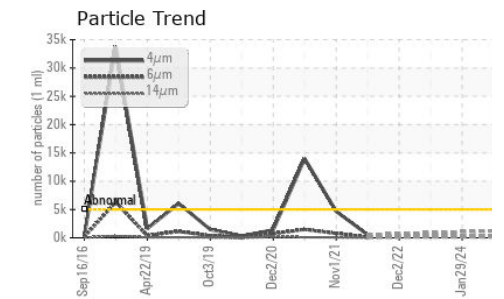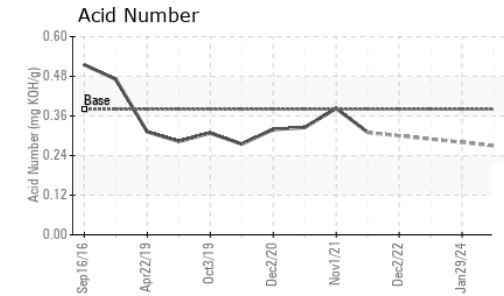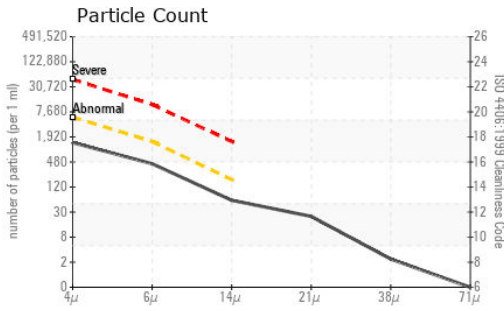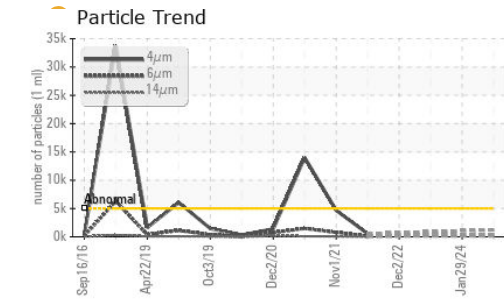

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0926844  
**Lab Number** : 06221153  
**Unique Number** : 11099350  
**Test Package** : MOB 2

**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Don Baldrige

**AES USA - NORTH CHARLESTON**  
 5400 INTERNATIONAL BLVD, BLDG 88-20  
 NORTH CHARLESTON, SC  
 US 29418

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Maxime Banctel  
 maxime.banctel@aes-gse.com

T:  
 F: x: