

# **OIL ANALYSIS REPORT**



#### Machine Id **HLO** Component **Hydraulic System** Fluid **AW HYDRAULIC OIL ISO 46 (--- GAL)**

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. Please specify the component make and model with your next sample.

## Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>1ATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0005146		
Sample Date		Client Info		30 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water			>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Fitanium	ppm	ASTM D5185m	210	0		
Silver	ppm	ASTM D5185m		0		
Aluminum		ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10			
	ppm			0 3		
Copper	ppm	ASTM D5185m	>75			
Tin (a.e. a.e.)	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	1		
Barium	ppm	ASTM D5185m	5	0		
Nolybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	2		
Calcium	ppm	ASTM D5185m	200	80		
Phosphorus	ppm	ASTM D5185m	300	359		
Zinc	ppm	ASTM D5185m	370	446		
Sulfur	ppm	ASTM D5185m	2500	1044		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		909		
Particles >6µm		ASTM D7647	>2500	269		
Particles >14µm		ASTM D7647	>320	37		
Particles >21µm		ASTM D7647	>80	10		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Dil Cleanliness		ISO 4406 (c)	>/18/15	17/15/12		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.22		
2:36) Rev: 1	ing noring	, 10 1 11 00040	0.07	Contact/Locatio		

Report Id: PIOTAC [WUSCAR] 06221157 (Generated: 06/27/2024 13:22:36) Rev: 1

Contact/Location: JAMES DAWSON - PIOTAC Page 1 of 2



# **OIL ANALYSIS REPORT**

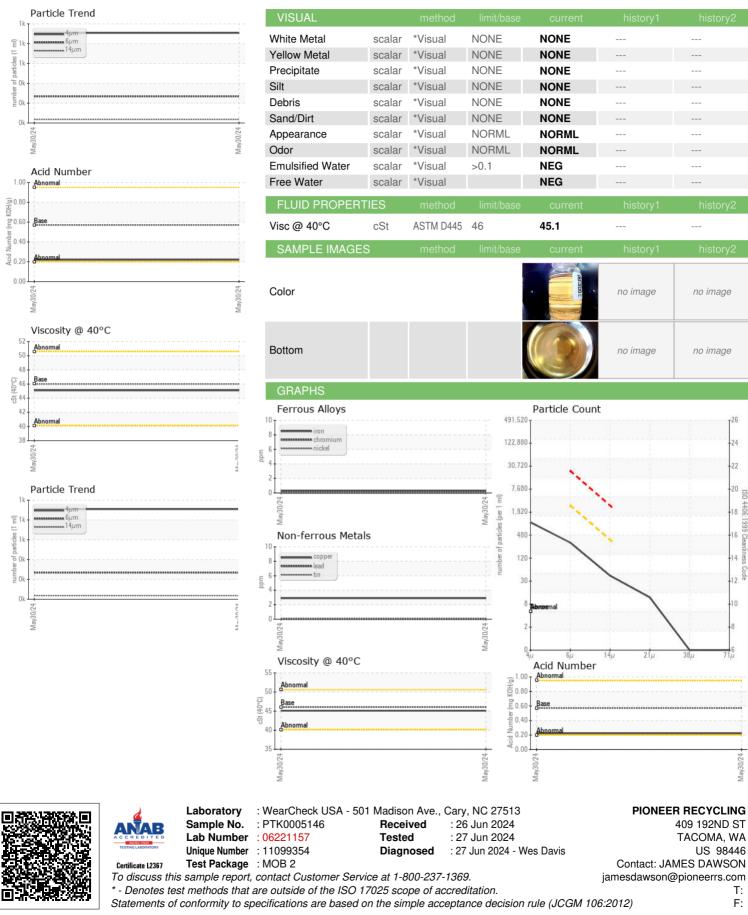

Report Id: PIOTAC [WUSCAR] 06221157 (Generated: 06/27/2024 13:22:37) Rev: 1

Contact/Location: JAMES DAWSON - PIOTAC