

### **OIL ANALYSIS REPORT**

ISO

Machine Id

# KAESER 6529482

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012274	KCP10581	
Sample Date		Client Info		11 Jun 2024	23 Jul 2020	
Machine Age	hrs	Client Info		20295	2890	
Oil Age	hrs	Client Info		0	175	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ATTENTION	SEVERE	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel		ASTM D5185m	>3	0	<1	
	ppm			0	0	
Titanium	ppm		>3	-		
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm		>50	18	0	
Tin	ppm	ASTM D5185m	>10	0	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	90	<1	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	5	0	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	<1	4	
Zinc	ppm	ASTM D5185m		103	0	
Sulfur	ppm	ASTM D5185m	23500	22181	73	
CONTAMINANTS				-		biotom/Q
		method	limit/base		history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm				0	
		ASTM D5185m		4	0	
	ppm	ASTM D5185m	>20	<1	<1	
Water		ASTM D5185m ASTM D6304	>0.05	-	<1 <b>4</b> 99.0	
Water	ppm	ASTM D5185m		<1	<1	
Water	ppm % ppm	ASTM D5185m ASTM D6304	>0.05	<1 0.010	<1 <b>4</b> 99.0	
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	<1 0.010 104 current 3404	<1 ▲ 99.0 ▲ 990000 <u>history1</u> 924	
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	<1 0.010 104 current	<1 ▲ 99.0 ▲ 990000 history1	  history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	<1 0.010 104 current 3404	<1 ▲ 99.0 ▲ 990000 <u>history1</u> 924	  history2
Water ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 <b>method</b> ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	<1 0.010 104 current 3404 1316	<1 ▲ 99.0 ▲ 990000 history1 924 503	  history2 
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	<1 0.010 104 current 3404 1316 97	<1 ▲ 99.0 ▲ 990000 history1 924 503 ● 86	  history2  
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	<1 0.010 104 current 3404 1316 97 25	<1 ♦ 99.0 ♦ 990000 history1 924 503 ● 86 ● 29	  history2   
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	<1 0.010 104 current 3404 1316 97 25 1	<1 ▲ 99.0 ▲ 990000 history1 924 503 ● 86 ● 29 4	  history2   
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm ESS	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 0.010 104 current 3404 1316 97 25 1 0	<1 ▲ 99.0 ▲ 990000 history1 924 503 ● 86 ● 29 4 0	  history2     


Report Id: CARSHR [WUSCAR] 06221197 (Generated: 06/27/2024 16:46:29) Rev: 1

Contact/Location: Service Manager - CARSHR Page 1 of 2



## **OIL ANALYSIS REPORT**

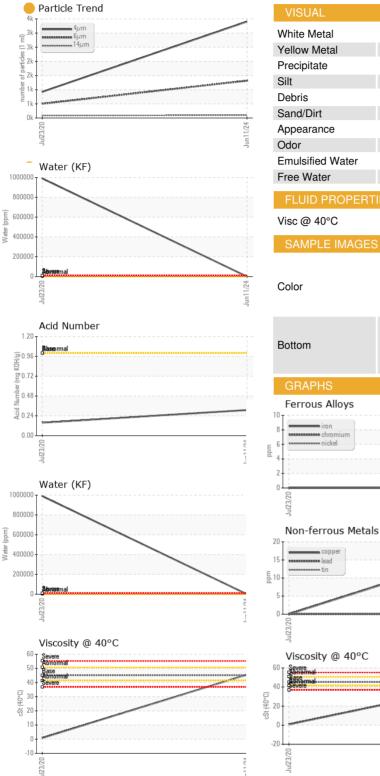

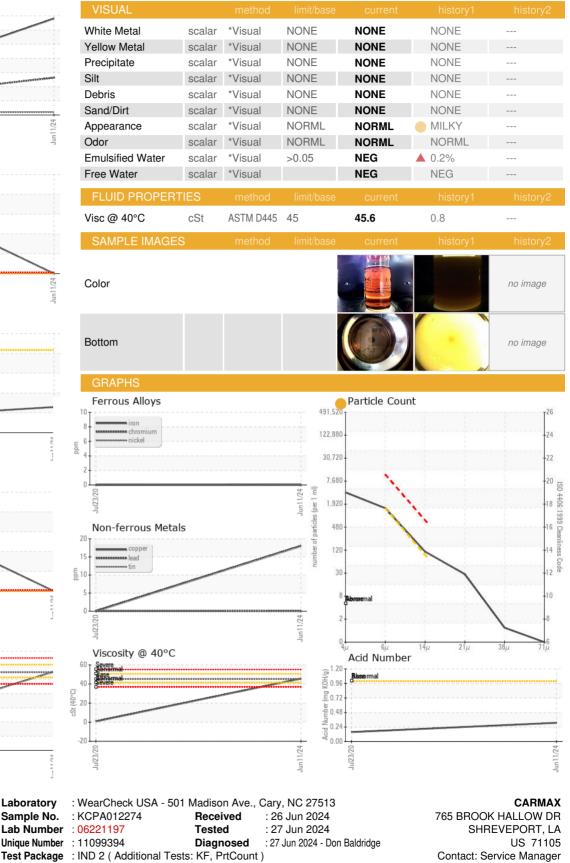

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CARSHR [WUSCAR] 06221197 (Generated: 06/27/2024 16:46:29) Rev: 1

Certificate 12367

Laboratory

Sample No.

Lab Number

Contact/Location: Service Manager - CARSHR Page 2 of 2

T: F: