




# OIL ANALYSIS REPORT

## Sample Rating Trend

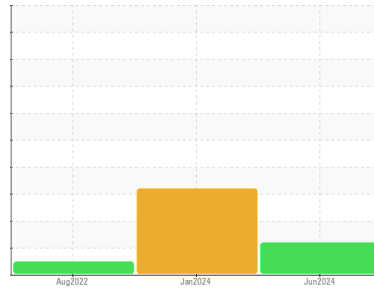

ISO



Machine Id

**7256864 (S/N 1060)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC128655</b>	KC126684	KC95203
Sample Date	Client Info			<b>18 Jun 2024</b>	24 Jan 2024	22 Aug 2022
Machine Age	hrs	Client Info		<b>6563</b>	5244	3862
Oil Age	hrs	Client Info		<b>2701</b>	0	2004
Oil Changed	Client Info			<b>Changed</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	2	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>8</b>	10	6
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	90	<b>14</b>	26	26
Calcium	ppm	ASTM D5185m	2	<b>0</b>	2	0
Phosphorus	ppm	ASTM D5185m		<b>0</b>	10	<1
Zinc	ppm	ASTM D5185m		<b>10</b>	0	7

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	1	0
Sodium	ppm	ASTM D5185m		<b>6</b>	6	10
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Water	%	ASTM D6304	>0.05	<b>0.010</b>	▲ 0.087	0.017
ppm Water	ppm	ASTM D6304	>500	<b>107</b>	▲ 872	175.1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>17550</b>	1592	1140
Particles >6µm		ASTM D7647	>1300	▲ <b>7607</b>	867	371
Particles >14µm		ASTM D7647	>80	▲ <b>158</b>	● 148	20
Particles >21µm		ASTM D7647	>20	<b>15</b>	● 50	5
Particles >38µm		ASTM D7647	>4	<b>0</b>	● 8	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	● 1	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>21/20/14</b>	● 18/17/14	17/16/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.33</b>	0.31	0.32


# OIL ANALYSIS REPORT

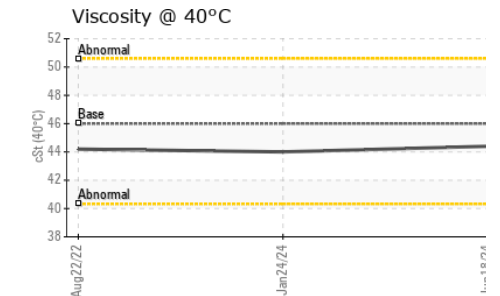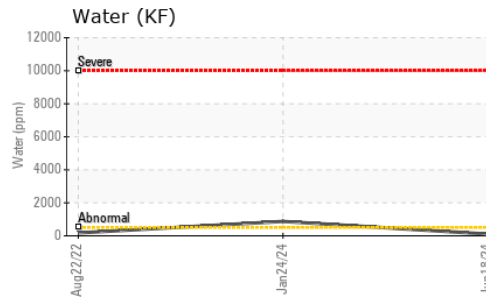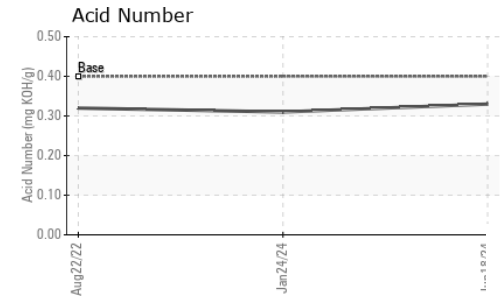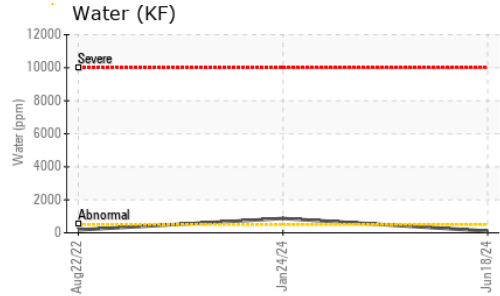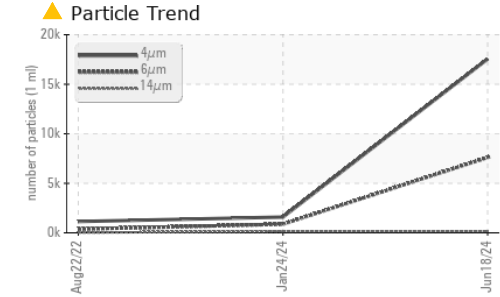




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.4	44.0	44.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

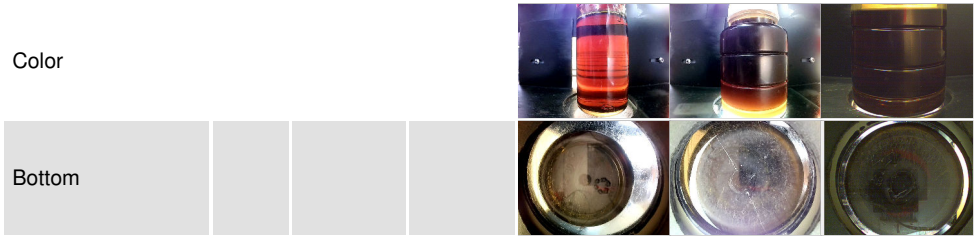

## GRAPHS

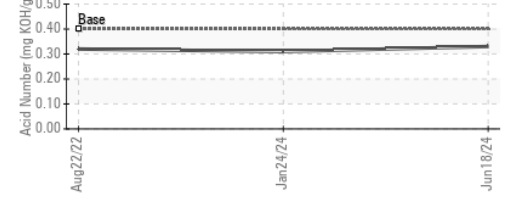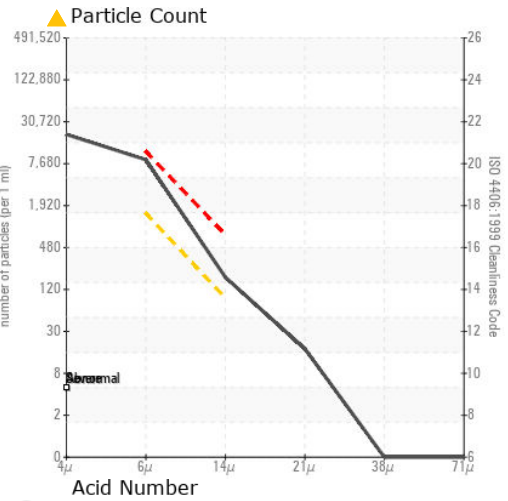

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128655  
**Lab Number** : 06221208  
**Unique Number** : 11099405  
**Test Package** : IND 2  
**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Don Baldrige

**LKQ**  
 13769 MARNE RD  
 NEWARK, OH  
 US 43055  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)