

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# **KAESER 7455914**

Component Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Feb2022 Oszároz Des2022 Feb2023 Mey2023 Aug2023 Nev2023 Feb2024 Juni2024						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC130356	KC120651	KC06012445
Sample Date		Client Info		07 Jun 2024	20 Feb 2024	14 Nov 2023
Machine Age	hrs	Client Info		19834	17599	18505
Oil Age	hrs	Client Info		6038	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	57	67	54
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	90	63	80	64
Calcium	ppm	ASTM D5185m	2	1	0	0
Phosphorus	ppm	ASTM D5185m		1	<1	0
Zinc	ppm	ASTM D5185m		3	2	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	<1
Sodium	ppm	ASTM D5185m		25	20	22
Potassium	ppm	ASTM D5185m	>20	11	6	5
Water	%	ASTM D6304	>0.05	0.025	0.011	0.015
ppm Water	ppm	ASTM D6304	>500	256	111	152.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21654	31774	47882
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u></u>	<u></u> 16390
Particles >14µm		ASTM D7647	>80	<b>1</b> 713	<u></u> 536	<u>1304</u>
Particles >21µm		ASTM D7647	>20	<u> </u>	<u>134</u>	<b>△</b> 312
Particles >38µm		ASTM D7647	>4	<u>^</u> 6	4	<u> </u>
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/17</u>	<u>22/20/16</u>	<u>\$\lambda\$\$ 23/21/18</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.38

0.27

0.27



## **OIL ANALYSIS REPORT**

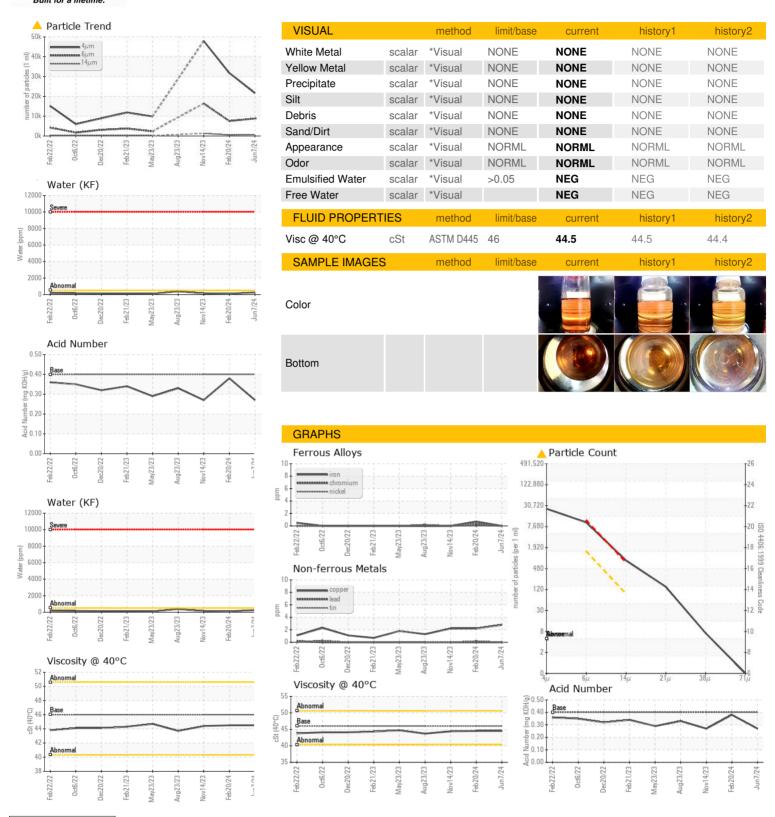





Certificate 12367

Laboratory Sample No.

Lab Number Unique Number : 11099414

Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC130356 Received : 06221217

: 26 Jun 2024 **Tested** : 27 Jun 2024 Diagnosed : 27 Jun 2024 - Don Baldridge

37 ARCHBALD HEIGHTS RD

US 18434 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CHEWY** 

T:

F:

JESSUP, PA