




# OIL ANALYSIS REPORT

Sample Rating Trend

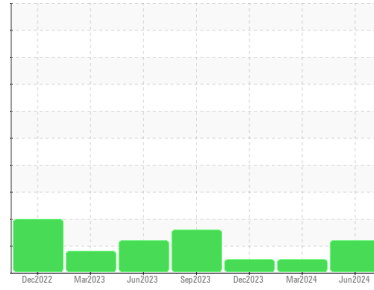

Area

[2405-0489]

Machine Id

**KAESER DSD250 6579583 (S/N 1084)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KC06221236</b>	KC111259	KC124457
Sample Date	Client Info		<b>17 Jun 2024</b>	13 Mar 2024	27 Dec 2023
Machine Age	hrs	Client Info	<b>40874</b>	40637	39676
Oil Age	hrs	Client Info	<b>0</b>	861	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>6</b>	6	15
Tin	ppm	ASTM D5185m >10	<b>2</b>	5	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Magnesium	ppm	ASTM D5185m 90	<b>17</b>	23	0
Calcium	ppm	ASTM D5185m 2	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	<b>4</b>	<1	23
Zinc	ppm	ASTM D5185m	<b>32</b>	20	0

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	0	0
Sodium	ppm	ASTM D5185m	<b>4</b>	7	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	<1
Water	%	ASTM D6304 >0.05	<b>0.015</b>	0.016	0.009
ppm Water	ppm	ASTM D6304 >500	<b>150</b>	161	97






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>19172</b>	4918	1364
Particles >6µm	ASTM D7647	>1300	<b>▲ 6831</b>	715	149
Particles >14µm	ASTM D7647	>80	<b>▲ 134</b>	50	14
Particles >21µm	ASTM D7647	>20	<b>11</b>	15	5
Particles >38µm	ASTM D7647	>4	<b>1</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>17/13	<b>▲ 20/14</b>	17/13	14/11

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.41</b>	0.45	0.36


# OIL ANALYSIS REPORT

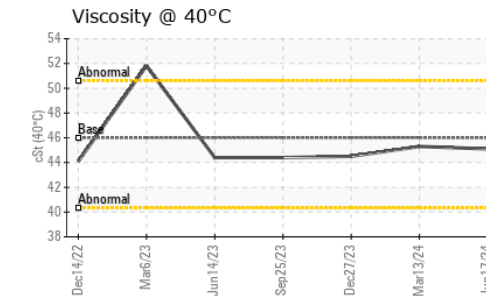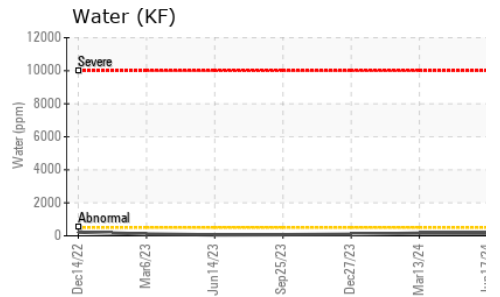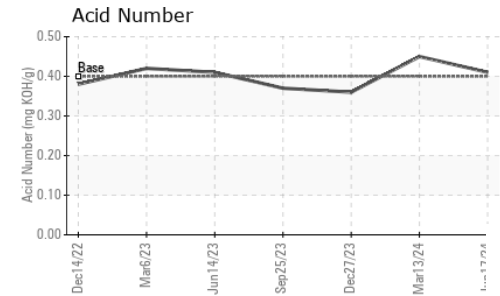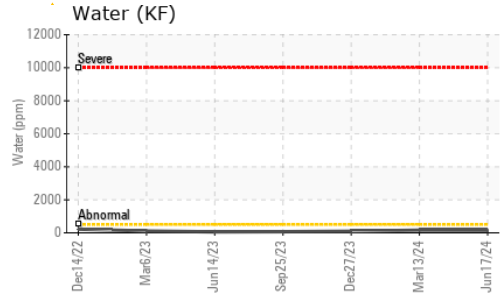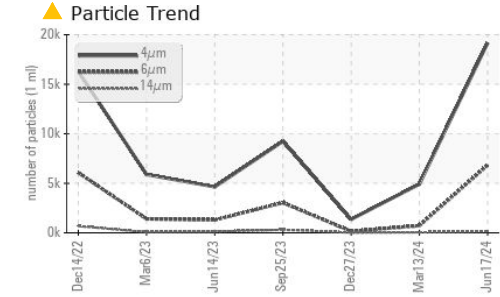





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.1	45.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

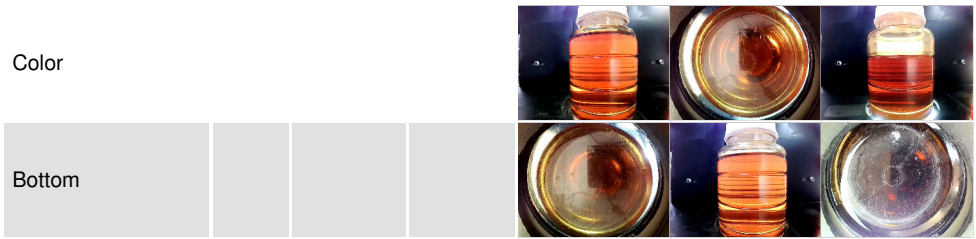

## GRAPHS

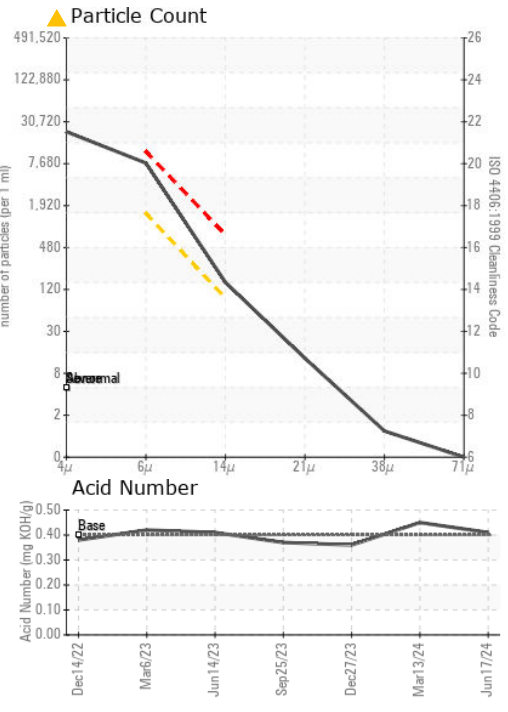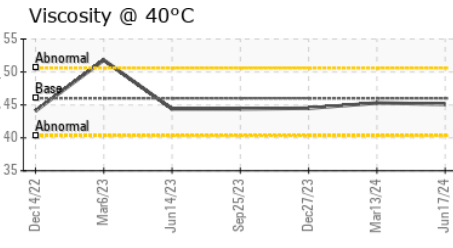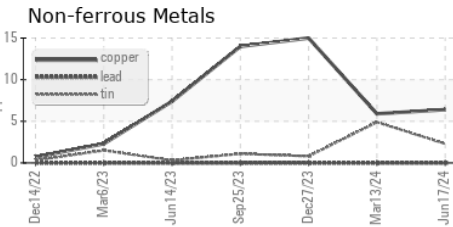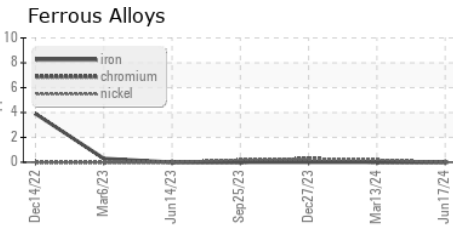

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC06221236  
**Lab Number** : 06221236  
**Unique Number** : 11099433  
**Test Package** : IND 2  
**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Don Baldrige

**CHARLOTTE PIPE & FOUNDRY COMPANY**  
 4149 CR 124A  
 WILDWOOD, FL  
 US 34785  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)