


# **OIL ANALYSIS REPORT**

Sample Rating Trend

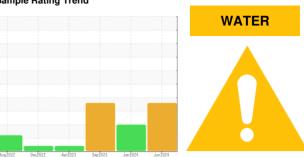

Machine Id

# KAESER 8395171 (S/N 1320)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### **DIAGNOSIS**

### Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample.

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. Excessive free water present.

### **Fluid Condition**

The AN level is acceptable for this fluid.

| SAMPLE INFORM             | MATION | method         | limit/base | current     | history1       | history2       |
|---------------------------|--------|----------------|------------|-------------|----------------|----------------|
| Sample Number             |        | Client Info    |            | KC129054    | KC121886       | KC108198       |
| Sample Date               |        | Client Info    |            | 04 Jun 2024 | 29 Jan 2024    | 14 Sep 2023    |
| Machine Age               | hrs    | Client Info    |            | 15899       | 14051          | 12063          |
| Oil Age                   | hrs    | Client Info    |            | 1848        | 0              | 0              |
| Oil Changed               |        | Client Info    |            | Not Changd  | N/A            | N/A            |
| Sample Status             |        |                |            | ABNORMAL    | ABNORMAL       | ABNORMAL       |
| WEAR METALS               |        | method         | limit/base | current     | history1       | history2       |
| Iron                      | ppm    | ASTM D5185m    | >50        | 2           | 0              | 2              |
| Chromium                  | ppm    | ASTM D5185m    | >10        | 0           | <1             | 0              |
| Nickel                    | ppm    | ASTM D5185m    | >3         | 0           | <1             | 0              |
| Titanium                  | ppm    | ASTM D5185m    | >3         | 0           | 0              | 0              |
| Silver                    | ppm    | ASTM D5185m    | >2         | 0           | 0              | 0              |
| Aluminum                  | ppm    | ASTM D5185m    | >10        | <1          | 1              | <1             |
| Lead                      | ppm    | ASTM D5185m    | >10        | 0           | 0              | 0              |
| Copper                    | ppm    | ASTM D5185m    | >50        | 11          | 10             | 10             |
| Tin                       | ppm    | ASTM D5185m    | >10        | 0           | 0              | 0              |
| Vanadium                  | ppm    | ASTM D5185m    |            | 0           | 0              | 0              |
| Cadmium                   | ppm    | ASTM D5185m    |            | 0           | 0              | 0              |
| ADDITIVES                 |        | method         | limit/base | current     | history1       | history2       |
| Boron                     | ppm    | ASTM D5185m    |            | 0           | 0              | 0              |
| Barium                    | ppm    | ASTM D5185m    | 90         | 0           | 0              | 0              |
| Molybdenum                | ppm    | ASTM D5185m    |            | 0           | 0              | 0              |
| Manganese                 | ppm    | ASTM D5185m    |            | <1          | 0              | <1             |
| Magnesium                 | ppm    | ASTM D5185m    | 90         | 12          | <1             | <1             |
| Calcium                   | ppm    | ASTM D5185m    | 2          | 0           | 0              | 0              |
| Phosphorus                | ppm    | ASTM D5185m    |            | 0           | 37             | 2              |
| Zinc                      | ppm    | ASTM D5185m    |            | 4           | 53             | 0              |
| CONTAMINANTS              |        | method         | limit/base | current     | history1       | history2       |
| Silicon                   | ppm    | ASTM D5185m    | >25        | 0           | 0              | <1             |
| Sodium                    | ppm    | ASTM D5185m    |            | 4           | 0              | 0              |
| Potassium                 | ppm    | ASTM D5185m    | >20        | 3           | 0              | <1             |
| Water                     | %      | ASTM D6304     | >0.05      | <u> </u>    | <b>△</b> 0.117 | <b>△</b> 0.271 |
| ppm Water                 | ppm    | ASTM D6304     | >500       | <u> </u>    | <b>▲</b> 1170  | <b>△</b> 2710  |
| FLUID CLEANLIN            | IESS   | method         | limit/base | current     | history1       | history2       |
| Particles >4μm            |        | ASTM D7647     |            |             |                |                |
| Particles >6µm            |        | ASTM D7647     | >1300      |             |                |                |
| Particles >14μm           |        | ASTM D7647     | >80        |             |                |                |
| Particles >21µm           |        | ASTM D7647     | >20        |             |                |                |
| Particles >38μm           |        | ASTM D7647     | >4         |             |                |                |
| Particles >71µm           |        | ASTM D7647     | >3         |             |                |                |
| Oil Cleanliness           |        | ISO 4406 (c)   | >/17/13    |             |                |                |
| FLUID DEGRADA             | TION   | method         | limit/base | current     | history1       | history2       |
| A - : -   N     / A N   ) |        | A OTA A DOO 45 | 0.4        |             | 0.00           | 0.00           |

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.32


0.34


0.32




## **OIL ANALYSIS REPORT**

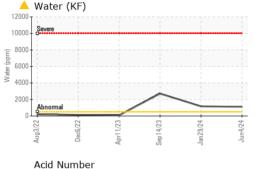






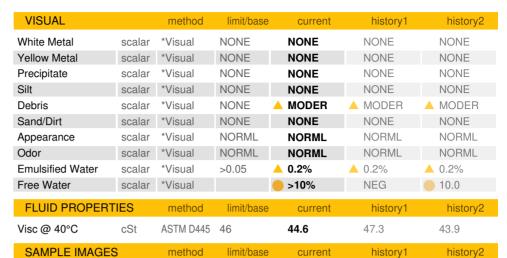



Color







### **GRAPHS**







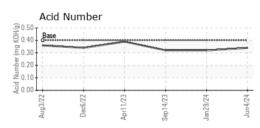





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC129054 Lab Number : 06221241

Test Package : IND 2

Unique Number : 11099438

Received : 26 Jun 2024 Tested : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Don Baldridge

**WICKETT & CRAIG** 120 COOPER RD CURWENSVILLE, PA

US 16833

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: