


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

FES C-6 600B (S/N 07061011)

Refrigeration Compressor

CAMCO 717 HT (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		r2011 Jul20	2 Oct2013 Dec2014	Mar2016 Jul2017 Dec2018 .	Jul2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0013023	USP0006023	USP0004710
Sample Date		Client Info		20 Jun 2024	12 Mar 2024	14 Dec 2023
Machine Age	hrs	Client Info		39315	32283	35281
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.002	0.001	0.001
ppm Water	ppm	ASTM D6304		22	7	15
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2519	3555	4208
Particles >6µm		ASTM D7647	>2500	697	577	933
Particles >14µm		ASTM D7647	>320	19	13	36
Particles >21µm		ASTM D7647	>80	1	2	7
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/11	19/16/11	19/17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.007	0.013	0.014	0.014





OIL ANALYSIS REPORT













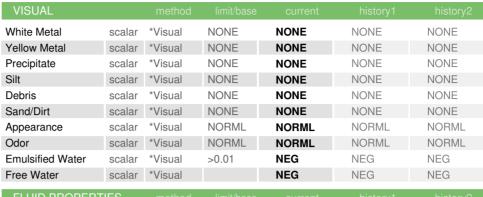


FLUID PROPER	THES	memod			riistory i	History
Visc @ 40°C	cSt	ASTM D445	69	64.0	65.1	64.8

SAIVIFLE IIVIAGES	memou	
Color		





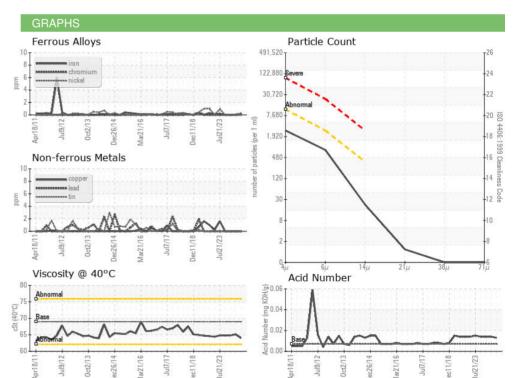





Certificate 12367

Laboratory Sample No. Lab Number

Test Package : IND 2

: USP0013023 : 06221274

Unique Number : 11099471

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Jun 2024 **Tested** : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Doug Bogart **MICHAEL FOODS -WAKEFIELD**

105 NORTH MAIN STREET WAKEFIELD, NE

US

T: (402)287-5184

Contact: BRUCE PARKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (402)287-5180 Contact/Location: BRUCE PARKER - MICWAK