

OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id

FES C-4 500B (S/N 23M193VS)

Refrigeration Compressor

CAMCO 717 HT (130 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		y2010 Aug20	11 Nov2012 Apr2014	Jul2015 Sep2016 Jul2018 .	lul2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0013022	USP0006019	USP0004708
Sample Date		Client Info		20 Jun 2024	12 Mar 2024	19 Dec 2023
Machine Age	hrs	Client Info		44696	92410	90572
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	0	3
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.01	0.002	0.001	0.002
ppm Water	ppm	ASTM D6304	>100	19	5	19
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		700	1347	2331
Particles >6µm		ASTM D7647	>2500	220	260	647
Particles >14µm		ASTM D7647	>320	13	10	40
Particles >21µm		ASTM D7647	>80	2	2	8
Particles >38μm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	17/15/11	18/15/10	18/17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.007	0.014	0.014	0.014





OIL ANALYSIS REPORT

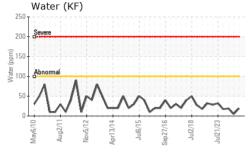


2k -		m m zm				1	
8k -							
6k - 4k -							1
2k 1	44	A	Δ.		N	4	MY
0k		~	N.	Jule/15	1	00	N. C.







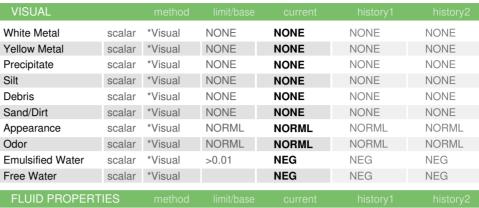

FLUID PROPE	N I IEO	method			riistory i	riistoryz
Visc @ 40°C	cSt	ASTM D445	69	61.9	62.8	62.9

SAMPLE	IMAGES

Bottom

Color









GRAPHS Ferrous Alloys

Non-ferrous Metals Viscosity @ 40°C



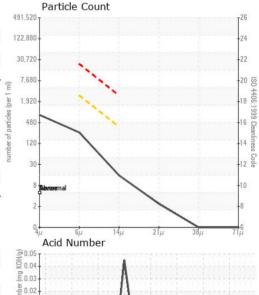





Certificate 12367

Laboratory Sample No. Lab Number : 06221275 Unique Number : 11099472 Test Package : IND 2

: USP0013022

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Doug Bogart

0.01

WAKEFIELD, NE

MICHAEL FOODS -WAKEFIELD

US Contact: BRUCE PARKER

105 NORTH MAIN STREET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: BRUCE PARKER - MICWAK

T: (402)287-5184

F: (402)287-5180