


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

GEA 800 GEA (S/N Y2072)

Refrigeration Compressor

CAMCO 717 HT (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| Smp2022 Dec2022 Apr2023 Jun2023 Dec2023 Dec2023 Jun2024 | | | | | | |
|---|---------|--------------|------------|-------------|-------------|-------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | USP0013029 | USP0004715 | USP0001460 |
| Sample Date | | Client Info | | 20 Jun 2024 | 19 Dec 2023 | 03 Oct 2023 |
| Machine Age | hrs | Client Info | | 42377 | 40723 | 39206 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 0 | 0 | 2 |
| Chromium | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >8 | 0 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 0 | 0 | 0 |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | <1 | 0 | <1 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 0 | 0 |
| Water | % | ASTM D6304 | >0.01 | 0.001 | 0.001 | 0.001 |
| ppm Water | ppm | ASTM D6304 | >100 | 15 | 9 | 1.3 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 8891 | 2143 | 1744 |
| Particles >6µm | | ASTM D7647 | >2500 | 2378 | 388 | 462 |
| Particles >14µm | | ASTM D7647 | >320 | 37 | 25 | 22 |
| Particles >21µm | | ASTM D7647 | >80 | 5 | 6 | 4 |
| Particles >38µm | | ASTM D7647 | >20 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >4 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 20/18/12 | 18/16/12 | 18/16/12 |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| A si al Niversala a v. (ANI) | I/OII/- | A CTM DOZA | 0.007 | 0.014 | 0.014 | 0.015 |

Acid Number (AN)

0.014


0.014

mg KOH/g ASTM D974 0.007

0.015



OIL ANALYSIS REPORT

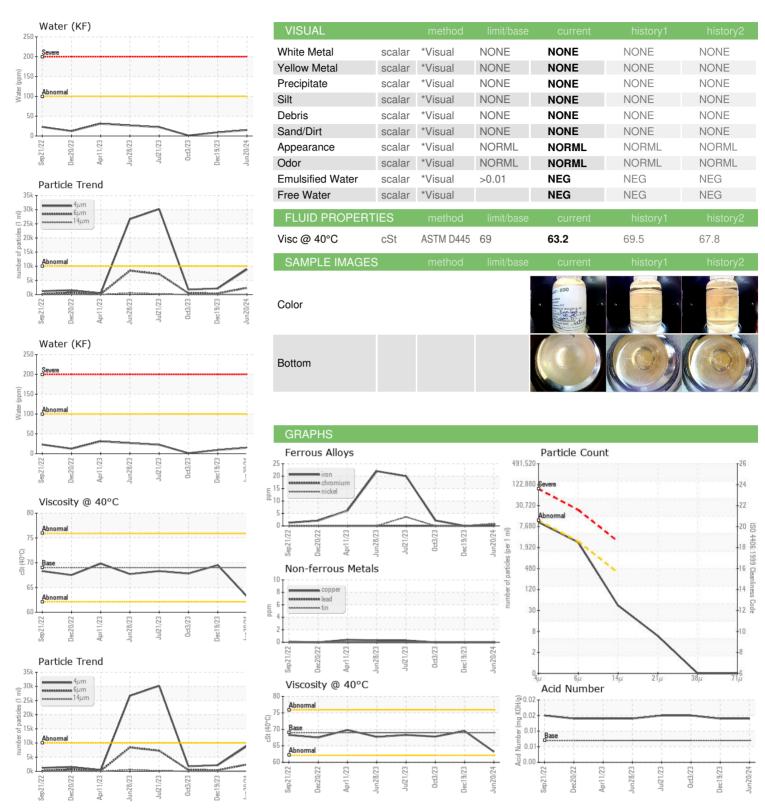





Certificate 12367

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : USP0013029 : 06221277 Unique Number : 11099474

Received **Tested** Test Package : IND 2

Diagnosed

: 27 Jun 2024 - Doug Bogart

: 26 Jun 2024

: 27 Jun 2024

MICHAEL FOODS -WAKEFIELD 105 NORTH MAIN STREET

WAKEFIELD, NE US

Contact: BRUCE PARKER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (402)287-5180 Contact/Location: BRUCE PARKER - MICWAK

T: (402)287-5184