


# **OIL ANALYSIS REPORT**

Sample Rating Trend

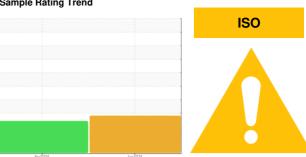

Machine Id

# LEROI 112719 - HP2 (S/N LE11365)

Compressor

CIMARRON HB-150 (--- GAL)

### **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil. The water content is negligible.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2024	Jun <b>2</b> 024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90004549	TO90004037	
Sample Date		Client Info		12 Jun 2024	04 Apr 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	2	2	
Lead	ppm	ASTM D5185m	>25	0	0	
Copper	ppm	ASTM D5185m	>50	0	<1	
Tin	ppm	ASTM D5185m	>15	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	0	<1	<1	
Calcium	ppm	ASTM D5185m	0	0	4	
Phosphorus	ppm	ASTM D5185m	0	0	45	
Zinc	ppm	ASTM D5185m	0	0	8	
Sulfur	ppm	ASTM D5185m	0	90	446	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	
Sodium	ppm	ASTM D5185m		3	7	
Potassium	ppm	ASTM D5185m	>20	<1	2	
Water	%	ASTM D6304	>2.26	0.549	0.913	
ppm Water	ppm	ASTM D6304	>22600	5490	9134	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>	<u>127601</u>	
Particles >6µm		ASTM D7647	>2500	<u> </u>	<u>▲</u> 31108	
Particles >14μm		ASTM D7647	>320	<b>▲</b> 3837	<u>▲</u> 8649	
Particles >21µm		ASTM D7647	>80	<u> </u>	<u>▲</u> 4518	
Particles >38μm		ASTM D7647	>20	<b>132</b>	<u>^</u> 269	
Particles >71µm		ASTM D7647	>4	<u> </u>	3	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>23/22/19</u>	<u>4</u> 24/22/20	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045

0.30

0.28



## OIL ANALYSIS REPORT

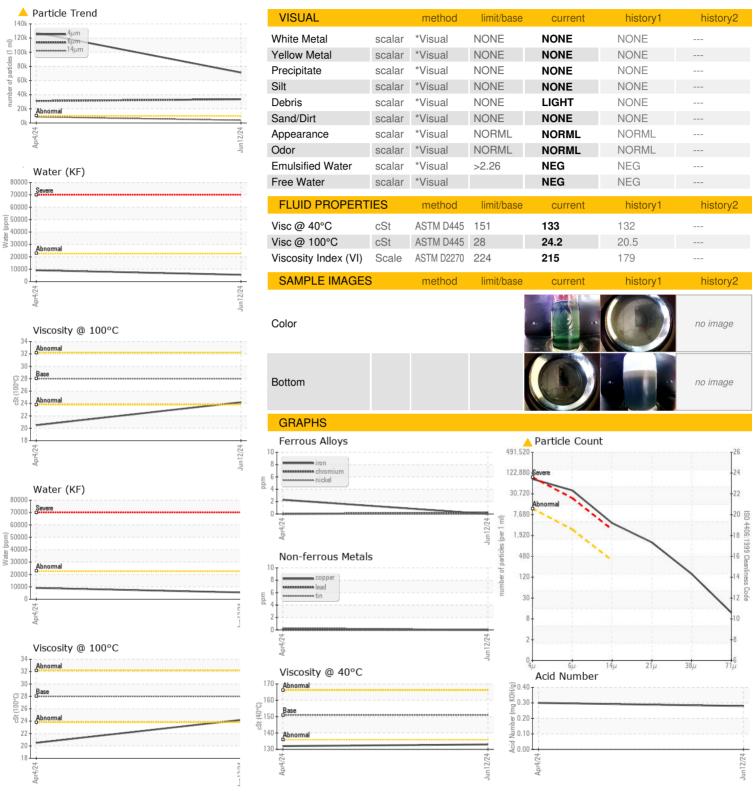





Certificate 12367

Lab Number

Laboratory Sample No.

: TO90004549 : 06221305

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Jun 2024 **Tested** : 27 Jun 2024

Unique Number : 11099502 Diagnosed : 28 Jun 2024 - Don Baldridge Test Package : IND 2 ( Additional Tests: KF, KV100, PrtCount, VI ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CIMARRON ENERGY - CARLSBAD** 

4425 GRANDI RD, UNIT F CARLSBAD, NM UM 88220-8923 Contact: CARLOS LEAL

cleal@cimarron.com

T:

Contact/Location: CARLOS LEAL - CIMCAR

F: