




OIL ANALYSIS REPORT

Sample Rating Trend

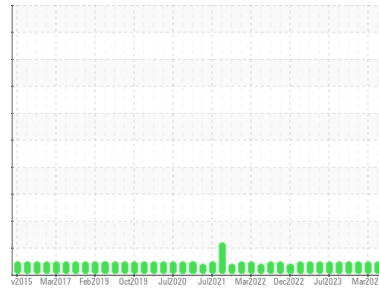

NORMAL



Area

[1031434]

Machine Id

LCL-10 ENGINE 2

Component

Rear Diesel Engine

Fluid

PHILLIPS 66 Fleet Supreme EC 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935313	WC0843462	WC0865376
Sample Date	Client Info		20 Jun 2024	19 Mar 2024	24 Jan 2024
Machine Age	hrs	Client Info	7238	7118	0
Oil Age	hrs	Client Info	210	90	0
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	3	3	7
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	2
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	2
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		67	77	63
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		93	89	73
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		18	13	34
Calcium	ppm	ASTM D5185m		2282	2444	2082
Phosphorus	ppm	ASTM D5185m	1116	975	1076	1044
Zinc	ppm	ASTM D5185m	1250	1287	1216	1148
Sulfur	ppm	ASTM D5185m		3808	4649	3453

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	2	3	3
Sodium	ppm	ASTM D5185m		<1	2	2
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Fuel	%	ASTM D3524	>5	<1.0	<1.0	<1.0

INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.2	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.3	7.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.6	17.1	17.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	12.9	13.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.7	10.33	7.1	6.8











OIL ANALYSIS REPORT

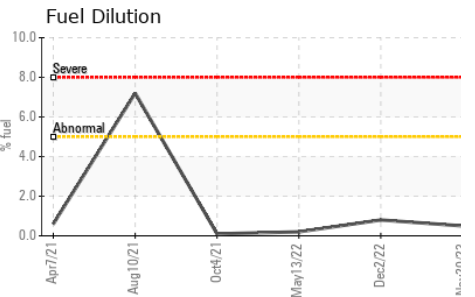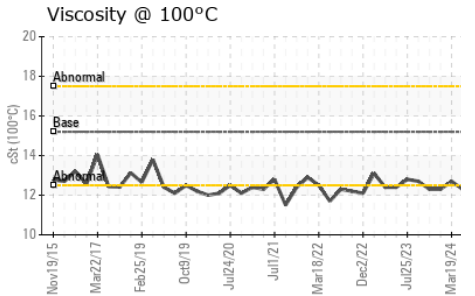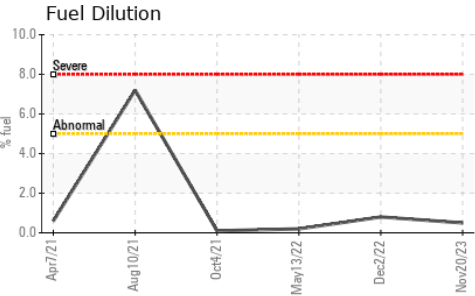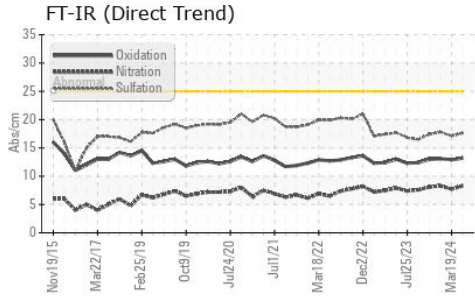

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.2	12.3	12.7

GRAPHS

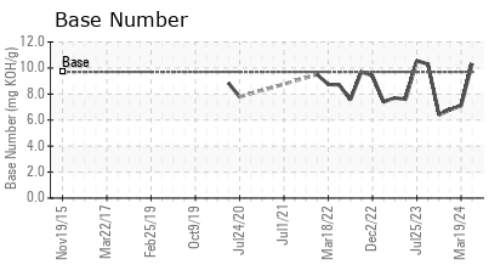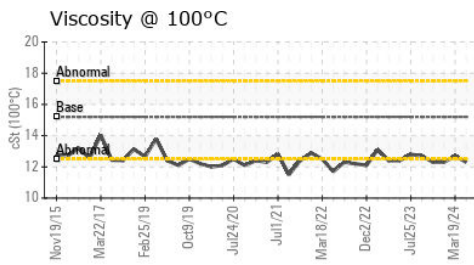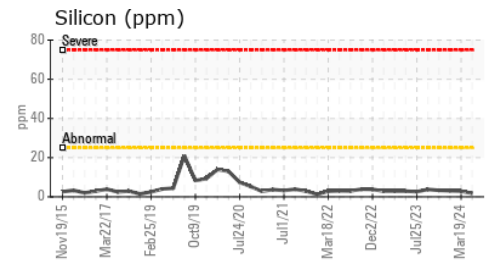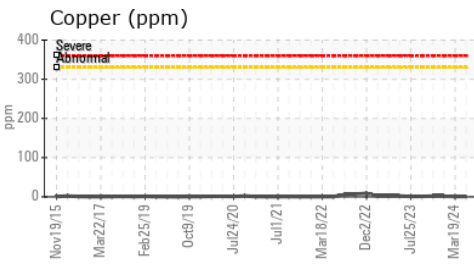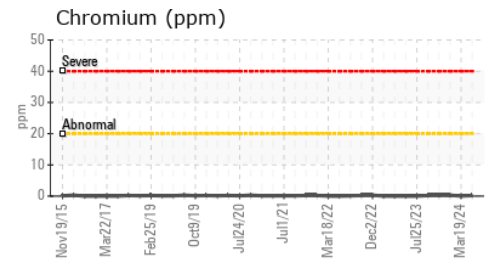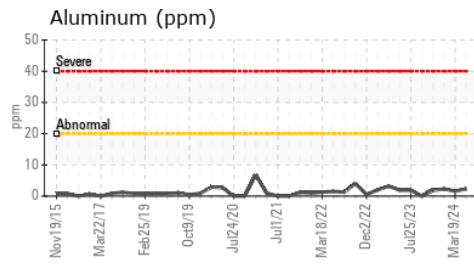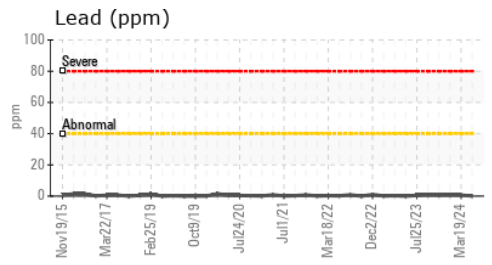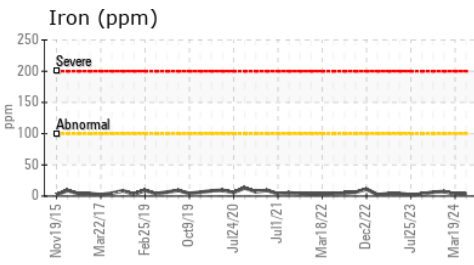

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935313 **Received** : 26 Jun 2024
Lab Number : 06221435 **Tested** : 27 Jun 2024
Unique Number : 11099632 **Diagnosed** : 27 Jun 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: FuelDilution)

AES USA - NORTH CHARLESTON
 5400 INTERNATIONAL BLVD, BLDG 88-20
 NORTH CHARLESTON, SC
 US 29418
 Contact: Maxime Banctel
 maxime.banctel@aes-gse.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: x