

OIL ANALYSIS REPORT

Sample Rating Trend





NORMAL

Machine Id

KAESER AS 25T 7005367 (S/N 1375)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA018730	KCPA009813	KCP46974
Sample Date		Client Info		03 Jul 2024	20 Nov 2023	10 Oct 2022
Machine Age	hrs	Client Info		38156	32739	24913
Oil Age	hrs	Client Info		0	0	8508
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm		>50	<1	5	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m	>10	0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	55	7	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	51	26	28
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		<1	2	17
Zinc	ppm	ASTM D5185m		6	0	0
Sulfur	ppm	ASTM D5185m		22117	18094	21249
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		14	8	11
Potassium	ppm	ASTM D5185m	>20	0	<1	3
Water	%	ASTM D6304	>0.05	0.023	0.011	0.015
ppm Water	ppm	ASTM D6304	>500	230	115	150.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		731	10701	9457
Particles >6µm		ASTM D7647	>1300	164	<u> </u>	889
Particles >14µm		ASTM D7647	>80	9	1 56	32
Particles >21µm		ASTM D7647	>20	2	4 4	6
Particles >38µm		ASTM D7647	>4	0	3	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>17/13	15/10	▲ 19/14	17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.30	0.30





OIL ANALYSIS REPORT














Bottom

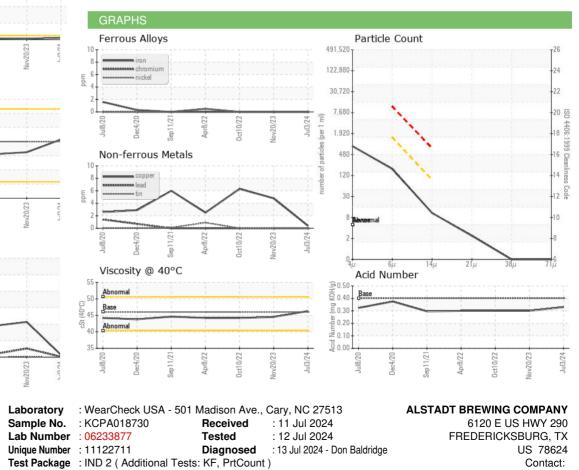

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: ? ? - ALTFRETX Page 2 of 2

T: F: