

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

FES TYSNRH HS209 (S/N 2013500)

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


C012 Feb.2014 May2016 Apr20118 Osc2019 Jav2022 Jus2023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0012200	USP0006735	USP0004979
Sample Date		Client Info		11 Jul 2024	11 Apr 2024	15 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	<1	<1
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	1	0
Lead	ppm	ASTM D5185m	>2	0	1	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.01	0.001	0.001	0.002
ppm Water	ppm	ASTM D6304	>100	10	7	25
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2885	4425	▲ 47249
Particles >6µm		ASTM D7647	>2500	846	1247	▲ 17734
Particles >14µm		ASTM D7647	>320	43	55	993
Particles >21µm		ASTM D7647	>80	6	8	<u>▲</u> 167
Particles >38µm		ASTM D7647	>20	0	0	2
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/13	19/17/13	<u>\$\rightarrow\$ 23/21/17</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.014





OIL ANALYSIS REPORT












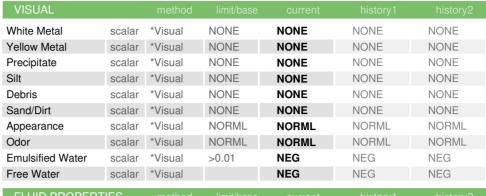


FLUID PROPER	IIIES	method	ilmit/base		nistory i	nistory2
Visc @ 40°C	cSt	ASTM D445	67	64.2	65.5	65.4

SAMPLE IMAGES	method		

Color





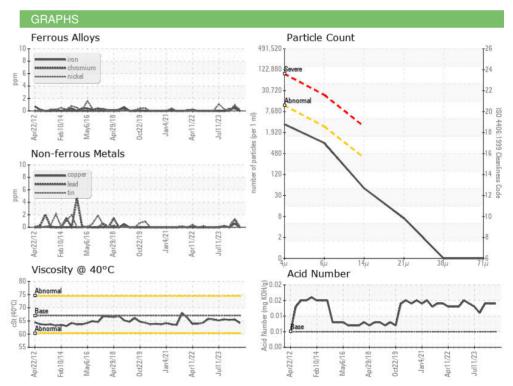





Certificate 12367

Laboratory

Sample No. Lab Number

: USP0012200 : 06233896 Unique Number : 11122730

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 11 Jul 2024 **Tested** : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Doug Bogart

TYSON-NORTH RICHLAND HILLS-USP

6350 BLOWN CT NORTH RICHLAND HILLS, TX US 76180

Contact: JOHN MORGAN

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (817)514-3519 F: