


OIL ANALYSIS REPORT

[TS01726877] 112069 - HP2 (S/N LE12455) Component Compressor

CIMARRON HB-150 (--- GAL)

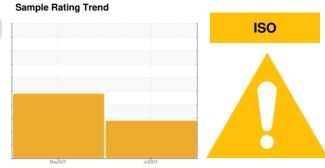

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2024	Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90004470	TO90004005	
Sample Date		Client Info		11 Jul 2024	02 May 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	SEVERE	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	11	6	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	<1	2	
Lead	ppm	ASTM D5185m	>25	0	0	
Copper	ppm	ASTM D5185m	>50	0	<1	
Tin	ppm	ASTM D5185m	>15	1	<1	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	0	
Barium	ppm	ASTM D5185m	0	0	1	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	0	0	<1	
Calcium	ppm	ASTM D5185m	0	0	6	
Phosphorus	ppm	ASTM D5185m	0	15	23	
Zinc	ppm	ASTM D5185m	0	0	5	
Sulfur	ppm	ASTM D5185m	0	521	189	
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	
Sodium	ppm	ASTM D5185m		1	8	
Potassium	ppm	ASTM D5185m	>20	3	2	
Water	%	ASTM D6304	>2.26	0.677	▲ 2.10	
ppm Water	ppm	ASTM D6304	>22600	6770	1 21000	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	194599	▲ 106811	
Particles >6µm		ASTM D7647	>2500	<u>^</u> 66247	▲ 31607	
Particles >14μm		ASTM D7647	>320	<u>^</u> 2109	617	
Particles >21µm		ASTM D7647	>80	453	51	
Particles >38µm		ASTM D7647	>20	<u>^</u> 21	0	
Particles >71µm		ASTM D7647	>4	<u>^</u> 6	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>\$\textstyle \textstyle 25/23/18</u>	<u>4</u> 24/22/16	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.38	0.086	



OIL ANALYSIS REPORT

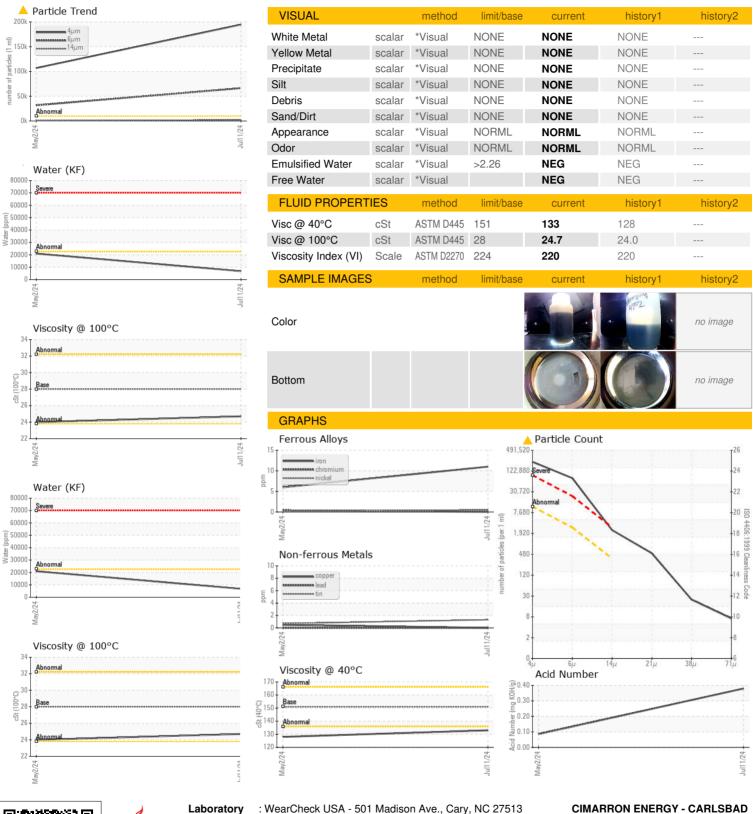



Certificate 12367

Lab Number

Laboratory Sample No.

: TO90004470 : 06233926 Unique Number : 11122760

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 11 Jul 2024 **Tested** : 16 Jul 2024 Diagnosed

: 16 Jul 2024 - Jonathan Hester

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

CARLSBAD, NM UM 88220-8923 Contact: CARLOS LEAL cleal@cimarron.com T:

4425 GRANDI RD, UNIT F

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CIMCAR [WUSCAR] 06233926 (Generated: 07/16/2024 14:59:33) Rev: 1

Contact/Location: CARLOS LEAL - CIMCAR

F: