



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
VOLVO EC750E 314256

Component
Left Travel

Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (4 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0002198	---	---
Sample Date	Client Info		26 Jun 2024	---	---
Machine Age	days	Client Info	472	---	---
Oil Age	days	Client Info	472	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	302	---	---
Chromium	ppm	ASTM D5185m >20	3	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m	<1	---	---
Aluminum	ppm	ASTM D5185m >100	2	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >60	<1	---	---
Tin	ppm	ASTM D5185m >5	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 111	<1	---	---
Barium	ppm	ASTM D5185m 0.0	13	---	---
Molybdenum	ppm	ASTM D5185m 0.9	<1	---	---
Manganese	ppm	ASTM D5185m 0.0	4	---	---
Magnesium	ppm	ASTM D5185m 39	3	---	---
Calcium	ppm	ASTM D5185m 93	105	---	---
Phosphorus	ppm	ASTM D5185m 920	337	---	---
Zinc	ppm	ASTM D5185m 104	42	---	---
Sulfur	ppm	ASTM D5185m 20179	13995	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >150	8	---	---
Sodium	ppm	ASTM D5185m	<1	---	---
Potassium	ppm	ASTM D5185m >20	4	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	MODER	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---




OIL ANALYSIS REPORT

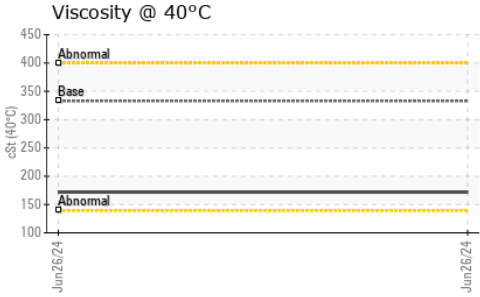

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 333	172	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

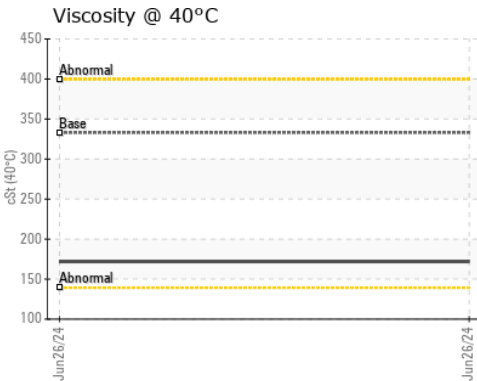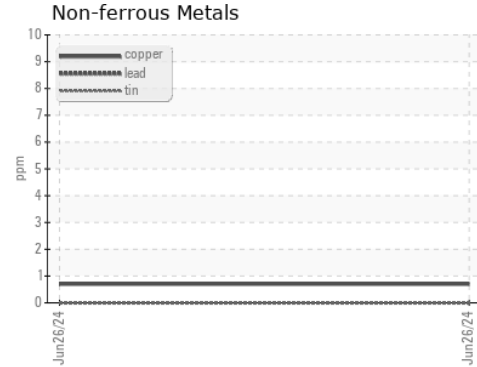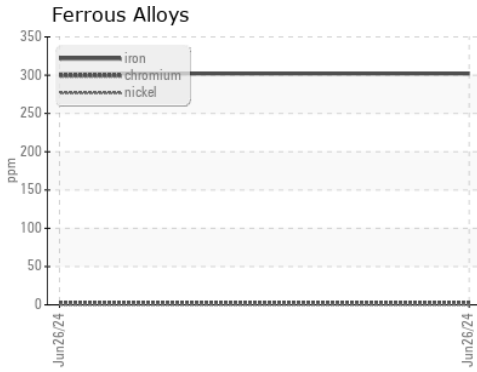

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002198
Lab Number : 06234096
Unique Number : 11122930
Test Package : CONST

Received : 11 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 14 Jul 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227

Contact: MARK CIULLA
 mciulla@mcclung-logan.com

T: (410)242-6500

F: (410)242-7835