

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**CUMMINS LD MANN S**  
Component  
**Starboard Genset**  
Fluid  
**KENDALL D3 40WT (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>HRE0000268</b>	---	---
Sample Date	Client Info		<b>05 Jul 2024</b>	---	---
Machine Age	hrs	Client Info	<b>46009</b>	---	---
Oil Age	hrs	Client Info	<b>1000</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

**CONTAMINATION**

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.1	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>30</b>	---	---
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>3</b>	---	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >12	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >17	<b>3</b>	---	---
Copper	ppm	ASTM D5185m >70	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>28</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>31</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>73</b>	---	---
Calcium	ppm	ASTM D5185m	<b>3549</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>518</b>	---	---
Zinc	ppm	ASTM D5185m	<b>600</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>3882</b>	---	---

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---




**INFRA-RED**

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.2</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.1</b>	---	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.2</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.7</b>	---	---





# OIL ANALYSIS REPORT

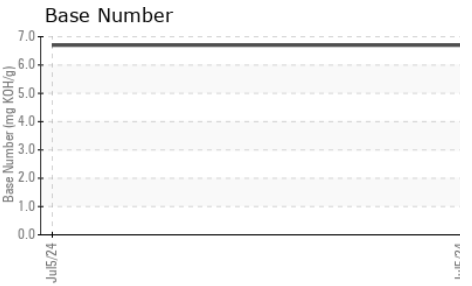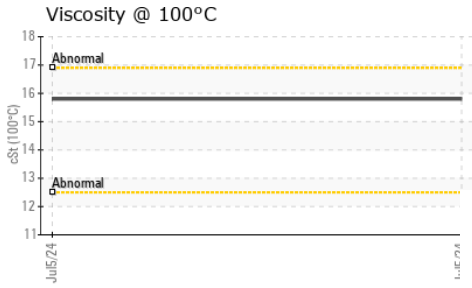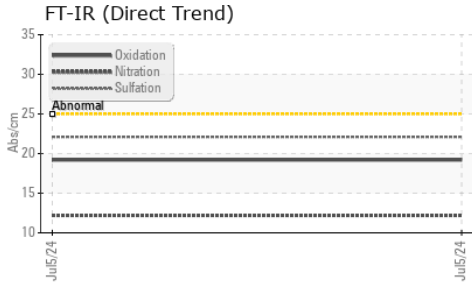

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.8	---	---

### GRAPHS

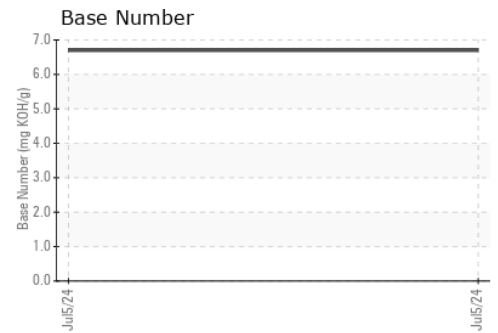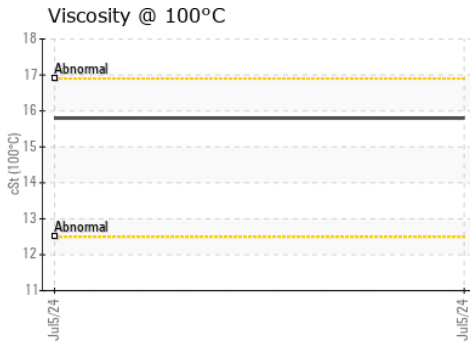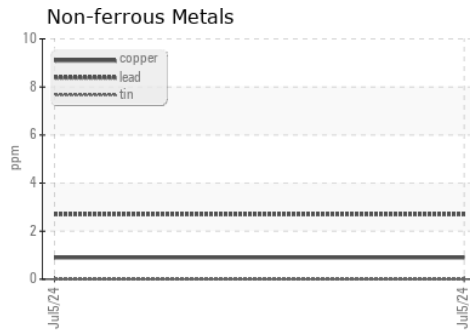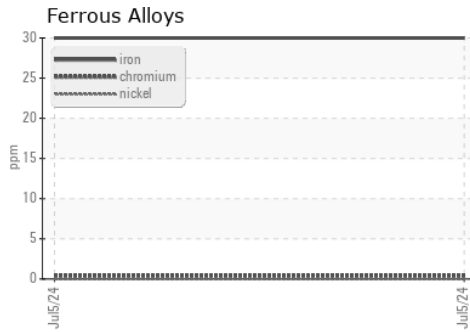

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000268      **Received** : 11 Jul 2024  
**Lab Number** : 06234363      **Tested** : 12 Jul 2024  
**Unique Number** : 11123197      **Diagnosed** : 14 Jul 2024 - Don Baldrige  
**Test Package** : FLEET

**SUPERIOR MARINE**  
 201 KELLY LANE  
 CHESAPEAKE, OH  
 US 45619

Contact: DARRELL KEARNS  
 darrellkearns@superiormarineinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: