


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR STEPHEN T
Component
Port Main Engine
Fluid
KENDALL SUPER-D XA 15W40 (--- GAL)

Sample Rating Trend

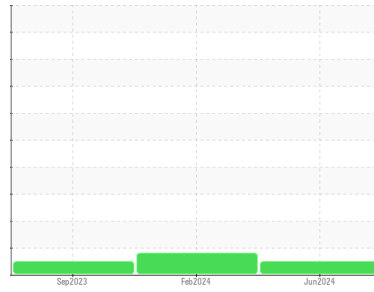

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	HRE0000290	WC0843960	WC0843995	
Sample Date	Client Info	24 Jun 2024	23 Feb 2024	22 Sep 2023	
Machine Age	hrs	Client Info	23714	20952	18312
Oil Age	hrs	Client Info	500	500	500
Oil Changed	Client Info	Changed	Changed	Changed	
Sample Status		NORMAL	ABNORMAL	NORMAL	

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>120	24	18	6
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		45	57	34
Silver	ppm	ASTM D5185m	>5	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	2	3	<1
Lead	ppm	ASTM D5185m	>40	2	6	<1
Copper	ppm	ASTM D5185m	>300	71	▲ 296	2
Tin	ppm	ASTM D5185m	>10	0	1	<1
Vanadium	ppm	ASTM D5185m		0	1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	50	25	44	107
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		17	21	55
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	270	317	320	211
Calcium	ppm	ASTM D5185m	1900	2190	2052	2113
Phosphorus	ppm	ASTM D5185m	1000	916	966	1092
Zinc	ppm	ASTM D5185m	1260	1118	1216	1383
Sulfur	ppm	ASTM D5185m	3400	3998	4096	4325

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	4	6	4
Sodium	ppm	ASTM D5185m		5	13	2
Potassium	ppm	ASTM D5185m	>20	3	8	2




INFRA-RED method limit/base current history1 history2

Soot %	%	*ASTM D7844		0.5	0.4	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.2	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	21.0	18.5

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	16.4	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	6.1	6.6	7.4





OIL ANALYSIS REPORT

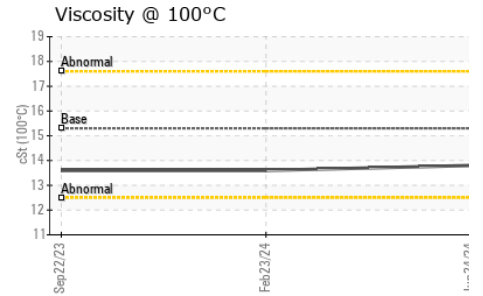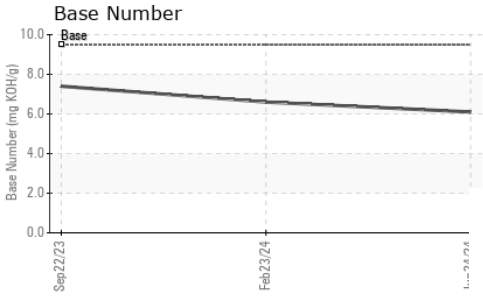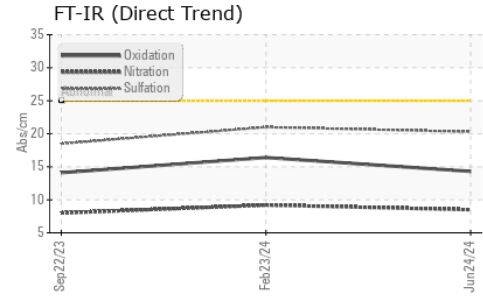

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.3	13.8	13.6

GRAPHS

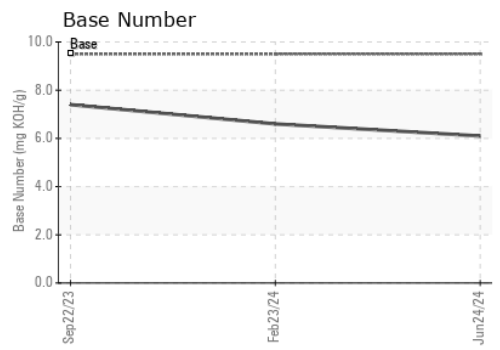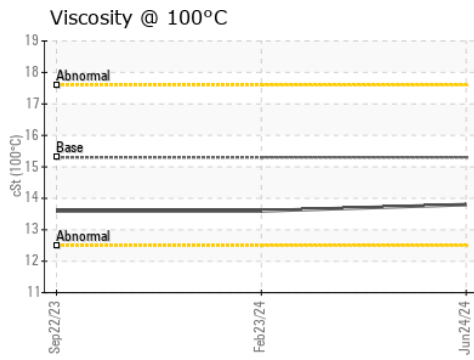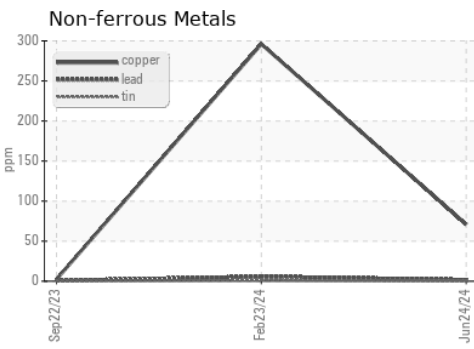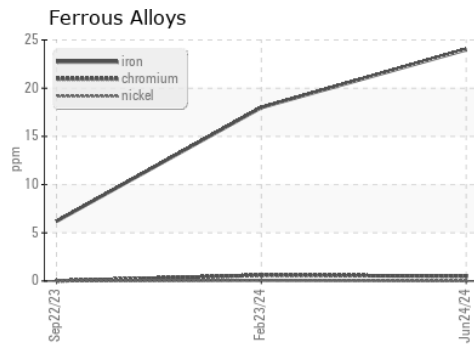

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HRE0000290 **Received** : 11 Jul 2024
Lab Number : 06234364 **Tested** : 12 Jul 2024
Unique Number : 11123198 **Diagnosed** : 12 Jul 2024 - Wes Davis
Test Package : FLEET

SUPERIOR MARINE
 201 KELLY LANE
 CHESAPEAKE, OH
 US 45619

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: DARRELL KEARNS
 darrellkearns@superiormarineinc.com
 T:
 F: