




OIL ANALYSIS REPORT

Sample Rating Trend

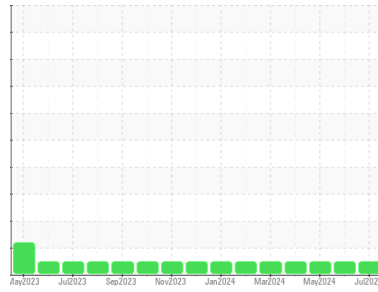

NORMAL



Area
OKLAHOMA

Machine Id

3592

Component

Diesel Engine

Fluid

MYSTIK JT-8 SYN SUPER HD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0899583	WC0935476	WC0929929
Sample Date	Client Info		08 Jul 2024	08 Jun 2024	07 May 2024
Machine Age	hrs	Client Info	2761	2614	2391
Oil Age	hrs	Client Info	2438	2291	2068
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	78	81	84
Chromium	ppm	ASTM D5185m	>20	8	8	8
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	77	66	67
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	4	3	4
Tin	ppm	ASTM D5185m	>15	<1	<1	1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	3
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		61	62	63
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m		954	1025	963
Calcium	ppm	ASTM D5185m		1181	1191	1150
Phosphorus	ppm	ASTM D5185m		1084	1059	1045
Zinc	ppm	ASTM D5185m		1289	1318	1294
Sulfur	ppm	ASTM D5185m		2608	3307	3311

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	6	6
Sodium	ppm	ASTM D5185m		14	15	12
Potassium	ppm	ASTM D5185m	>20	175	157	173
Glycol	%	*ASTM D2982		NEG	NEG	NEG

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	1.1	1.1	1.1
Nitration	Abs/cm	*ASTM D7624	>20	11.4	10.9	10.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.5	24.2	24.3


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.0	20.0	20.0
Base Number (BN)	mg KOH/g	ASTM D2896		6.6	7.2	6.7




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

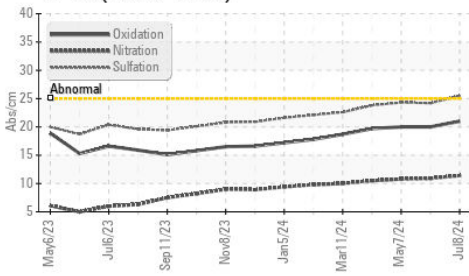


Aluminum (ppm)

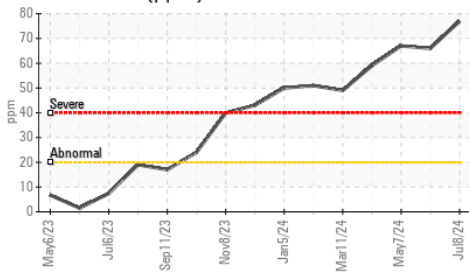


Glycol Contamination

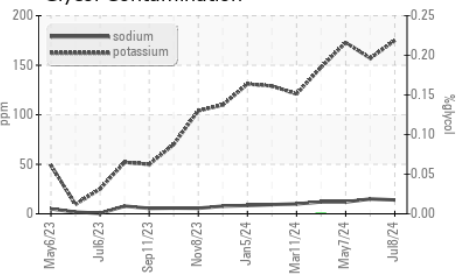

Aluminum (ppm)

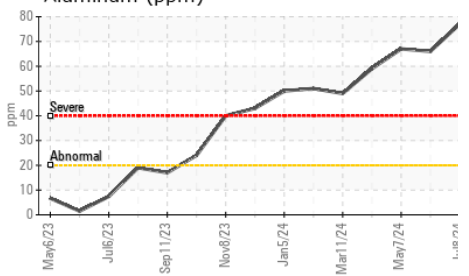

Glycol Contamination

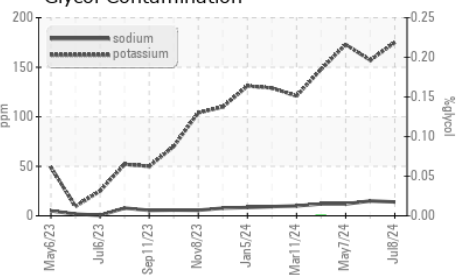


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	13.2	13.4

GRAPHS


Ferrous Alloys

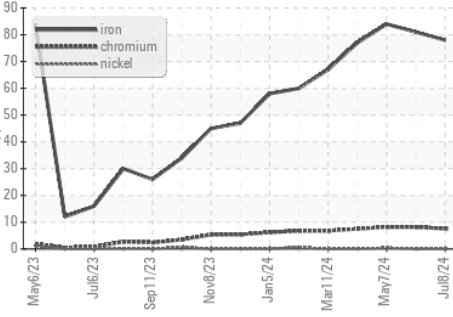


Non-ferrous Metals

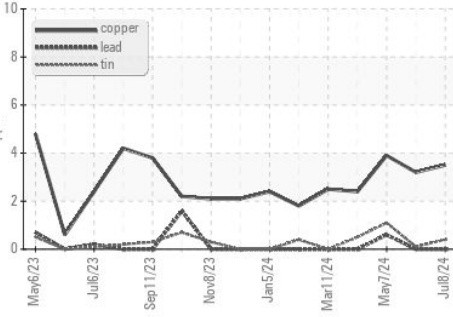

Viscosity @ 100°C

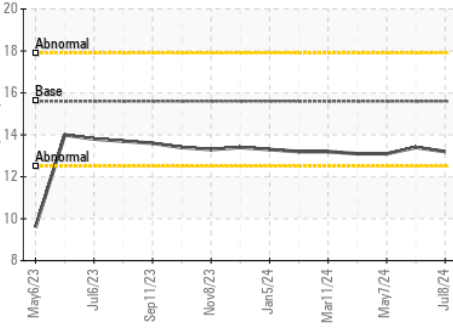

Base Number

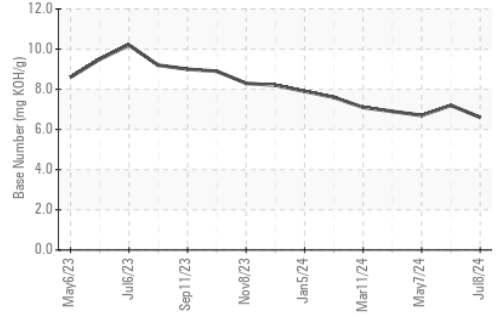

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0899583 **Received** : 12 Jul 2024
Lab Number : 06234718 **Tested** : 15 Jul 2024
Unique Number : 11123552 **Diagnosed** : 15 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: Glycol)

LIBERTY DISPOSAL
 6401 S EASTERN AVE
 OKLAHOMA CITY, OK
 US 73149
 Contact: M Rutherford
 M.Rutherford@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)