




# OIL ANALYSIS REPORT

Sample Rating Trend

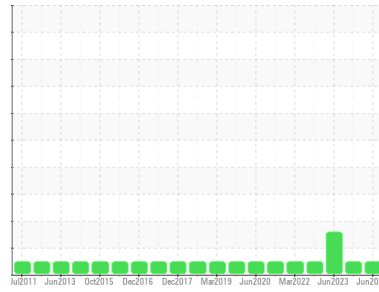

**NORMAL**



Machine Id  
**MACHINE 260**

Component  
**Hydraulic System**

Fluid  
**NOCO NOCOLUBE AW 46 (41 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0933785</b>	WC0847481	WC0784155
Sample Date	Client Info	<b>08 Jun 2024</b>	06 Oct 2023	23 Jun 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	7
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >20	<b>0</b>	<1	10
Tin	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	11
Calcium	ppm	ASTM D5185m 40	<b>54</b>	53	84
Phosphorus	ppm	ASTM D5185m 250	<b>315</b>	317	232
Zinc	ppm	ASTM D5185m 310	<b>372</b>	415	247
Sulfur	ppm	ASTM D5185m 2540	<b>5157</b>	4902	5050

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	4
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>302</b>	624	6755
Particles >6µm	ASTM D7647 >1300	<b>84</b>	197	▲ 2822
Particles >14µm	ASTM D7647 >160	<b>8</b>	21	▲ 385
Particles >21µm	ASTM D7647 >40	<b>1</b>	6	▲ 106
Particles >38µm	ASTM D7647 >10	<b>0</b>	1	5
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	1
Oil Cleanliness	ISO 4406 (c) >20/17/14	<b>15/14/10</b>	16/15/12	▲ 20/19/16


## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.34</b>	0.38	0.23




# OIL ANALYSIS REPORT


### Particle Trend

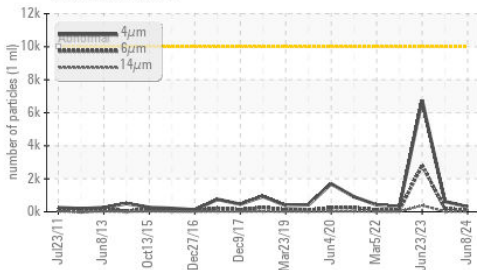


### Acid Number

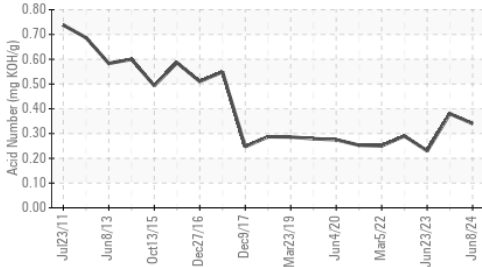

### Viscosity @ 40°C

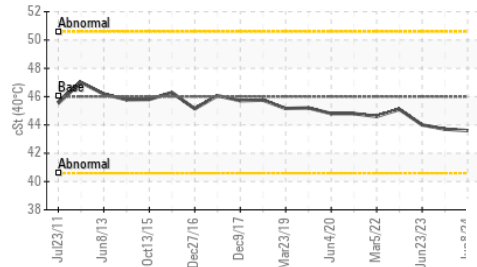


### Particle Trend

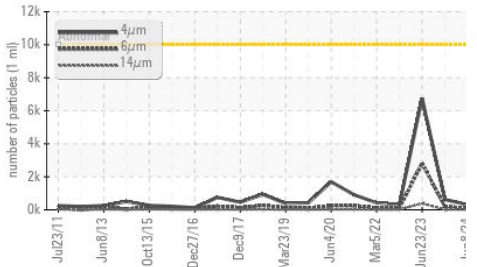



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.0	43.6	43.7	44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

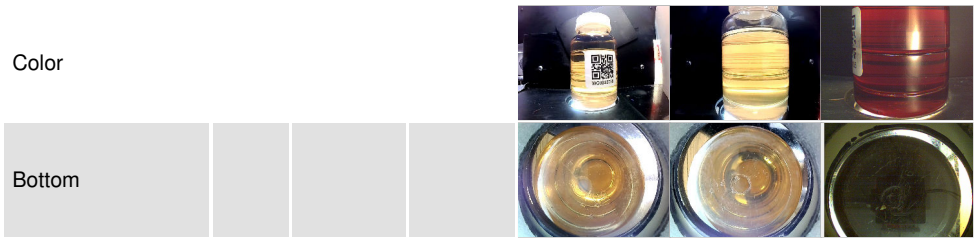

## GRAPHS

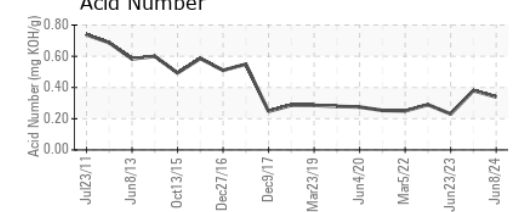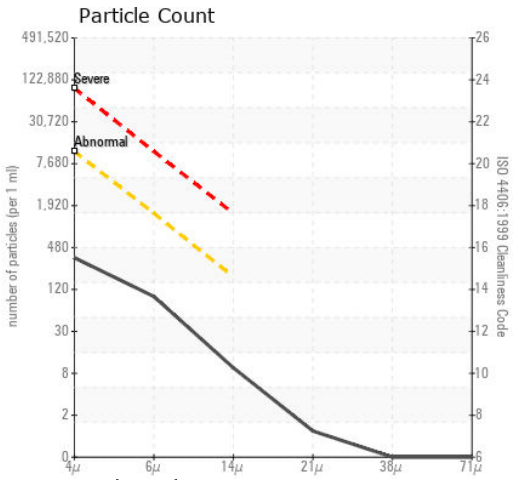

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0933785 **Received** : 12 Jul 2024  
**Lab Number** : 06234813 **Tested** : 15 Jul 2024  
**Unique Number** : 11123647 **Diagnosed** : 15 Jul 2024 - Wes Davis  
**Test Package** : IND 2

**ALLIANCE PRECISION PLASTICS**  
 1220 LEE RD  
 ROCHESTER, NY  
 US 14606  
 Contact: RON ORT  
 rort@allianceppc.com  
 T:  
 F: (716)425-7251

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)