


## **OIL ANALYSIS REPORT**

Sample Rating Trend

SAMPLE INFORMATION method limit/base







Machine Id

# A6044 (S/N 15988)

Hydraulic System

{not provided} (--- GAL)

### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.


### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |              |            |             | <u> </u> | ,        |
|------------------|----------|--------------|------------|-------------|----------|----------|
| Sample Number    |          | Client Info  |            | PH0000119   |          |          |
| Sample Date      |          | Client Info  |            | 11 Jul 2024 |          |          |
| Machine Age      | hrs      | Client Info  |            | 215300      |          |          |
| Oil Age          | hrs      | Client Info  |            | 0           |          |          |
| Oil Changed      |          | Client Info  |            | N/A         |          |          |
| Sample Status    |          |              |            | NORMAL      |          |          |
| CONTAMINATIO     | N        | method       | limit/base | current     | history1 | history2 |
|                  | IN       |              |            |             |          |          |
| Water            |          | WC Method    | >0.05      | NEG         |          |          |
| WEAR METALS      |          | method       | limit/base | current     | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Chromium         | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Nickel           | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | 0           |          |          |
| Silver           | ppm      | ASTM D5185m  |            | 0           |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Lead             | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Copper           | ppm      | ASTM D5185m  | >20        | 3           |          |          |
| Tin              | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0           |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0           |          |          |
| ADDITIVES        |          | method       | limit/base | current     | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 0           |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 0           |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0           |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0           |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 0           |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 69          |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 322         |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 484         |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 1523        |          |          |
|                  |          |              | 11 11 11   |             |          |          |
| CONTAMINANTS     | 5        | method       | limit/base | current     | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >15        | 0           |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 2           |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current     | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   | >10000     | 4953        |          |          |
| Particles >6μm   |          | ASTM D7647   | >2500      | 2209        |          |          |
| Particles >14μm  |          | ASTM D7647   | >320       | 148         |          |          |
| Particles >21µm  |          | ASTM D7647   | >80        | 22          |          |          |
| Particles >38µm  |          | ASTM D7647   | >20        | 1           |          |          |
| Particles >71µm  |          | ASTM D7647   | >4         | 0           |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >20/18/15  | 19/18/14    |          |          |
| FLUID DEGRADA    | NOITA    | method       | limit/base | current     | history1 | history2 |
| Acid Number (AN) | ma KOH/a | ASTM D8045   |            | 0.41        |          |          |

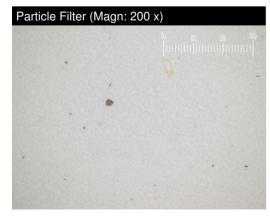



## **OIL ANALYSIS REPORT**

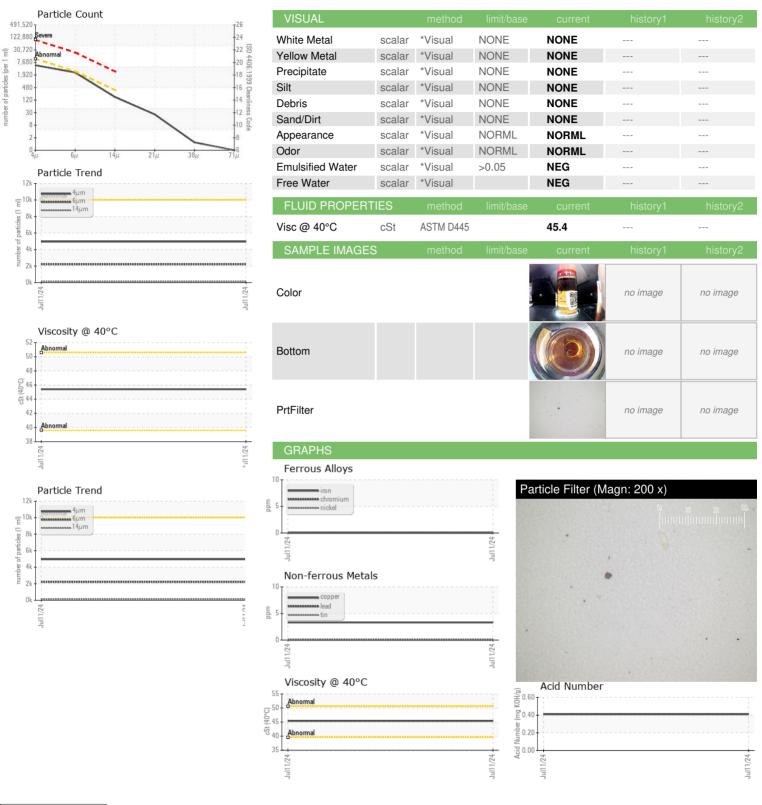





Certificate 12367

Laboratory Sample No.

Lab Number : 06234814 Unique Number : 11123648

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH0000119

Received **Tested** 

: 12 Jul 2024 : 17 Jul 2024 Diagnosed

: 17 Jul 2024 - Jonathan Hester

Test Package: PLANT (Additional Tests: PrtFilter) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**STRYKER - WRIGHT MEDICAL** 

1023 CHERRY RD MEMPHIS, TN US 38117

Contact: DOUGLAS LINTON douglas.linton@stryker.com

T: F:

Report Id: STRMEM [WUSCAR] 06234814 (Generated: 07/17/2024 09:20:05) Rev: 1

Contact/Location: DOUGLAS LINTON - STRMEM