




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 303.5 MINI EX2123 (S/N OCR502472)
 Component
Hydraulic System
 Fluid
DURALENE ZD AW 46 (--- GAL)

Sample Rating Trend

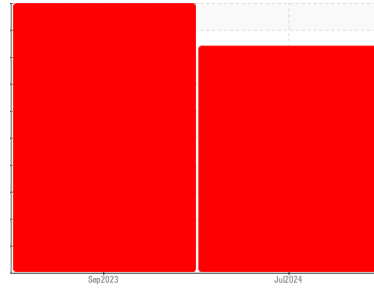

WEAR



DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

▲ Wear

The iron level has decreased, but is still severe.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

● Fluid Condition

The oil viscosity is higher than normal. Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		DC0031325	DC0027529	---
Sample Date	Client Info		08 Jul 2024	20 Sep 2023	---
Machine Age	hrs	Client Info	4530	4050	---
Oil Age	hrs	Client Info	110	4050	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			SEVERE	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	▲ 53	▲ 102	---
Chromium	ppm	ASTM D5185m >10	<1	1	---
Nickel	ppm	ASTM D5185m >10	0	1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	4	● 10	---
Lead	ppm	ASTM D5185m >10	0	1	---
Copper	ppm	ASTM D5185m >75	19	30	---
Tin	ppm	ASTM D5185m >10	0	<1	---
Vanadium	ppm	ASTM D5185m	0	<1	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	31	---
Barium	ppm	ASTM D5185m	<1	0	---
Molybdenum	ppm	ASTM D5185m	3	7	---
Manganese	ppm	ASTM D5185m	<1	1	---
Magnesium	ppm	ASTM D5185m	96	● 44	---
Calcium	ppm	ASTM D5185m	● 1329	● 2127	---
Phosphorus	ppm	ASTM D5185m	776	● 884	---
Zinc	ppm	ASTM D5185m	● 907	● 1128	---
Sulfur	ppm	ASTM D5185m	3177	4130	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	21	▲ 42	---
Sodium	ppm	ASTM D5185m	4	3	---
Potassium	ppm	ASTM D5185m >20	<1	3	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 135683	▲ 141789	---
Particles >6µm	ASTM D7647	>1300	▲ 5146	▲ 59221	---
Particles >14µm	ASTM D7647	>160	10	32	---
Particles >21µm	ASTM D7647	>40	4	7	---
Particles >38µm	ASTM D7647	>10	0	1	---
Particles >71µm	ASTM D7647	>3	0	1	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 24/20/10	▲ 24/23/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.97	1.31	---




OIL ANALYSIS REPORT

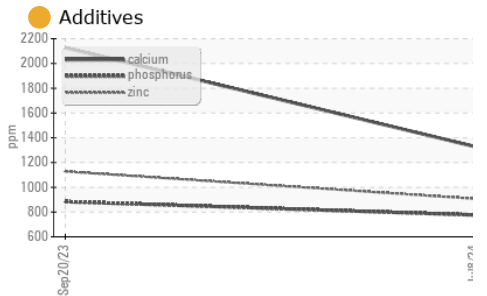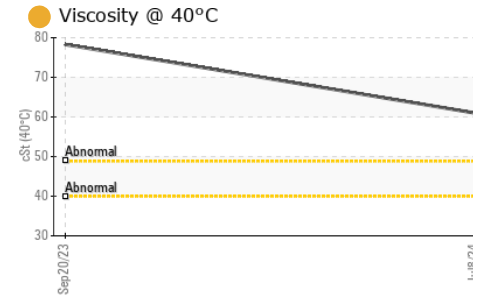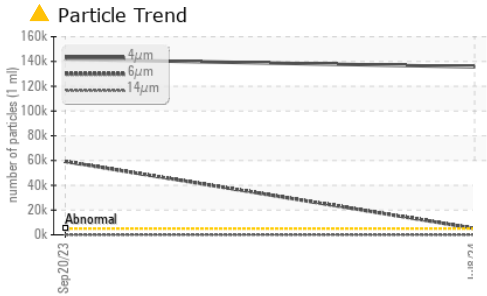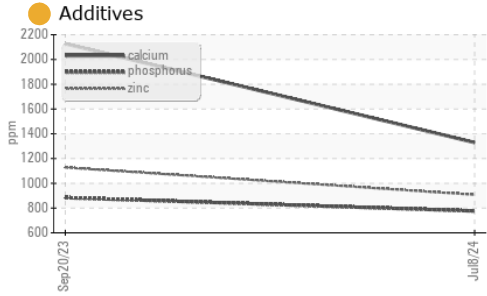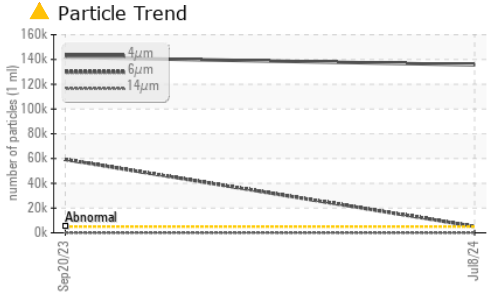





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	61.0	78.28	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

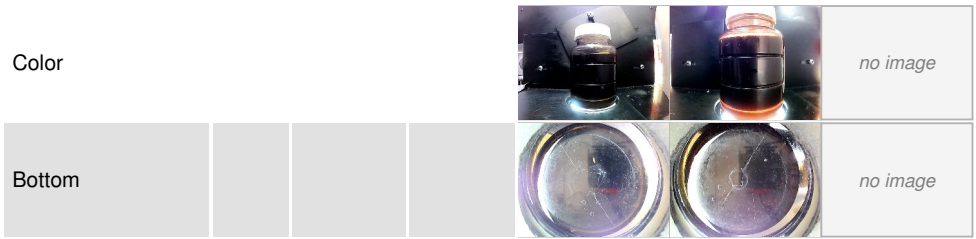

GRAPHS

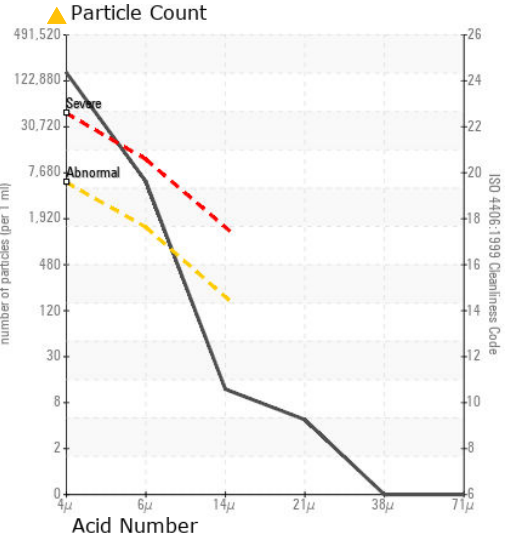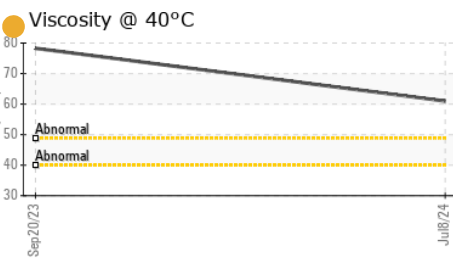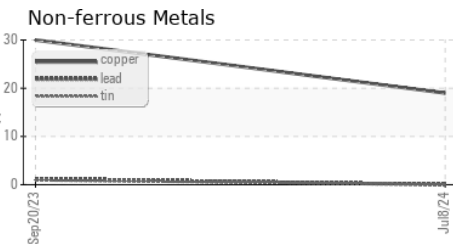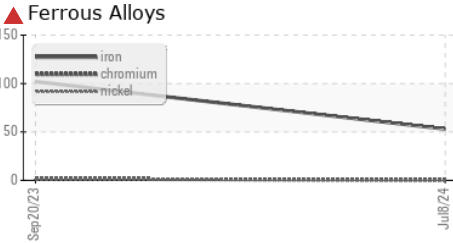

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0031325 **Received** : 12 Jul 2024
Lab Number : 06234833 **Tested** : 15 Jul 2024
Unique Number : 11123667 **Diagnosed** : 15 Jul 2024 - Don Baldrige
Test Package : MOB 2

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: RANDY SLADE
 rslade@comerconstruction.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)