


OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id

COALMILL-0/KI/TC

Gearbox

ROYAL PURPLE THERMYL-GLYDE WORM G

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data update for AN.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


GEAR ISO 460 (LTR) 2004 Apr2006 Jun2008 Feb2013 Feb2015 Feb2017 Mar2019 Jun2021 Jul2022						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0807535	WC0807334	WC0695049
Sample Date		Client Info		01 Jul 2024	11 Jan 2024	16 Jan 2023
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		43	39	27
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	ATTENTION
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	7	0	7
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	69	67	62
Tin	ppm	ASTM D5185m	>25	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m	190	1	<1	0
Phosphorus	ppm	ASTM D5185m		14	4	9
Zinc	ppm	ASTM D5185m		483	530	615
Sulfur	ppm	ASTM D5185m		12640	11760	11340
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		30231	46553	20778
Particles >6µm		ASTM D7647		8245	<u> </u>	7373
Particles >14µm		ASTM D7647	>640	389	483	529
Particles >21µm		ASTM D7647		86	83	83
Particles >38µm		ASTM D7647		3	0	2
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	22/20/16	<u>\$\rightarrow\$ 23/21/16</u>	22/20/16
FLUID DEGRADA	TION	method	limit/base		history1	history2
A -! -! Al Ni I (ANI)		ACTM DODAE	4.0	0.605	0.500	0.51





OIL ANALYSIS REPORT

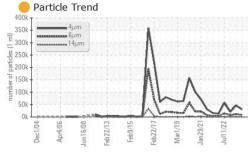











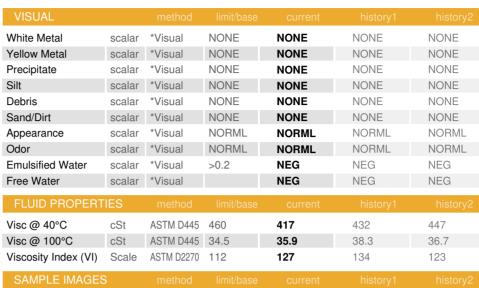

Color





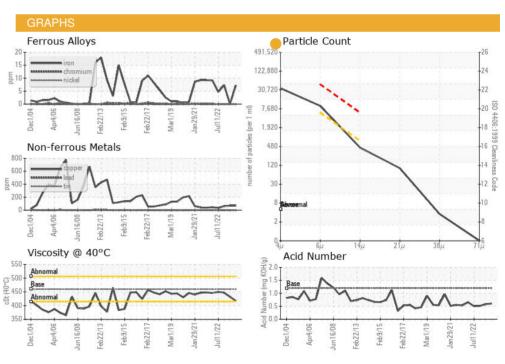





Certificate 12367

Laboratory

Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0807535 : 06234868

Received **Tested** Unique Number : 11123702

: 12 Jul 2024 : 15 Jul 2024

Diagnosed : 17 Jul 2024 - Doug Bogart Test Package : PLANT (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

J/POWER-BD

Contact: KENTO OKUHARA

Mitsuo_Miyahara@jpower.co.jp

JΡ

T:

F: x: