




# OIL ANALYSIS REPORT

Sample Rating Trend

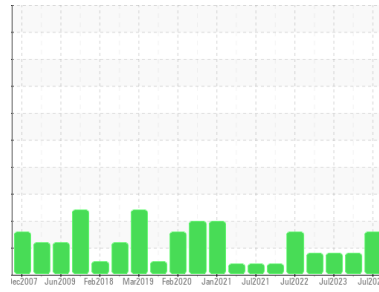

ISO



Machine Id

## COALMILL-2/KI/TC

Component

### Gearbox

Fluid

### ROYAL PURPLE THERMYL-GLYDE WORM GEAR ISO 460 (--- LTR)

#### DIAGNOSIS

##### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data update for AN.

##### Wear

All component wear rates are normal.

##### Contamination

There is a high amount of particulates present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0807536</b>	WC0807335	WC0807295
Sample Date	Client Info		<b>01 Jul 2024</b>	11 Jan 2024	03 Jul 2023
Machine Age	mths	Client Info	<b>0</b>	0	21
Oil Age	mths	Client Info	<b>34</b>	28	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

#### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

#### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>8</b>	0	4
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	1
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m	>200	<b>55</b>	52	45
Tin	ppm	ASTM D5185m	>25	<b>4</b>	4	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

#### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>81</b>	71	66
Calcium	ppm	ASTM D5185m	190	<b>4</b>	2	<1
Phosphorus	ppm	ASTM D5185m		<b>11</b>	5	10
Zinc	ppm	ASTM D5185m		<b>1603</b>	1619	1700
Sulfur	ppm	ASTM D5185m		<b>14053</b>	12438	15565

#### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>6</b>	4	3
Sodium	ppm	ASTM D5185m		<b>3</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	4

#### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>225885</b>	216591	98932
Particles >6µm	ASTM D7647	>5000	<b>▲ 44468</b>	▲ 29641	▲ 10280
Particles >14µm	ASTM D7647	>640	<b>▲ 727</b>	429	63
Particles >21µm	ASTM D7647	>160	<b>▲ 164</b>	73	12
Particles >38µm	ASTM D7647	>40	<b>3</b>	2	0
Particles >71µm	ASTM D7647	>10	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>--/19/16	<b>▲ 25/23/17</b>	▲ 25/22/16	▲ 24/21/13

#### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	<b>0.777</b>	1.31	0.372




# OIL ANALYSIS REPORT

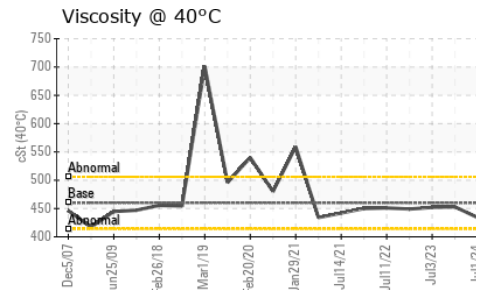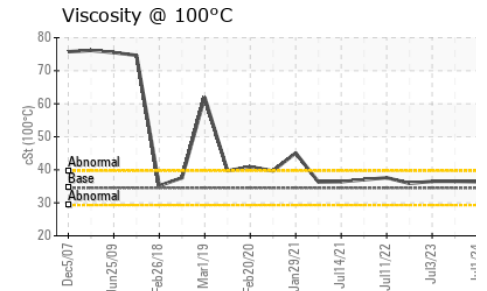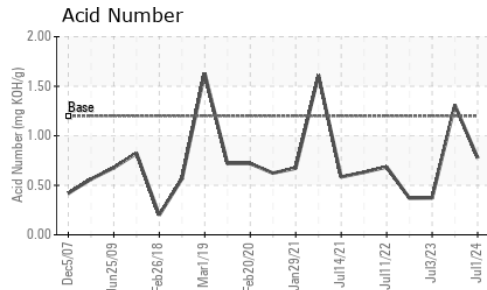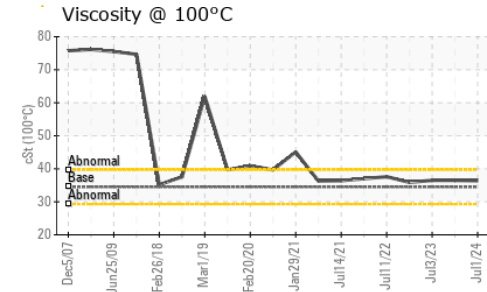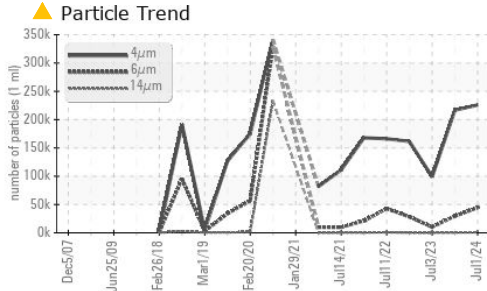






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	460	434	453
Visc @ 100°C	cSt	ASTM D445	34.5	36.4	36.5
Viscosity Index (VI)	Scale	ASTM D2270	112	125	121

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

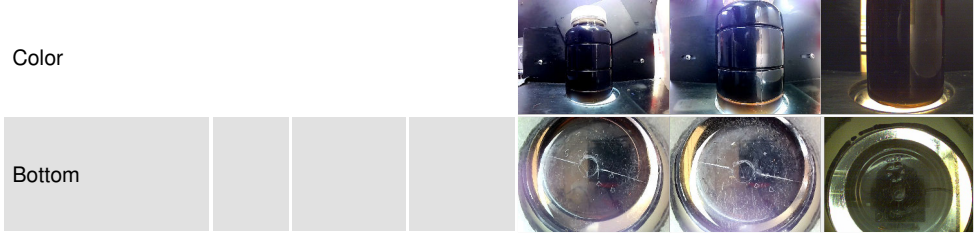

## GRAPHS

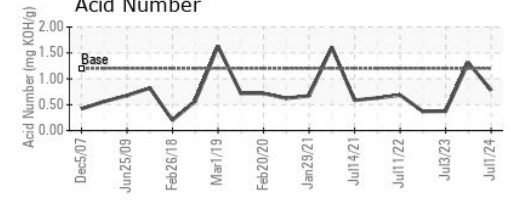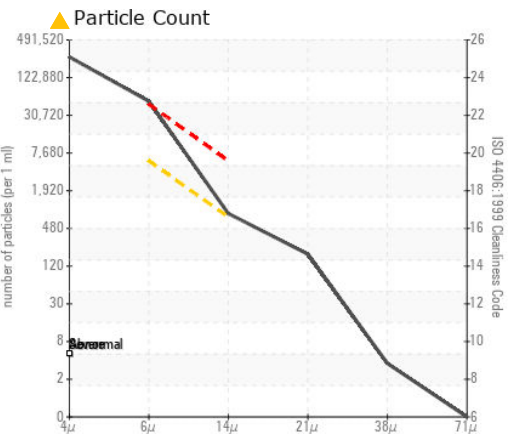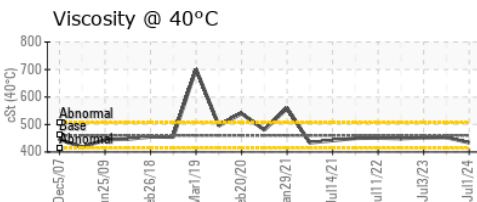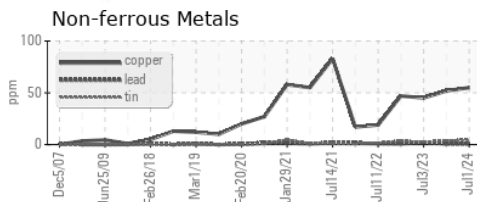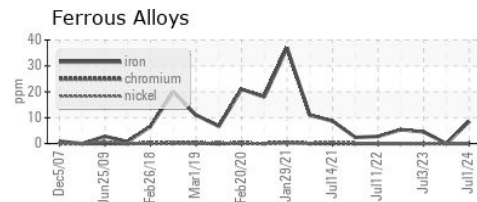

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0807536  
 Lab Number : 06234869  
 Unique Number : 11123703  
 Test Package : PLANT ( Additional Tests: KV100, VI )  
 Received : 12 Jul 2024  
 Tested : 15 Jul 2024  
 Diagnosed : 17 Jul 2024 - Doug Bogart

J/POWER-BD

Contact: KENTO OKUHARA  
 Mitsuo\_Miyahara@jpower.co.jp

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: x