




# OIL ANALYSIS REPORT

Sample Rating Trend

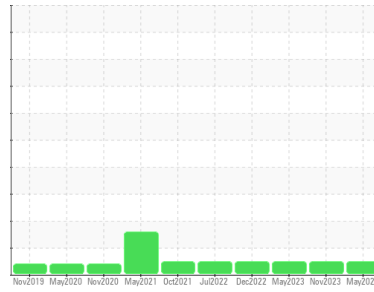

**NORMAL**



Machine Id

**OG/4WM/CO**

Component

**Hydraulic System**

Fluid

**TEXACO RANDO WM 32 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0932121</b>	WC0807318	WC0807248
Sample Date	Client Info		<b>15 May 2024</b>	23 Nov 2023	16 May 2023
Machine Age	mths	Client Info	<b>0</b>	0	21
Oil Age	mths	Client Info	<b>34</b>	28	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	0
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	<1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	<1
Copper	ppm	ASTM D5185m	>20	<b>10</b>	9
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0
Barium	ppm	ASTM D5185m		<b>0</b>	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	2
Calcium	ppm	ASTM D5185m		<b>45</b>	38
Phosphorus	ppm	ASTM D5185m		<b>336</b>	323
Zinc	ppm	ASTM D5185m		<b>400</b>	423
Sulfur	ppm	ASTM D5185m		<b>1225</b>	1086

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>0</b>	0
Sodium	ppm	ASTM D5185m		<b>2</b>	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>937</b>	479	179
Particles >6µm	ASTM D7647	>1300	<b>276</b>	163	44
Particles >14µm	ASTM D7647	>160	<b>17</b>	7	5
Particles >21µm	ASTM D7647	>40	<b>5</b>	2	2
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/15/11</b>	16/15/10	15/13/10

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.45	<b>0.31</b>	0.30

# OIL ANALYSIS REPORT

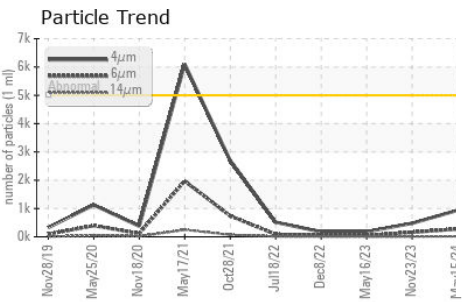
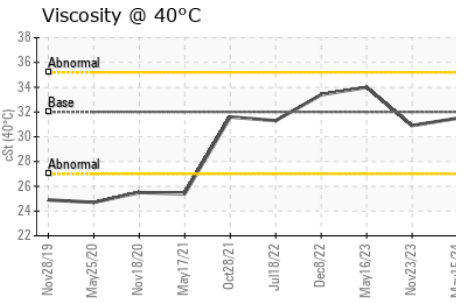
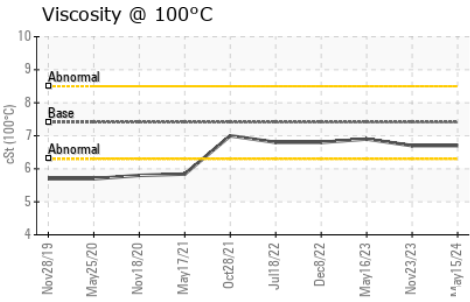
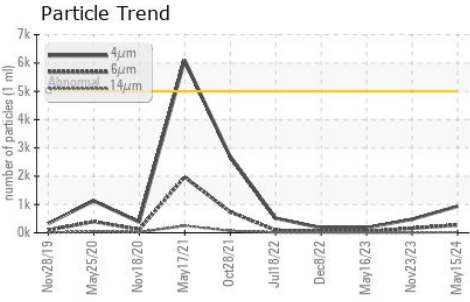
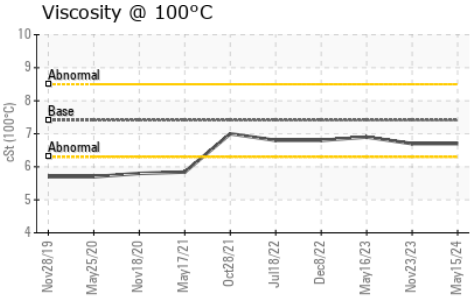


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	30.9	34.0
Visc @ 100°C	cSt	ASTM D445	7.41	6.7	6.9
Viscosity Index (VI)	Scale	ASTM D2270	211	177	168

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

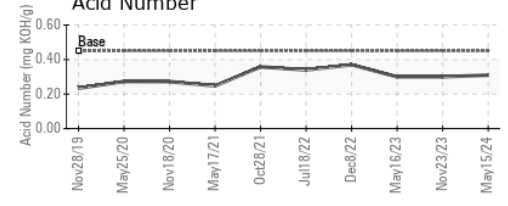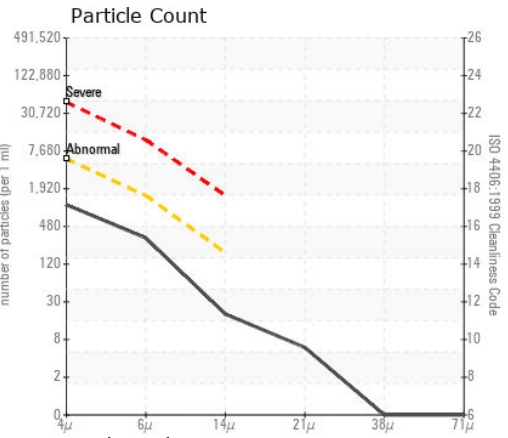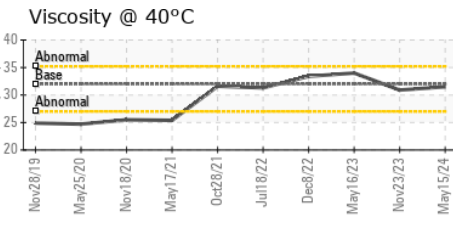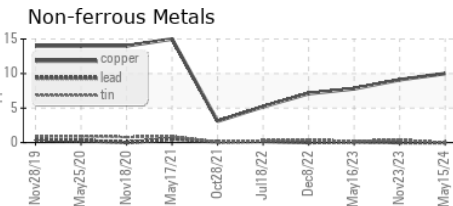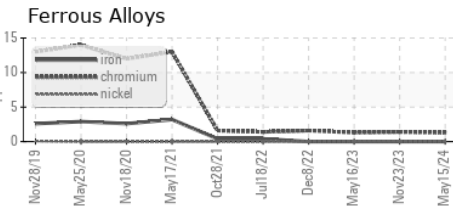

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0932121 **Received** : 12 Jul 2024  
**Lab Number** : 06234893 **Tested** : 15 Jul 2024  
**Unique Number** : 11123727 **Diagnosed** : 15 Jul 2024 - Don Baldrige  
**Test Package** : PLANT ( Additional Tests: KV100, VI )

**JPHYTEC**

JP  
Contact: Service

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: