OIL ANALYSIS REPORT

Sample Rating Trend

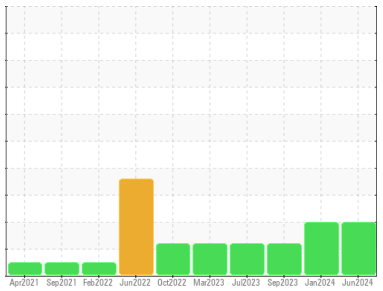

ISO

Area
DICK LAVY
Machine Id
DICK LAVY 4831
Component
Front Differential
Fluid
Differential Oil (--- GAL)

DIAGNOSIS

Recommendation
We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of particulates present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0934593**	WC0900826	WC0853910
Sample Date		Client Info		**06 Jun 2024**	10 Jan 2024	24 Sep 2023
Machine Age	mls	Client Info		**479785**	413786	375533
Oil Age	mls	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**ABNORMAL**	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	**218**	238	143
Chromium	ppm	ASTM D5185m	>10	**1**	2	1
Nickel	ppm	ASTM D5185m	>10	**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	<1	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>25	**1**	3	2
Lead	ppm	ASTM D5185m	>25	**0**	0	0
Copper	ppm	ASTM D5185m	>100	**1**	2	2
Tin	ppm	ASTM D5185m	>10	**0**	<1	<1
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**66**	69	80
Barium	ppm	ASTM D5185m		**<1**	0	0
Molybdenum	ppm	ASTM D5185m		**0**	0	0
Manganese	ppm	ASTM D5185m		**9**	10	8
Magnesium	ppm	ASTM D5185m		**145**	140	142
Calcium	ppm	ASTM D5185m		**11**	17	8
Phosphorus	ppm	ASTM D5185m		**1579**	1576	1545
Zinc	ppm	ASTM D5185m		**5**	7	0
Sulfur	ppm	ASTM D5185m		**24945**	24303	21654

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	**42**	42	32
Sodium	ppm	ASTM D5185m		**4**	2	5
Potassium	ppm	ASTM D5185m	>20	**<1**	2	2
Water	%	ASTM D6304	>.2	**0.039**	0.034	0.022
ppm Water	ppm	ASTM D6304	>2000	**399**	345	223.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ **295805**	▲ 161908	▲ 65040
Particles >6µm		ASTM D7647	>5000	▲ **136275**	▲ 66857	● 5228
Particles >14µm		ASTM D7647	>640	▲ **5648**	▲ 1909	121
Particles >21µm		ASTM D7647	>160	▲ **703**	▲ 225	25
Particles >38µm		ASTM D7647	>40	**8**	2	1
Particles >71µm		ASTM D7647	>10	**1**	0	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ **25/24/20**	▲ 25/23/18	▲ 23/20/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.86**	1.00	0.90

OIL ANALYSIS REPORT

Particle Trend

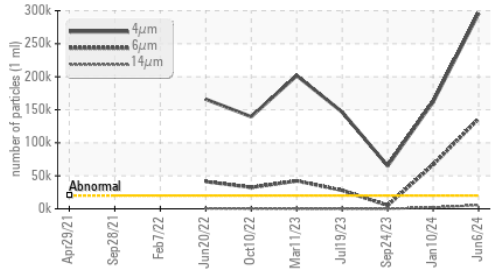

Water (KF)

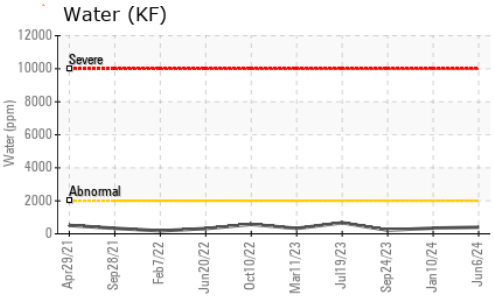

Viscosity @ 100°C

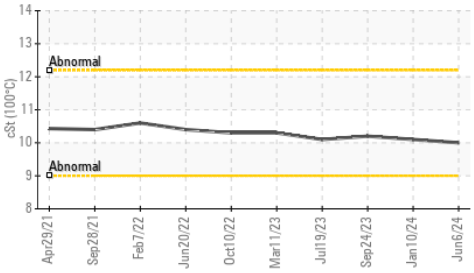

Water (KF)

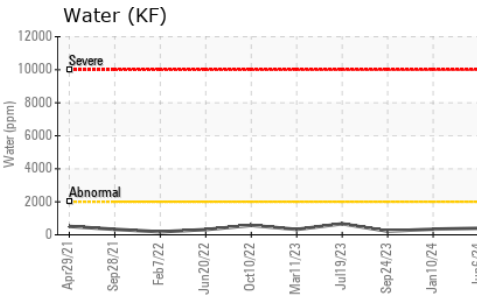

Viscosity @ 100°C

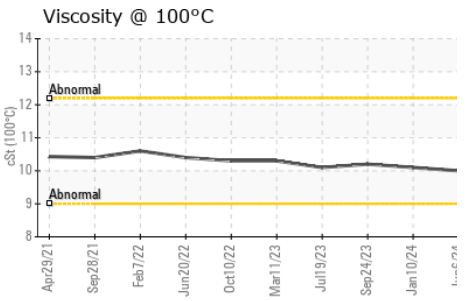

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**57.5**	56.7	57.0
Visc @ 100°C	cSt	ASTM D445		**10.0**	10.1	10.2
Viscosity Index (VI)	Scale	ASTM D2270		**161**	167	168

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

GRAPHS

Ferrous Alloys

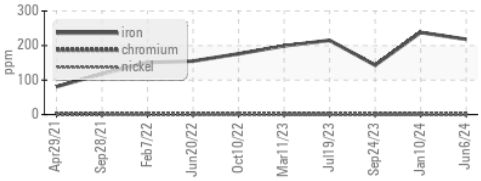

Non-ferrous Metals

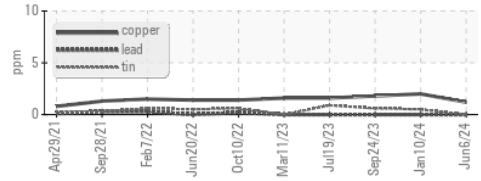

Viscosity @ 40°C

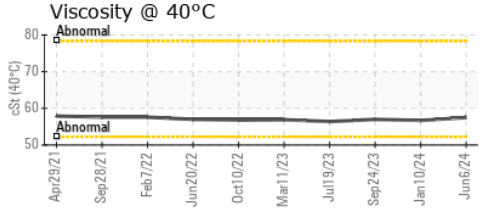

Particle Count

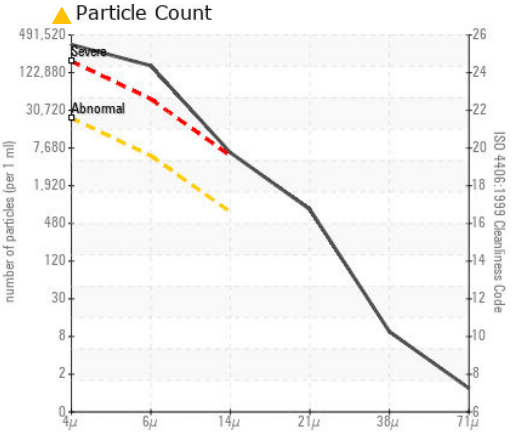

Acid Number

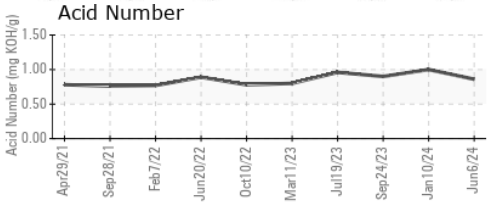

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0934593 **Received** : 12 Jul 2024
Lab Number : 06234898 **Tested** : 15 Jul 2024
Unique Number : 11123732 **Diagnosed** : 17 Jul 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BASF - MIKE BARRY
500 WHITE PLAINS RD
TARRYTOWN, NY
US 10591
Contact: ARJUN GOYAL
ARJUN.GOYAL@BASF.COM
T:
F: