

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER 8804390

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA019490	KCPA011376	
Sample Date		Client Info		24 Jun 2024	08 Nov 2023	
Machine Age	hrs	Client Info		3038	1395	
Oil Age	hrs	Client Info		3038	0	
Oil Changed		Client Info		Changed	N/A	
Sample Status				ATTENTION	MARGINAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	2	
Chromium	ppm	ASTM D5185m	>10	0	<1	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	0	<1	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	<1	
Lead	ppm	ASTM D5185m	>10	0	2	
Copper	ppm	ASTM D5185m	>50	8	2	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	90	10	0	
Calcium	ppm	ASTM D5185m	2	1	0	
Phosphorus	ppm	ASTM D5185m		4	0	
Zinc	ppm	ASTM D5185m		6	0	
Sulfur	ppm	ASTM D5185m		18997	18098	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	4	
Sodium	ppm	ASTM D5185m		7	16	
Potassium	ppm	ASTM D5185m	>20	<1	3	
Water	%	ASTM D6304	>0.05	0.012	0.051	
ppm Water	ppm	ASTM D6304	>500	129	▲ 510.0	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2916		
Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1538		
Particles >14µm		ASTM D7647	>80	59		
Particles >21µm		ASTM D7647	>20	8		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13) 19/18/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.33	0.31	



OIL ANALYSIS REPORT

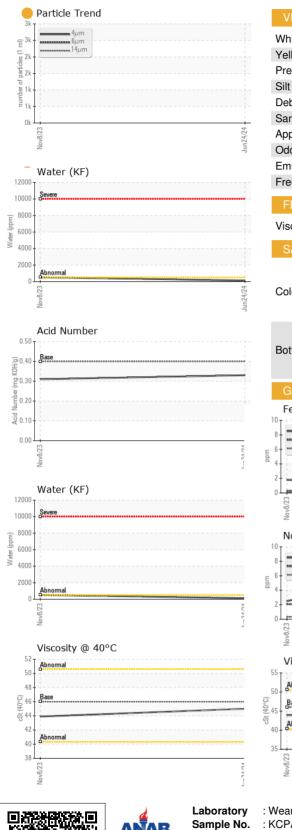

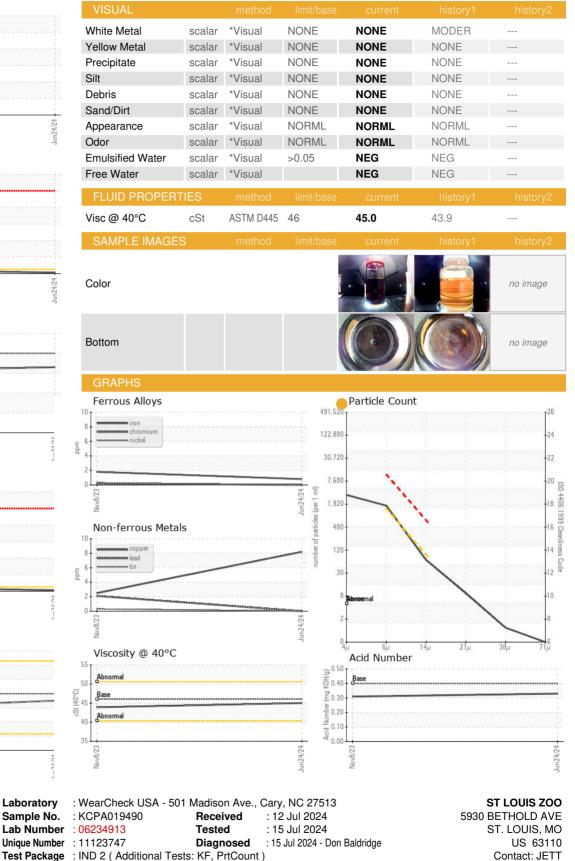

Certificate 12367

Lab Number

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

JETT@STLZOO.COM